


iNEMO inertial module: always-on 3D accelerometer and 3D gyroscope

Datasheet - production data



LGA-14L (2.5 x 3 x 0.83 mm) typ.

Features

- Power consumption: 0.9 mA in combo normal mode and 1.25 mA in combo high-performance mode up to 1.6 kHz.
- “Always on” experience with low power consumption for both accelerometer and gyroscope
- Smart FIFO up to 8 kbyte based on features set
- Compliant with Android K and L
- Hard, soft ironing for external magnetic sensor corrections
- $\pm 2/\pm 4/\pm 8/\pm 16\text{ g}$ full scale
- $\pm 125/\pm 245/\pm 500/\pm 1000/\pm 2000\text{ dps}$ full scale
- Analog supply voltage: 1.71 V to 3.6 V
- Independent IOs supply (1.62 V)
- Compact footprint, 2.5 mm x 3 mm x 0.83 mm
- SPI/I²C serial interface with main processor data synchronization feature
- Embedded temperature sensor
- ECOPACK®, RoHS and “Green” compliant

Applications

- Pedometer, step detector and step counter
- Significant motion and tilt functions
- Indoor navigation
- Tap and double-tap detection
- IoT and connected devices
- Intelligent power saving for handheld devices
- Vibration monitoring and compensation
- Free-fall detection
- 6D orientation detection

Description

The LSM6DS3 is a system-in-package featuring a 3D digital accelerometer and a 3D digital gyroscope performing at 1.25 mA (up to 1.6 kHz ODR) in high-performance mode and enabling always-on low-power features for an optimal motion experience for the consumer.

The LSM6DS3 supports main OS requirements, offering real, virtual and batch sensors with 8 kbyte for dynamic data batching.

ST’s family of MEMS sensor modules leverages the robust and mature manufacturing processes already used for the production of micromachined accelerometers and gyroscopes.

The various sensing elements are manufactured using specialized micromachining processes, while the IC interfaces are developed using CMOS technology that allows the design of a dedicated circuit which is trimmed to better match the characteristics of the sensing element.

The LSM6DS3 has a full-scale acceleration range of $\pm 2/\pm 4/\pm 8/\pm 16\text{ g}$ and an angular rate range of $\pm 125/\pm 245/\pm 500/\pm 1000/\pm 2000\text{ dps}$.

High robustness to mechanical shock makes the LSM6DS3 the preferred choice of system designers for the creation and manufacturing of reliable products.

The LSM6DS3 is available in a plastic land grid array (LGA) package.

Table 1. Device summary

| Part number | Temperature range [°C] | Package | Packing |
|-------------|------------------------|--------------------------------|-------------|
| LSM6DS3 | -40 to +85 | LGA-14L (2.5 x 3 x 0.83 mm) | Tray |
| LSM6DS3TR | -40 to +85 | | Tape & Reel |

Contents

| | | |
|----------|---|-----------|
| 1 | Overview | 15 |
| 2 | Embedded low-power features | 16 |
| 2.1 | Tilt detection | 16 |
| 3 | Pin description | 17 |
| 4 | Module specifications | 19 |
| 4.1 | Mechanical characteristics | 19 |
| 4.2 | Electrical characteristics | 21 |
| 4.3 | Temperature sensor characteristics | 22 |
| 4.4 | Communication interface characteristics | 23 |
| 4.4.1 | SPI - serial peripheral interface | 23 |
| 4.4.2 | I ² C - inter-IC control interface | 24 |
| 4.5 | Absolute maximum ratings | 25 |
| 4.6 | Terminology | 26 |
| 4.6.1 | Sensitivity | 26 |
| 4.6.2 | Zero-g and zero-rate level | 26 |
| 5 | Functionality | 27 |
| 5.1 | Operating modes | 27 |
| 5.2 | Gyroscope power modes | 27 |
| 5.3 | Accelerometer power modes | 27 |
| 5.4 | FIFO | 27 |
| 5.4.1 | Bypass mode | 28 |
| 5.4.2 | FIFO mode | 28 |
| 5.4.3 | Continuous mode | 29 |
| 5.4.4 | Continuous-to-FIFO mode | 29 |
| 5.4.5 | Bypass-to-Continuous mode | 29 |
| 5.4.6 | FIFO reading procedure | 29 |
| 5.4.7 | Filter block diagrams | 30 |
| 6 | Digital interfaces | 32 |

| | | |
|-------|--|-----------|
| 6.1 | I ² C serial interface | 32 |
| 6.1.1 | I ² C operation | 33 |
| 6.2 | SPI bus interface | 34 |
| 6.2.1 | SPI read | 35 |
| 6.2.2 | SPI write | 36 |
| 6.2.3 | SPI read in 3-wire mode | 37 |
| 7 | Application hints | 38 |
| 7.1 | LSM6DS3 electrical connections in Mode 1 | 38 |
| 7.2 | LSM6DS3 electrical connections in Mode 2 | 39 |
| 7.3 | LSM6DS3 electrical connections in Mode 3 | 40 |
| 8 | Register mapping | 41 |
| 9 | Register description | 45 |
| 9.1 | FUNC_CFG_ACCESS (01h) | 45 |
| 9.2 | SENSOR_SYNC_TIME_FRAME (04h) | 45 |
| 9.3 | FIFO_CTRL1 (06h) | 45 |
| 9.4 | FIFO_CTRL2 (07h) | 46 |
| 9.5 | FIFO_CTRL3 (08h) | 46 |
| 9.6 | FIFO_CTRL4 (09h) | 47 |
| 9.7 | FIFO_CTRL5 (0Ah) | 48 |
| 9.8 | ORIENT_CFG_G (0Bh) | 49 |
| 9.9 | INT1_CTRL (0Dh) | 50 |
| 9.10 | INT2_CTRL (0Eh) | 51 |
| 9.11 | WHO_AM_I (0Fh) | 51 |
| 9.12 | CTRL1_XL (10h) | 51 |
| 9.13 | CTRL2_G (11h) | 53 |
| 9.14 | CTRL3_C (12h) | 54 |
| 9.15 | CTRL4_C (13h) | 55 |
| 9.16 | CTRL5_C (14h) | 55 |
| 9.17 | CTRL6_C (15h) | 57 |
| 9.18 | CTRL7_G (16h) | 57 |
| 9.19 | CTRL8_XL (17h) | 58 |

| | | |
|------|---------------------------------------|----|
| 9.20 | CTRL9_XL (18h) | 58 |
| 9.21 | CTRL10_C (19h) | 59 |
| 9.22 | MASTER_CONFIG (1Ah) | 60 |
| 9.23 | WAKE_UP_SRC (1Bh) | 60 |
| 9.24 | TAP_SRC (1Ch) | 61 |
| 9.25 | D6D_SRC (1Dh) | 62 |
| 9.26 | STATUS_REG (1Eh) | 62 |
| 9.27 | OUT_TEMP_L (20h), OUT_TEMP(21h) | 63 |
| 9.28 | OUTX_L_G (22h) | 63 |
| 9.29 | OUTX_H_G (23h) | 63 |
| 9.30 | OUTY_L_G (24h) | 63 |
| 9.31 | OUTY_H_G (25h) | 64 |
| 9.32 | OUTZ_L_G (26h) | 64 |
| 9.33 | OUTZ_H_G (27h) | 64 |
| 9.34 | OUTX_L_XL (28h) | 64 |
| 9.35 | OUTX_H_XL (29h) | 65 |
| 9.36 | OUTY_L_XL (2Ah) | 65 |
| 9.37 | OUTY_H_XL (2Bh) | 65 |
| 9.38 | OUTZ_L_XL (2Ch) | 65 |
| 9.39 | OUTZ_H_XL (2Dh) | 66 |
| 9.40 | SENSORHUB1_REG (2Eh) | 66 |
| 9.41 | SENSORHUB2_REG (2Fh) | 66 |
| 9.42 | SENSORHUB3_REG (30h) | 66 |
| 9.43 | SENSORHUB4_REG (31h) | 67 |
| 9.44 | SENSORHUB5_REG (32h) | 67 |
| 9.45 | SENSORHUB6_REG (33h) | 67 |
| 9.46 | SENSORHUB7_REG (34h) | 67 |
| 9.47 | SENSORHUB8_REG(35h) | 68 |
| 9.48 | SENSORHUB9_REG (36h) | 68 |
| 9.49 | SENSORHUB10_REG (37h) | 68 |
| 9.50 | SENSORHUB11_REG (38h) | 68 |
| 9.51 | SENSORHUB12_REG(39h) | 69 |
| 9.52 | FIFO_STATUS1 (3Ah) | 69 |

| | | |
|------|------------------------------|----|
| 9.53 | FIFO_STATUS2 (3Bh) | 69 |
| 9.54 | FIFO_STATUS3 (3Ch) | 70 |
| 9.55 | FIFO_STATUS4 (3Dh) | 70 |
| 9.56 | FIFO_DATA_OUT_L (3Eh) | 70 |
| 9.57 | FIFO_DATA_OUT_H (3Fh) | 70 |
| 9.58 | TIMESTAMP0_REG (40h) | 71 |
| 9.59 | TIMESTAMP1_REG (41h) | 71 |
| 9.60 | TIMESTAMP2_REG (42h) | 71 |
| 9.61 | STEP_TIMESTAMP_L (49h) | 72 |
| 9.62 | STEP_TIMESTAMP_H (4Ah) | 72 |
| 9.63 | STEP_COUNTER_L (4Bh) | 72 |
| 9.64 | STEP_COUNTER_H (4Ch) | 72 |
| 9.65 | SENSORHUB13_REG (4Dh) | 73 |
| 9.66 | SENSORHUB14_REG (4Eh) | 73 |
| 9.67 | SENSORHUB15_REG (4Fh) | 73 |
| 9.68 | SENSORHUB16_REG (50h) | 73 |
| 9.69 | SENSORHUB17_REG (51h) | 74 |
| 9.70 | SENSORHUB18_REG (52h) | 74 |
| 9.71 | FUNC_SRC (53h) | 74 |
| 9.72 | TAP_CFG (58h) | 75 |
| 9.73 | TAP_THS_6D (59h) | 75 |
| 9.74 | INT_DUR2 (5Ah) | 76 |
| 9.75 | WAKE_UP_THS (5Bh) | 76 |
| 9.76 | WAKE_UP_DUR (5Ch) | 77 |
| 9.77 | FREE_FALL (5Dh) | 77 |
| 9.78 | MD1_CFG (5Eh) | 78 |
| 9.79 | MD2_CFG (5Fh) | 79 |
| 9.80 | OUT_MAG_RAW_X_L (66h) | 79 |
| 9.81 | OUT_MAG_RAW_X_H (67h) | 79 |
| 9.82 | OUT_MAG_RAW_Y_L (68h) | 80 |
| 9.83 | OUT_MAG_RAW_Y_H (69h) | 80 |
| 9.84 | OUT_MAG_RAW_Z_L (6Ah) | 80 |
| 9.85 | OUT_MAG_RAW_Z_H (6Bh) | 80 |

| | | |
|-----------|---|-----------|
| 10 | Embedded functions register mapping | 81 |
| 11 | Embedded functions registers description | 83 |
| 11.1 | SLV0_ADD (02h) | 83 |
| 11.2 | SLV0_SUBADD (03h) | 83 |
| 11.3 | SLAVE0_CONFIG (04h) | 83 |
| 11.4 | SLV1_ADD (05h) | 84 |
| 11.5 | SLV1_SUBADD (06h) | 84 |
| 11.6 | SLAVE1_CONFIG (07h) | 85 |
| 11.7 | SLV2_ADD (08h) | 85 |
| 11.8 | SLV2_SUBADD (09h) | 85 |
| 11.9 | SLAVE2_CONFIG (0Ah) | 86 |
| 11.10 | SLV3_ADD (0Bh) | 86 |
| 11.11 | SLV3_SUBADD (0Ch) | 86 |
| 11.12 | SLAVE3_CONFIG (0Dh) | 87 |
| 11.13 | DATAWRITE_SRC_MODE_SUB_SLV0 (0Eh) | 87 |
| 11.14 | SM_THS (13h) | 87 |
| 11.15 | STEP_COUNT_DELTA (15h) | 88 |
| 11.16 | MAG_SI_XX (24h) | 88 |
| 11.17 | MAG_SI_XY (25h) | 88 |
| 11.18 | MAG_SI_XZ (26h) | 88 |
| 11.19 | MAG_SI_YX (27h) | 89 |
| 11.20 | MAG_SI_YY (28h) | 89 |
| 11.21 | MAG_SI_YZ (29h) | 89 |
| 11.22 | MAG_SI_ZX (2Ah) | 89 |
| 11.23 | MAG_SI_ZY (2Bh) | 90 |
| 11.24 | MAG_SI_ZZ (2Ch) | 90 |
| 11.25 | MAG_OFFSET_X_L (2Dh) | 90 |
| 11.26 | MAG_OFFSET_X_H (2Eh) | 90 |
| 11.27 | MAG_OFFSET_Y_L (2Fh) | 91 |
| 11.28 | MAG_OFFSET_Y_H (30h) | 91 |
| 11.29 | MAG_OFFSET_Z_L (31h) | 91 |
| 11.30 | MAG_OFFSET_Z_H (32h) | 91 |

| | | |
|-----------|------------------------------|-----------|
| 12 | Soldering information | 92 |
| 13 | Package information | 93 |
| 13.1 | LGA-14 package information | 93 |
| 14 | Revision history | 94 |

List of tables

| | | |
|-----------|---|----|
| Table 1. | Device summary | 1 |
| Table 2. | Pin description | 18 |
| Table 3. | Mechanical characteristics | 19 |
| Table 4. | Electrical characteristics | 21 |
| Table 5. | Temperature sensor characteristics | 22 |
| Table 6. | SPI slave timing values | 23 |
| Table 7. | I ² C slave timing values | 24 |
| Table 8. | Absolute maximum ratings | 25 |
| Table 9. | Serial interface pin description | 32 |
| Table 10. | I ² C terminology | 32 |
| Table 11. | SAD+Read/Write patterns | 33 |
| Table 12. | Transfer when master is writing one byte to slave | 33 |
| Table 13. | Transfer when master is writing multiple bytes to slave | 33 |
| Table 14. | Transfer when master is receiving (reading) one byte of data from slave | 34 |
| Table 15. | Transfer when master is receiving (reading) multiple bytes of data from slave | 34 |
| Table 16. | Registers address map | 41 |
| Table 17. | FUNC_CFG_ACCESS register | 45 |
| Table 18. | FUNC_CFG_ACCESS register description | 45 |
| Table 19. | SENSOR_SYNC_TIME_FRAME register | 45 |
| Table 20. | ISENSOR_SYNC_TIME_FRAME register description | 45 |
| Table 21. | FIFO_CTRL1 register | 45 |
| Table 22. | FIFO_CTRL1 register description | 45 |
| Table 23. | FIFO_CTRL2 register | 46 |
| Table 24. | FIFO_CTRL2 register description | 46 |
| Table 25. | FIFO_CTRL3 register | 46 |
| Table 26. | FIFO_CTRL3 register description | 46 |
| Table 27. | Gyro FIFO decimation setting | 47 |
| Table 28. | Accelerometer FIFO decimation setting | 47 |
| Table 29. | FIFO_CTRL4 register | 47 |
| Table 30. | FIFO_CTRL4 register description | 47 |
| Table 31. | Fourth FIFO data set decimation setting | 48 |
| Table 32. | Third FIFO data set decimation setting | 48 |
| Table 33. | FIFO_CTRL5 register | 48 |
| Table 34. | FIFO_CTRL5 register description | 48 |
| Table 35. | FIFO ODR selection | 49 |
| Table 36. | FIFO mode selection | 49 |
| Table 37. | ORIENT_CFG_G register | 49 |
| Table 38. | ORIENT_CFG_G register description | 50 |
| Table 39. | Settings for orientation of axes | 50 |
| Table 40. | INT1_CTRL register | 50 |
| Table 41. | INT1_CTRL register description | 50 |
| Table 42. | INT2_CTRL register | 51 |
| Table 43. | INT2_CTRL register description | 51 |
| Table 44. | WHO_AM_I register | 51 |
| Table 45. | CTRL1_XL register | 51 |
| Table 46. | CTRL1_XL register description | 52 |
| Table 47. | Accelerometer ODR register setting | 52 |
| Table 48. | BW and ODR (high-performance mode) | 52 |

| | | |
|------------|---|----|
| Table 49. | CTRL2_G register | 53 |
| Table 50. | CTRL2_G register description | 53 |
| Table 51. | Gyroscope ODR configuration setting | 53 |
| Table 52. | CTRL3_C register | 54 |
| Table 53. | CTRL3_C register description | 54 |
| Table 54. | CTRL4_C register | 55 |
| Table 55. | CTRL4_C register description | 55 |
| Table 56. | CTRL5_C register | 55 |
| Table 57. | CTRL5_C register description | 56 |
| Table 58. | Output registers rounding pattern | 56 |
| Table 59. | Angular rate sensor self-test mode selection | 56 |
| Table 60. | Linear acceleration sensor self-test mode selection | 56 |
| Table 61. | CTRL6_C register | 57 |
| Table 62. | CTRL6_C register description | 57 |
| Table 63. | CTRL7_G register | 57 |
| Table 64. | CTRL7_G register description | 57 |
| Table 65. | Gyroscope high-pass filter mode configuration | 58 |
| Table 66. | CTRL8_XL register | 58 |
| Table 67. | CTRL8_XL register description | 58 |
| Table 68. | Accelerometer slope and high-pass filter selection and cutoff frequency | 58 |
| Table 69. | CTRL9_XL register | 58 |
| Table 70. | CTRL9_XL register description | 59 |
| Table 71. | CTRL10_C register | 59 |
| Table 72. | CTRL10_C register description | 59 |
| Table 73. | MASTER_CONFIG register | 60 |
| Table 74. | MASTER_CONFIG register description | 60 |
| Table 75. | WAKE_UP_SRC register | 60 |
| Table 76. | WAKE_UP_SRC register description | 61 |
| Table 77. | TAP_SRC register | 61 |
| Table 78. | TAP_SRC register description | 61 |
| Table 79. | D6D_SRC register | 62 |
| Table 80. | D6D_SRC register description | 62 |
| Table 81. | STATUS_REG register | 62 |
| Table 82. | STATUS_REG register description | 62 |
| Table 83. | OUT_TEMP_L register | 63 |
| Table 84. | OUT_TEMP_H register | 63 |
| Table 85. | OUT_TEMP register description | 63 |
| Table 86. | OUTX_L_G register | 63 |
| Table 87. | OUTX_L_G register description | 63 |
| Table 88. | OUTX_H_G register | 63 |
| Table 89. | OUTX_H_G register description | 63 |
| Table 90. | OUTY_L_G register | 63 |
| Table 91. | OUTY_L_G register description | 63 |
| Table 92. | OUTY_H_G register | 64 |
| Table 93. | OUTY_H_G register description | 64 |
| Table 94. | OUTZ_L_G register | 64 |
| Table 95. | OUTZ_L_G register description | 64 |
| Table 96. | OUTZ_H_G register | 64 |
| Table 97. | OUTZ_H_G register description | 64 |
| Table 98. | OUTX_L_XL register | 64 |
| Table 99. | OUTX_L_XL register description | 64 |
| Table 100. | OUTX_H_XL register | 65 |

| | | |
|------------|--|----|
| Table 101. | OUTX_H_XL register description | 65 |
| Table 102. | OUTY_L_XL register | 65 |
| Table 103. | OUTY_L_XL register description | 65 |
| Table 104. | OUTY_H_G register | 65 |
| Table 105. | OUTY_H_G register description | 65 |
| Table 106. | OUTZ_L_XL register | 65 |
| Table 107. | OUTZ_L_XL register description | 65 |
| Table 108. | OUTZ_H_XL register | 66 |
| Table 109. | OUTZ_H_XL register description | 66 |
| Table 110. | SENSORHUB1_REG register | 66 |
| Table 111. | SENSORHUB1_REG register description | 66 |
| Table 112. | SENSORHUB2_REG register | 66 |
| Table 113. | SENSORHUB2_REG register description | 66 |
| Table 114. | SENSORHUB3_REG register | 66 |
| Table 115. | SENSORHUB3_REG register description | 66 |
| Table 116. | SENSORHUB4_REG register | 67 |
| Table 117. | SENSORHUB4_REG register description | 67 |
| Table 118. | SENSORHUB5_REG register | 67 |
| Table 119. | SENSORHUB5_REG register description | 67 |
| Table 120. | SENSORHUB6_REG register | 67 |
| Table 121. | SENSORHUB6_REG register description | 67 |
| Table 122. | SENSORHUB7_REG register | 67 |
| Table 123. | SENSORHUB7_REG register description | 67 |
| Table 124. | SENSORHUB8_REG register | 68 |
| Table 125. | SENSORHUB8_REG register description | 68 |
| Table 126. | SENSORHUB9_REG register | 68 |
| Table 127. | SENSORHUB9_REG register description | 68 |
| Table 128. | SENSORHUB10_REG register | 68 |
| Table 129. | SENSORHUB10_REG register description | 68 |
| Table 130. | SENSORHUB11_REG register | 68 |
| Table 131. | SENSORHUB11_REG register description | 68 |
| Table 132. | SENSORHUB12_REG register | 69 |
| Table 133. | SENSORHUB12_REG register description | 69 |
| Table 134. | FIFO_STATUS1 register | 69 |
| Table 135. | FIFO_STATUS1 register description | 69 |
| Table 136. | FIFO_STATUS2 register | 69 |
| Table 137. | FIFO_STATUS2 register description | 69 |
| Table 138. | FIFO_STATUS3 register | 70 |
| Table 139. | FIFO_STATUS3 register description | 70 |
| Table 140. | FIFO_STATUS4 register | 70 |
| Table 141. | FIFO_STATUS4 register description | 70 |
| Table 142. | FIFO_DATA_OUT_L register | 70 |
| Table 143. | FIFO_DATA_OUT_L register description | 70 |
| Table 144. | FIFO_DATA_OUT_H register | 71 |
| Table 145. | FIFO_DATA_OUT_H register description | 71 |
| Table 146. | TIMESTAMP0_REG register | 71 |
| Table 147. | TIMESTAMP0_REG register description | 71 |
| Table 148. | TIMESTAMP1_REG register | 71 |
| Table 149. | TIMESTAMP1_REG register description | 71 |
| Table 150. | TIMESTAMP2_REG register | 71 |
| Table 151. | TIMESTAMP2_REG register description | 71 |
| Table 152. | STEP_TIMESTAMP_L register | 72 |

| | |
|---|----|
| Table 153. STEP_TIMESTAMP_L register description | 72 |
| Table 154. STEP_TIMESTAMP_H register | 72 |
| Table 155. STEP_TIMESTAMP_H register description | 72 |
| Table 156. STEP_COUNTER_L register | 72 |
| Table 157. STEP_COUNTER_L register description | 72 |
| Table 158. STEP_COUNTER_H register | 72 |
| Table 159. STEP_COUNTER_H register description | 72 |
| Table 160. SENSORHUB13_REG register | 73 |
| Table 161. SENSORHUB13_REG register description | 73 |
| Table 162. SENSORHUB14_REG register | 73 |
| Table 163. SENSORHUB14_REG register description | 73 |
| Table 164. SENSORHUB15_REG register | 73 |
| Table 165. SENSORHUB15_REG register description | 73 |
| Table 166. SENSORHUB16_REG register | 73 |
| Table 167. SENSORHUB16_REG register description | 73 |
| Table 168. SENSORHUB17_REG register | 74 |
| Table 169. SENSORHUB17_REG register description | 74 |
| Table 170. SENSORHUB18_REG register | 74 |
| Table 171. SENSORHUB18_REG register description | 74 |
| Table 172. FUNC_SRC register | 74 |
| Table 173. FUNC_SRC register description | 74 |
| Table 174. TAP_CFG register | 75 |
| Table 175. TAP_CFG register description | 75 |
| Table 176. TAP_THS_6D register | 75 |
| Table 177. TAP_THS_6D register description | 75 |
| Table 178. Threshold for D4D/D6D function | 76 |
| Table 179. INT_DUR2 register | 76 |
| Table 180. INT_DUR2 register description | 76 |
| Table 181. WAKE_UP_THS register | 76 |
| Table 182. WAKE_UP_THS register description | 77 |
| Table 183. WAKE_UP_DUR register | 77 |
| Table 184. WAKE_UP_DUR register description | 77 |
| Table 185. FREE_FALL register | 77 |
| Table 186. FREE_FALL register description | 77 |
| Table 187. Threshold for free-fall function | 78 |
| Table 188. MD1_CFG register | 78 |
| Table 189. MD1_CFG register description | 78 |
| Table 190. MD2_CFG register | 79 |
| Table 191. MD2_CFG register description | 79 |
| Table 192. OUT_MAG_RAW_X_L register | 79 |
| Table 193. OUT_MAG_RAW_X_L register description | 79 |
| Table 194. OUT_MAG_RAW_X_H register | 79 |
| Table 195. OUT_MAG_RAW_X_H register description | 80 |
| Table 196. OUT_MAG_RAW_Y_L register | 80 |
| Table 197. OUT_MAG_RAW_Y_L register description | 80 |
| Table 198. OUT_MAG_RAW_Y_H register | 80 |
| Table 199. OUT_MAG_RAW_Y_H register description | 80 |
| Table 200. OUT_MAG_RAW_Z_L register | 80 |
| Table 201. OUT_MAG_RAW_Z_L register description | 80 |
| Table 202. OUT_MAG_RAW_Z_H register | 80 |
| Table 203. OUT_MAG_RAW_Z_H register description | 80 |
| Table 204. Registers address map - embedded functions | 81 |

| | | |
|------------|--|----|
| Table 205. | SLV0_ADD register | 83 |
| Table 206. | SLV0_ADD register description | 83 |
| Table 207. | SLV0_SUBADD register | 83 |
| Table 208. | SLV0_SUBADD register description | 83 |
| Table 209. | SLAVE0_CONFIG register | 83 |
| Table 210. | SLAVE0_CONFIG register description | 84 |
| Table 211. | SLV1_ADD register | 84 |
| Table 212. | SLV1_ADD register description | 84 |
| Table 213. | SLV1_SUBADD register | 84 |
| Table 214. | SLV1_SUBADD register description | 84 |
| Table 215. | SLAVE1_CONFIG register | 85 |
| Table 216. | SLAVE1_CONFIG register description | 85 |
| Table 217. | SLV2_ADD register | 85 |
| Table 218. | SLV2_ADD register description | 85 |
| Table 219. | SLV2_SUBADD register | 85 |
| Table 220. | SLV2_SUBADD register description | 85 |
| Table 221. | SLAVE2_CONFIG register | 86 |
| Table 222. | SLAVE2_CONFIG register description | 86 |
| Table 223. | SLV3_ADD register | 86 |
| Table 224. | SLV3_ADD register description | 86 |
| Table 225. | SLV3_SUBADD register | 86 |
| Table 226. | SLV3_SUBADD register description | 86 |
| Table 227. | SLAVE3_CONFIG register | 87 |
| Table 228. | SLAVE3_CONFIG register description | 87 |
| Table 229. | DATAWRITE_SRC_MODE_SUB_SLV0 register | 87 |
| Table 230. | DATAWRITE_SRC_MODE_SUB_SLV0 register description | 87 |
| Table 231. | SM THS register | 87 |
| Table 232. | SM THS register description | 87 |
| Table 233. | STEP_COUNT_DELTA register | 88 |
| Table 234. | STEP_COUNT_DELTA register description | 88 |
| Table 235. | MAG_SI_XX register | 88 |
| Table 236. | MAG_SI_XX register description | 88 |
| Table 237. | MAG_SI_XY register | 88 |
| Table 238. | MAG_SI_XY register description | 88 |
| Table 239. | MAG_SI_XZ register | 88 |
| Table 240. | MAG_SI_XZ register description | 88 |
| Table 241. | MAG_SI_YX register | 89 |
| Table 242. | MAG_SI_YX register description | 89 |
| Table 243. | MAG_SI_YY register | 89 |
| Table 244. | MAG_SI_YY register description | 89 |
| Table 245. | MAG_SI_YZ register | 89 |
| Table 246. | MAG_SI_YZ register description | 89 |
| Table 247. | MAG_SI_ZX register | 89 |
| Table 248. | MAG_SI_ZX register description | 89 |
| Table 249. | MAG_SI_ZY register | 90 |
| Table 250. | MAG_SI_ZY register description | 90 |
| Table 251. | MAG_SI_ZZ register | 90 |
| Table 252. | MAG_SI_ZZ register description | 90 |
| Table 253. | MAG_OFFSETX_L register | 90 |
| Table 254. | MAG_OFFSETX_L register description | 90 |
| Table 255. | MAG_OFFSETX_H register | 90 |
| Table 256. | MAG_OFFSETX_L register description | 90 |

| | |
|--|----|
| Table 257. MAG_OFFY_L register | 91 |
| Table 258. MAG_OFFY_L register description | 91 |
| Table 259. MAG_OFFY_H register | 91 |
| Table 260. MAG_OFFY_L register description | 91 |
| Table 261. MAG_OFFZ_L register | 91 |
| Table 262. MAG_OFFZ_L register description | 91 |
| Table 263. MAG_OFFZ_H register | 91 |
| Table 264. MAG_OFFX_L register description | 91 |
| Table 265. Document revision history | 94 |

List of figures

| | | |
|------------|---|----|
| Figure 1. | Pin connections | 17 |
| Figure 2. | SPI slave timing diagram | 23 |
| Figure 3. | I ² C slave timing diagram | 24 |
| Figure 4. | Accelerometer chain | 30 |
| Figure 5. | Accelerometer composite filter | 30 |
| Figure 6. | Gyroscope chain | 31 |
| Figure 7. | Read and write protocol | 34 |
| Figure 8. | SPI read protocol | 35 |
| Figure 9. | Multiple byte SPI read protocol (2-byte example) | 36 |
| Figure 10. | SPI write protocol | 36 |
| Figure 11. | Multiple byte SPI write protocol (2-byte example) | 36 |
| Figure 12. | SPI read protocol in 3-wire mode | 37 |
| Figure 13. | LSM6DS3 electrical connections in Mode 1 | 38 |
| Figure 14. | LSM6DS3 electrical connections in Mode 2 | 39 |
| Figure 15. | LSM6DS3 electrical connections in Mode 3 | 40 |
| Figure 16. | LGA-14 2.5x3x0.86 14L package outline and mechanical data | 93 |

1 Overview

The LSM6DS3 is a system-in-package featuring a high-performance 3-axis digital accelerometer and 3-axis digital gyroscope.

The integrated power-efficient modes are able to reduce the power consumption down to 1.25 mA in high-performance mode, combining always-on low-power features with superior sensing precision for an optimal motion experience for the consumer thanks to ultra-low noise performance for both the gyroscope and accelerometer.

The LSM6DS3 delivers best-in-class motion sensing that can detect orientation and gestures in order to empower application developers and consumers with features and capabilities that are more sophisticated than simply orienting their devices to portrait and landscape mode.

The event-detection interrupts enable efficient and reliable motion tracking and contextual awareness, implementing hardware recognition of free-fall events, 6D orientation, tap and double-tap sensing, activity or inactivity, and wakeup events.

The LSM6DS3 supports main OS requirements, offering real, virtual and batch mode sensors. In addition, the LSM6DS3 can efficiently run the sensor-related features specified in Android, saving power and enabling faster reaction time. In particular, the LSM6DS3 has been designed to implement hardware features such as significant motion, tilt, pedometer functions, time stamping and to support the data acquisition of an external magnetometer with ironing correction (hard, soft).

The LSM6DS3 offers hardware flexibility to connect the pins with different mode connections to external sensors to expand functionalities such as adding a sensor hub, auxiliary SPI, etc.

Up to 8 kbyte of FIFO with dynamic allocation of significant data (i.e. external sensors, time stamp, etc.) allows overall power saving of the system.

Like the entire portfolio of MEMS sensor modules, the LSM6DS3 leverages on the robust and mature in-house manufacturing processes already used for the production of micromachined accelerometers and gyroscopes. The various sensing elements are manufactured using specialized micromachining processes, while the IC interfaces are developed using CMOS technology that allows the design of a dedicated circuit which is trimmed to better match the characteristics of the sensing element.

The LSM6DS3 is available in a small plastic land grid array (LGA) package of 2.5 x 3.0 x 0.83 mm to address ultra-compact solutions.

2 Embedded low-power features

The LSM6DS3 has been designed to be fully compliant with Android, featuring the following on-chip functions:

- 8 kbyte data buffering
 - 100% efficiency with flexible configurations and partitioning
 - possibility to store time stamp
- Event-detection interrupts (fully configurable):
 - free-fall
 - wakeup
 - 6D orientation
 - tap and double-tap sensing
 - activity / inactivity recognition
- Specific IP blocks with negligible power consumption and high-performance:
 - pedometer functions: step detector and step counters
 - tilt (Android compliant, refer to [Section 2.1: Tilt detection](#) for additional info)
 - significant motion (Android compliant)
- Sensor hub
 - up to 6 total sensors: 2 internal (accelerometer and gyroscope) and 4 external sensors
- Data rate synchronization with external trigger for reduced sensor access and enhanced fusion

2.1 Tilt detection

The tilt function helps to detect activity change and has been implemented in hardware using only the accelerometer to achieve both the targets of ultra-low power consumption and robustness during the short duration of dynamic accelerations.


It is based on a trigger of an event each time the device's tilt changes by an angle greater than 35 degrees from the start position.

The tilt function can be used with different scenarios, for example:

- a) Trigger when phone is in a front pants pocket and the user goes from sitting to standing or standing to sitting;
- b) Doesn't trigger when phone is in a front pants pocket and the user is walking, running or going upstairs.

3 Pin description

Figure 1. Pin connections

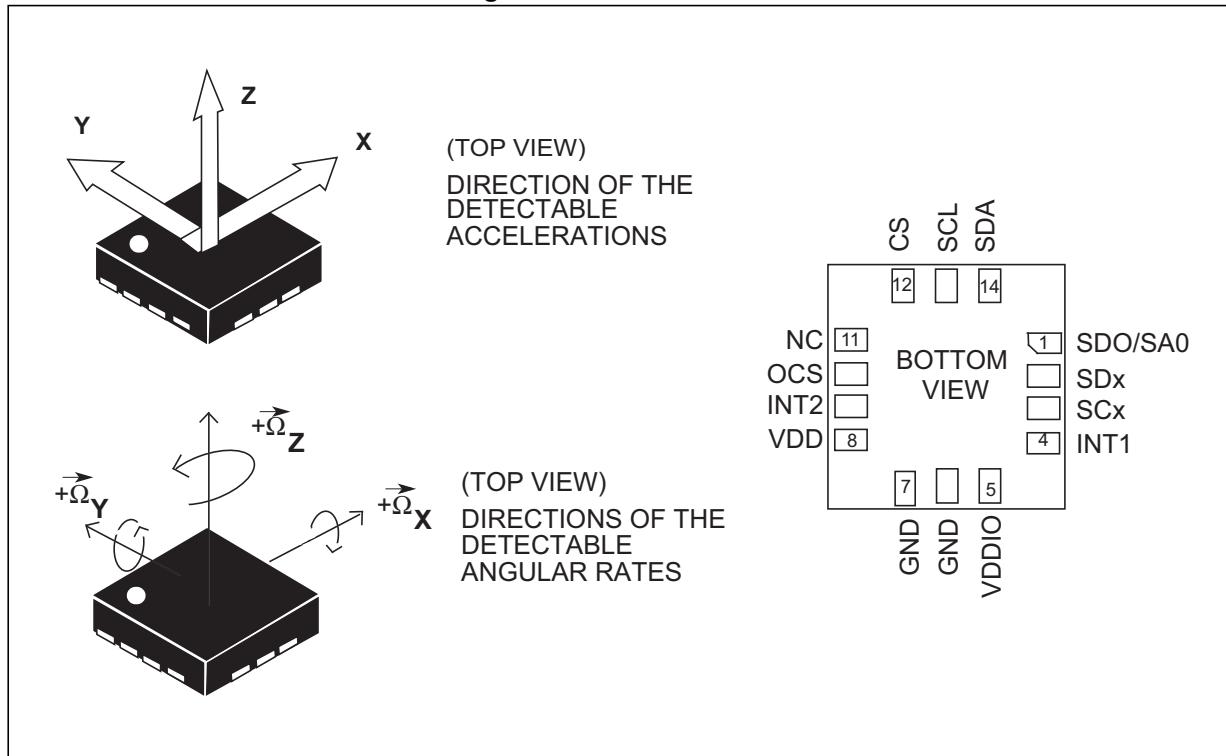

LSM6DS3 offers the flexibility to connect the pins in order to have three different mode connections and functionalities. In detail:

- **Mode 1:** I²C slave interface or SPI (3- and 4-wire) serial interface is available;
- **Mode 2:** I²C slave interface or SPI (3- and 4-wire) serial interface and I²C interface master for external sensors connections are available;
- **Mode 3:** I²C slave interface and auxiliary SPI (3-wire) serial interface for external sensor connection (i.e. EIS application) are available.

In the following table each mode is described for the pin connection and function.

Table 2. Pin description

| Pin# | Name | Mode 1 function | Mode 2 function | Mode 3 function |
|------|----------------------|--|--|---|
| 1 | SDO/SA0 | SPI 4-wire interface serial data output (SDO) I ² C least significant bit of the device address (SA0) | SPI 4-wire interface serial data output (SDO) I ² C least significant bit of the device address (SA0) | I ² C least significant bit of the device address (SA0) |
| 2 | SDx | Connect to VDDIO or GND | I ² C serial data master (MSDA) | Auxiliary SPI 3-wire interface serial data input (SDI) and serial data output (SDO) |
| 3 | SCx | Connect to VDDIO or GND | I ² C serial clock master (MSCL) | Auxiliary SPI 3-wire interface serial port clock (SPC) |
| 4 | INT1 | Programmable interrupt 1 | | |
| 5 | VDDIO ⁽¹⁾ | Power supply for I/O pins | | |
| 6 | GND | 0 V supply | | |
| 7 | GND | 0 V supply | | |
| 8 | VDD ⁽²⁾ | Power supply | | |
| 9 | INT2 | Programmable interrupt 2 (INT2)/ Data enable (DEN) | Programmable interrupt 2 (INT2)/ Data enable (DEN)/ I ² C master external synchronization signal (MDRDY) | Programmable interrupt 2 (INT2)/ Data enable (DEN) |
| 10 | OCS | Leave unconnected | Leave unconnected | Auxiliary SPI 3-wire interface enable |
| 11 | NC | Leave unconnected | | |
| 12 | CS | I ² C/SPI mode selection (1: SPI idle mode / I ² C communication enabled; 0: SPI communication mode / I ² C disabled) | I ² C/SPI mode selection (1: SPI idle mode / I ² C communication enabled; 0: SPI communication mode / I ² C disabled) | Leave unconnected |
| 13 | SCL | I ² C serial clock (SCL) SPI serial port clock (SPC) | I ² C serial clock (SCL) SPI serial port clock (SPC) | I ² C serial clock (SCL) |
| 14 | SDA | I ² C serial data (SDA) SPI serial data input (SDI) 3-wire interface serial data output (SDO) | I ² C serial data (SDA) SPI serial data input (SDI) 3-wire interface serial data output (SDO) | I ² C serial data (SDA) |

1. Recommended 100 nF filter capacitor.

2. Recommended 100 nF capacitor.

4 Module specifications

4.1 Mechanical characteristics

@ Vdd = 1.8 V, T = 25 °C unless otherwise noted.

Table 3. Mechanical characteristics

| Symbol | Parameter | Test conditions | Min. | Typ. ⁽¹⁾ | Max. | Unit |
|----------|---|------------------------------------|------|---------------------|------|----------|
| LA_FS | Linear acceleration measurement range | | | ±2 | | <i>g</i> |
| | | | | ±4 | | |
| | | | | ±8 | | |
| | | | | ±16 | | |
| G_FS | Angular rate measurement range | | | ±125 | | dps |
| | | | | ±245 | | |
| | | | | ±500 | | |
| | | | | ±1000 | | |
| | | | | ±2000 | | |
| LA_So | Linear acceleration sensitivity | FS = ±2 | | 0.061 | | mg/LSB |
| | | FS = ±4 | | 0.122 | | |
| | | FS = ±8 | | 0.244 | | |
| | | FS = ±16 | | 0.488 | | |
| G_So | Angular rate sensitivity | FS = ±125 | | 4.375 | | mdps/LSB |
| | | FS = ±245 | | 8.75 | | |
| | | FS = ±500 | | 17.50 | | |
| | | FS = ±1000 | | 35 | | |
| | | FS = ±2000 | | 70 | | |
| LA_SoDr | Linear acceleration sensitivity change vs. temperature | from -40° to +85° delta from T=25° | | ±1 | | % |
| G_SoDr | Angular rate sensitivity change vs. temperature | from -40° to +85° delta from T=25° | | ±1.5 | | % |
| LA_TyOff | Linear acceleration typical zero-g level offset accuracy ⁽²⁾ | | | ±40 | | mg |
| G_TyOff | Angular rate typical zero-rate level ⁽³⁾ | | | ±10 | | dps |
| LA_OffDr | Linear acceleration zero-g level change vs. temperature | | | ±0.5 | | mg/°C |
| G_OffDr | Angular rate typical zero-rate level change vs. temperature | | | ±0.05 | | dps/°C |
| Rn | Rate noise density | | | 7 | | mdps/√Hz |
| An | Acceleration noise density | FS= ±2 g ODR = 104 Hz | | 90 | | μg/√Hz |

Table 3. Mechanical characteristics (continued)

| Symbol | Parameter | Test conditions | Min. | Typ. ⁽¹⁾ | Max. | Unit |
|--------|--------------------------------------|-----------------|------|--|------|------|
| LA_ODR | Linear acceleration output data rate | | | 13 26 52 104 208 416 833 1666 3332 6664 | | Hz |
| G_ODR | Angular rate output data rate | | | 13 26 52 104 208 416 833 1666 | | |
| Top | Operating temperature range | | -40 | | +85 | °C |

1. Typical specifications are not guaranteed.

2. Values after soldering.

3. Values after soldering.

4.2 Electrical characteristics

@ Vdd = 1.8 V, T = 25 °C unless otherwise noted.

Table 4. Electrical characteristics

| Symbol | Parameter | Test conditions | Min. | Typ. ⁽¹⁾ | Max. | Unit |
|----------|--|---------------------|------|---------------------|-----------|------|
| Vdd | Supply voltage | | 1.71 | 1.8 | 3.6 | V |
| Vdd_IO | Power supply for I/O | | 1.62 | | Vdd + 0.1 | V |
| IddHP | Gyroscope and accelerometer in high-performance mode | up to ODR = 1.6 kHz | | 1.25 | | mA |
| IddNM | Gyroscope and accelerometer in normal mode | ODR = 208 Hz | | 0.9 | | mA |
| IddLP | Gyroscope and accelerometer in low-power mode | ODR = 13 Hz | | 0.42 | | mA |
| LA_IddHP | Accelerometer current consumption in high-performance mode | up to ODR = 1.6 kHz | | 240 | | µA |
| LA_IddNM | Accelerometer current consumption in normal mode | ODR = 104 Hz | | 70 | | µA |
| LA_IddLM | Accelerometer current consumption in low-power mode | ODR = 13 Hz | | 24 | | µA |
| IddPD | Gyroscope and accelerometer in power down | | | 6 | | µA |
| Top | Operating temperature range | | -40 | | +85 | °C |

1. Typical specifications are not guaranteed.

For details related to the LSM6DS3 operating modes, refer to [5.2: Gyroscope power modes](#) and [5.3: Accelerometer power modes](#).

4.3 Temperature sensor characteristics

@ Vdd = 1.8 V, T = 25 °C unless otherwise noted.

Table 5. Temperature sensor characteristics

| Symbol | Parameter | Test condition | Min. | Typ. ⁽¹⁾ | Max. | Unit |
|-----------|---|----------------|------|---------------------|------|--------|
| TODR | Temperature refresh rate | | | 52 | | Hz |
| Toff | Temperature offset ⁽²⁾ | | -15 | | +15 | °C |
| TSen | Temperature sensitivity | | | 16 | | LSB/°C |
| TST | Temperature stabilization time ⁽³⁾ | | | | 500 | μs |
| T_ADC_res | Temperature ADC resolution | | | 12 | | bit |
| Top | Operating temperature range | | -40 | | +85 | °C |

1. Typical specifications are not guaranteed.
2. The output of the temperature sensor is 0 LSB (typ.) at 25 °C.
3. Time from power ON bit to valid data based on characterization data.

4.4 Communication interface characteristics

4.4.1 SPI - serial peripheral interface


Subject to general operating conditions for Vdd and Top.

Table 6. SPI slave timing values

| Symbol | Parameter | Value ⁽¹⁾ | | Unit |
|----------------------|-------------------------|----------------------|-----|------|
| | | Min | Max | |
| $t_{c(\text{SPC})}$ | SPI clock cycle | 100 | | ns |
| $f_{c(\text{SPC})}$ | SPI clock frequency | | 10 | MHz |
| $t_{su(\text{CS})}$ | CS setup time | 5 | | ns |
| $t_{h(\text{CS})}$ | CS hold time | 20 | | |
| $t_{su(\text{SI})}$ | SDI input setup time | 5 | | |
| $t_{h(\text{SI})}$ | SDI input hold time | 15 | | |
| $t_{v(\text{SO})}$ | SDO valid output time | | 50 | |
| $t_{h(\text{SO})}$ | SDO output hold time | 5 | | |
| $t_{dis(\text{SO})}$ | SDO output disable time | | 50 | |

1. Values are guaranteed at 10 MHz clock frequency for SPI with both 4 and 3 wires, based on characterization results, not tested in production

Figure 2. SPI slave timing diagram

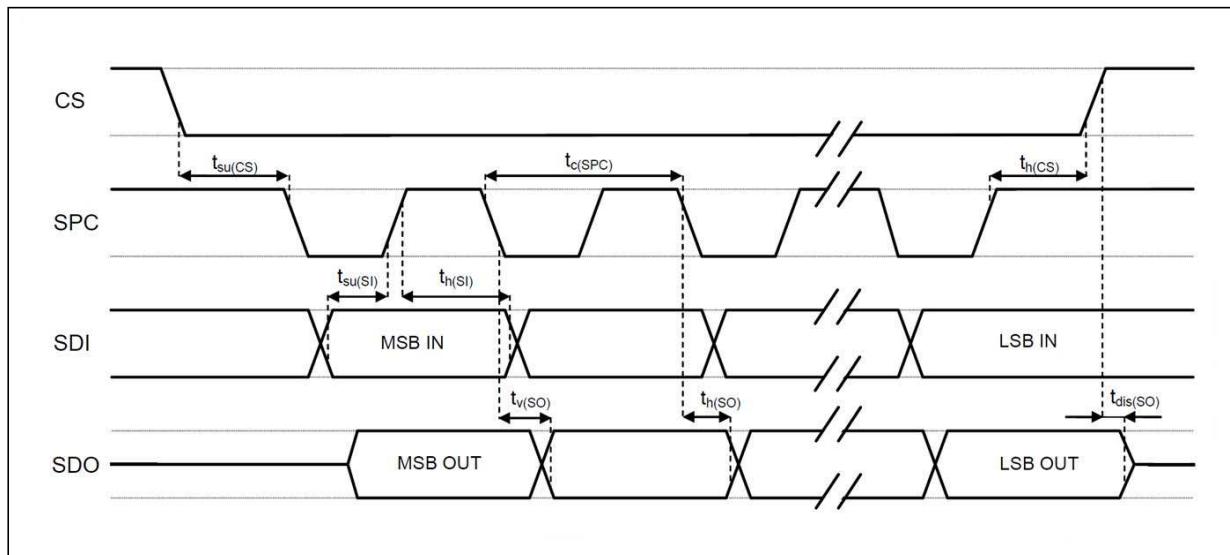

Note: Measurement points are done at $0.2 \cdot V_{dd_IO}$ and $0.8 \cdot V_{dd_IO}$, for both input and output ports.

4.4.2 I²C - inter-IC control interface


Subject to general operating conditions for Vdd and Top.

Table 7. I²C slave timing values

| Symbol | Parameter | I ² C Standard mode ⁽¹⁾ | | I ² C Fast mode ⁽¹⁾ | | Unit |
|---------------|--|---|------|---|-----|---------|
| | | Min | Max | Min | Max | |
| $f_{(SCL)}$ | SCL clock frequency | 0 | 100 | 0 | 400 | kHz |
| $t_w(SCLL)$ | SCL clock low time | 4.7 | | 1.3 | | μs |
| $t_w(SCLH)$ | SCL clock high time | 4.0 | | 0.6 | | |
| $t_{su}(SDA)$ | SDA setup time | 250 | | 100 | | |
| $t_h(SDA)$ | SDA data hold time | 0 | 3.45 | 0 | 0.9 | |
| $t_h(ST)$ | START condition hold time | 4 | | 0.6 | | |
| $t_{su}(SR)$ | Repeated START condition setup time | 4.7 | | 0.6 | | |
| $t_{su}(SP)$ | STOP condition setup time | 4 | | 0.6 | | |
| $t_w(SP:SR)$ | Bus free time between STOP and START condition | 4.7 | | 1.3 | | |

1. Data based on standard I²C protocol requirement, not tested in production.

Figure 3. I²C slave timing diagram

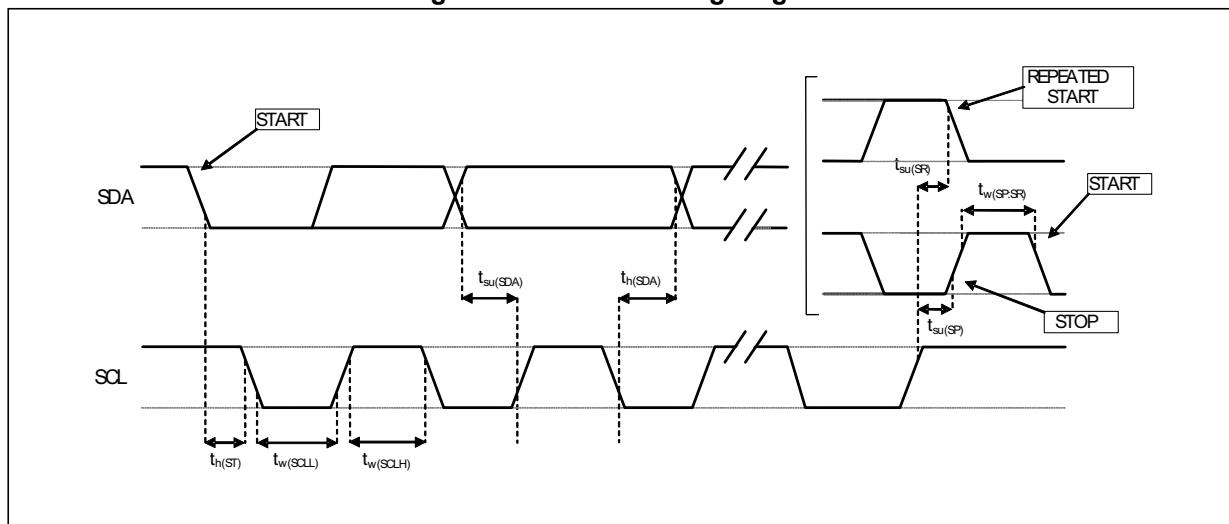

Note: Measurement points are done at $0.2 \cdot Vdd_IO$ and $0.8 \cdot Vdd_IO$, for both ports.

4.5 Absolute maximum ratings

Stresses above those listed as “Absolute maximum ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device under these conditions is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

Table 8. Absolute maximum ratings

| Symbol | Ratings | Maximum value | Unit |
|------------------|---|--------------------------------|----------|
| Vdd | Supply voltage | -0.3 to 4.8 | V |
| T _{STG} | Storage temperature range | -40 to +125 | °C |
| Sg | Acceleration <i>g</i> for 0.1 ms | 10,000 | <i>g</i> |
| ESD | Electrostatic discharge protection (HBM) | 2 | kV |
| V _{in} | Input voltage on any control pin (including CS, SCL/SPC, SDA/SDI/SDO, SDO/SA0) | 0.3 to V _{dd_IO} +0.3 | V |

Note: Supply voltage on any pin should never exceed 4.8 V.



This device is sensitive to mechanical shock, improper handling can cause permanent damage to the part.



This device is sensitive to electrostatic discharge (ESD), improper handling can cause permanent damage to the part.

4.6 Terminology

4.6.1 Sensitivity

Linear acceleration sensitivity can be determined, for example, by applying 1 g acceleration to the device. Because the sensor can measure DC accelerations, this can be done easily by pointing the selected axis towards the ground, noting the output value, rotating the sensor 180 degrees (pointing towards the sky) and noting the output value again. By doing so, $\pm 1\text{ g}$ acceleration is applied to the sensor. Subtracting the larger output value from the smaller one, and dividing the result by 2, leads to the actual sensitivity of the sensor. This value changes very little over temperature and over time. The sensitivity tolerance describes the range of sensitivities of a large number of sensors.

An angular rate gyroscope is device that produces a positive-going digital output for counterclockwise rotation around the axis considered. Sensitivity describes the gain of the sensor and can be determined by applying a defined angular velocity to it. This value changes very little over temperature and time.

4.6.2 Zero-g and zero-rate level

Linear acceleration zero-g level offset (TyOff) describes the deviation of an actual output signal from the ideal output signal if no acceleration is present. A sensor in a steady state on a horizontal surface will measure 0 g on both the X-axis and Y-axis, whereas the Z-axis will measure 1 g. Ideally, the output is in the middle of the dynamic range of the sensor (content of OUT registers 00h, data expressed as 2's complement number). A deviation from the ideal value in this case is called zero-g offset.

Offset is to some extent a result of stress to MEMS sensor and therefore the offset can slightly change after mounting the sensor onto a printed circuit board or exposing it to extensive mechanical stress. Offset changes little over temperature, see “Linear acceleration zero-g level change vs. temperature” in [Table 3](#). The zero-g level tolerance (TyOff) describes the standard deviation of the range of zero-g levels of a group of sensors.

Zero-rate level describes the actual output signal if there is no angular rate present. The zero-rate level of precise MEMS sensors is, to some extent, a result of stress to the sensor and therefore the zero-rate level can slightly change after mounting the sensor onto a printed circuit board or after exposing it to extensive mechanical stress. This value changes very little over temperature and time.

5 Functionality

5.1 Operating modes

The LSM6DS3 has three operating modes available:

- only accelerometer active and gyroscope in power-down
- only gyroscope active and accelerometer in power-down
- both accelerometer and gyroscope sensors active with independent ODR

The accelerometer is activated from power down by writing ODR_XL[3:0] in [CTRL1_XL \(10h\)](#) while the gyroscope is activated from power-down by writing ODR_G[3:0] in [CTRL2_G \(11h\)](#). For combo mode the ODRs are totally independent.

5.2 Gyroscope power modes

In the LSM6DS3, the gyroscope can be configured in four different operating modes: power-down, low-power, normal mode and high-performance mode. The operating mode selected depends on the value of the G_HM_MODE bit in [CTRL7_G \(16h\)](#). If G_HM_MODE is set to '0', high-performance mode is valid for all ODRs (from 13 Hz up to 1.6 kHz).

To enable the low-power and normal mode, the G_HM_MODE bit has to be set to '1'. Low-power mode is available for lower ODR (13, 26, 52 Hz) while normal mode is available for ODRs equal to 104 and 208 Hz.

5.3 Accelerometer power modes

In the LSM6DS3, the accelerometer can be configured in four different operating modes: power-down, low-power, normal mode and high-performance mode. The operating mode selected depends on the value of the XL_HM_MODE bit in [CTRL6_C \(15h\)](#). If XL_HM_MODE is set to '0', high-performance mode is valid for all ODRs (from 13 Hz up to 6.66 kHz).

To enable the low-power and normal mode, the XL_HM_MODE bit has to be set to '1'. Low-power mode is available for lower ODRs (13, 26, 52 Hz) while normal mode is available for ODRs equal to 104 and 208 Hz.

5.4 FIFO

The presence of a FIFO allows consistent power saving for the system since the host processor does not need continuously poll data from the sensor, but it can wake up only when needed and burst the significant data out from the FIFO.

LSM6DS3 embeds 8 kbytes data FIFO to store the following data:

- gyroscope
- accelerometer
- external sensors
- step counter and time stamp
- temperature

Writing data in the FIFO can be configured to be triggered by the:

- accelerometer/gyroscope data-ready signal; in which case the ODR must be lower than or equal to both the accelerometer and gyroscope ODRs;
- sensor hub data-ready signal;
- step detection signal.

In addition, each data can be stored at a decimated data rate compared to FIFO ODR and it is configurable by the user, setting the registers [FIFO_CTRL3 \(08h\)](#) and [FIFO_CTRL4 \(09h\)](#). The available decimation factors are 2, 3, 4, 8, 16, 32.

Programmable FIFO threshold can be set in [FIFO_CTRL1 \(06h\)](#) and [FIFO_CTRL2 \(07h\)](#) using the FTH [11:0] bits.

To monitor the FIFO status, dedicated registers ([FIFO_STATUS1 \(3Ah\)](#), [FIFO_STATUS2 \(3Bh\)](#), [FIFO_STATUS3 \(3Ch\)](#), [FIFO_STATUS4 \(3Dh\)](#)) can be read to detect FIFO overrun events, FIFO full status, FIFO empty status, FIFO threshold status and the number of unread samples stored in the FIFO. To generate dedicated interrupts on the INT1 and INT2 pads of these status events, the configuration can be set in [INT1_CTRL \(0Dh\)](#) and [INT2_CTRL \(0Eh\)](#).

FIFO buffer can be configured according to five different modes:

- Bypass mode
- FIFO mode
- Continuous mode
- Continuous-to-FIFO mode
- Bypass-to-continuous mode

Each mode is selected by the FIFO_MODE_[2:0] in [FIFO_CTRL5 \(0Ah\)](#) register. To guarantee the correct acquisition of data during the switching into and out of FIFO mode, the first sample acquired must be discarded.

5.4.1 Bypass mode

In Bypass mode ([FIFO_CTRL5 \(0Ah\)](#) (FIFO_MODE_[2:0] = 000), the FIFO is not operational and it remains empty.

Bypass mode is also used to reset the FIFO when in FIFO mode.

5.4.2 FIFO mode

In FIFO mode ([FIFO_CTRL5 \(0Ah\)](#) (FIFO_MODE_[2:0] = 001) data from the output channels are stored in the FIFO until it is full.

To reset FIFO content, Bypass mode should be selected by writing [FIFO_CTRL5 \(0Ah\)](#) (FIFO_MODE_[2:0]) to '000'. After this reset command, it is possible to restart FIFO mode by writing [FIFO_CTRL5 \(0Ah\)](#) (FIFO_MODE_[2:0]) to '001'.

FIFO buffer memorizes up to 4096 samples of 16 bits each but the depth of the FIFO can be resized by setting the FTH [11:0] bits in [FIFO_CTRL1 \(06h\)](#) and [FIFO_CTRL2 \(07h\)](#). If the STOP_ON_FTH bit in [CTRL4_C \(13h\)](#) is set to '1', FIFO depth is limited up to FTH [11:0] bits in [FIFO_CTRL1 \(06h\)](#) and [FIFO_CTRL2 \(07h\)](#).

5.4.3 Continuous mode

Continuous mode ([FIFO_CTRL5 \(0Ah\)](#)) (FIFO_MODE_[2:0] = 110) provides a continuous FIFO update: as new data arrives, the older data is discarded.

A FIFO threshold flag [FIFO_STATUS2 \(3Bh\)](#)(FTH) is asserted when the number of unread samples in FIFO is greater than or equal to [FIFO_CTRL1 \(06h\)](#) and [FIFO_CTRL2 \(07h\)](#)(FTH [11:0]).

It is possible to route [FIFO_STATUS2 \(3Bh\)](#) (FTH) to the INT1 pin by writing in register [INT1_CTRL \(0Dh\)](#) (INT1_FTH) = '1' or to the INT2 pin by writing in register [INT2_CTRL \(0Eh\)](#) (INT2_FTH) = '1'.

A full-flag interrupt can be enabled, [INT1_CTRL \(0Dh\)](#) (INT_FULL_FLAG) = '1', in order to indicate FIFO saturation and eventually read its content all at once.

If an overrun occurs, at least one of the oldest samples in FIFO has been overwritten and the OVER_RUN flag in [FIFO_STATUS2 \(3Bh\)](#) is asserted.

In order to empty the FIFO before it is full, it is also possible to pull from FIFO the number of unread samples available in [FIFO_STATUS1 \(3Ah\)](#) and [FIFO_STATUS2 \(3Bh\)](#) (DIFF_FIFO[11:0]).

5.4.4 Continuous-to-FIFO mode

In Continuous-to-FIFO mode ([FIFO_CTRL5 \(0Ah\)](#)) (FIFO_MODE_[2:0] = 011), FIFO behavior changes according to the trigger event detected in one of the following interrupt registers [FUNC_SRC \(53h\)](#), [TAP_SRC \(1Ch\)](#), [WAKE_UP_SRC \(1Bh\)](#) and [D6D_SRC \(1Dh\)](#).

When the selected trigger bit is equal to '1', FIFO operates in FIFO mode.

When the selected trigger bit is equal to '0', FIFO operates in Continuous mode.

5.4.5 Bypass-to-Continuous mode

In Bypass-to-Continuous mode ([FIFO_CTRL5 \(0Ah\)](#)) (FIFO_MODE_[2:0] = '100'), data measurement storage inside FIFO operates in Continuous mode when selected triggers in one of the following interrupt registers [FUNC_SRC \(53h\)](#), [TAP_SRC \(1Ch\)](#), [WAKE_UP_SRC \(1Bh\)](#) and [D6D_SRC \(1Dh\)](#) are equal to '1', otherwise FIFO content is reset (Bypass mode).

5.4.6 FIFO reading procedure

The data stored in FIFO are accessible from dedicated registers ([FIFO_DATA_OUT_L \(3Eh\)](#) and [FIFO_DATA_OUT_H \(3Fh\)](#)) and each FIFO sample is composed of 16 bits.

All FIFO status registers ([FIFO_STATUS1 \(3Ah\)](#), [FIFO_STATUS2 \(3Bh\)](#), [FIFO_STATUS3 \(3Ch\)](#), [FIFO_STATUS4 \(3Dh\)](#)) can be read at the start of a reading operation, minimizing the intervention of the application processor.

Saving data in the FIFO buffer is organized in four FIFO data sets consisting of 6 bytes each:

The 1st FIFO data set is reserved for gyroscope data;

The 2nd FIFO data set is reserved for accelerometer data;

The 3rd FIFO data set is reserved for the external sensor data stored in the registers from *SENSORHUB1_REG (2Eh)* to *SENSORHUB6_REG (33h)*;

The 4th FIFO data set can be alternately associated to the external sensor data stored in the registers from *SENSORHUB7_REG (34h)* to *SENSORHUB12_REG(39h)*, to the step counter and time stamp info, or to the temperature sensor data.

5.4.7 Filter block diagrams

Figure 4. Accelerometer chain

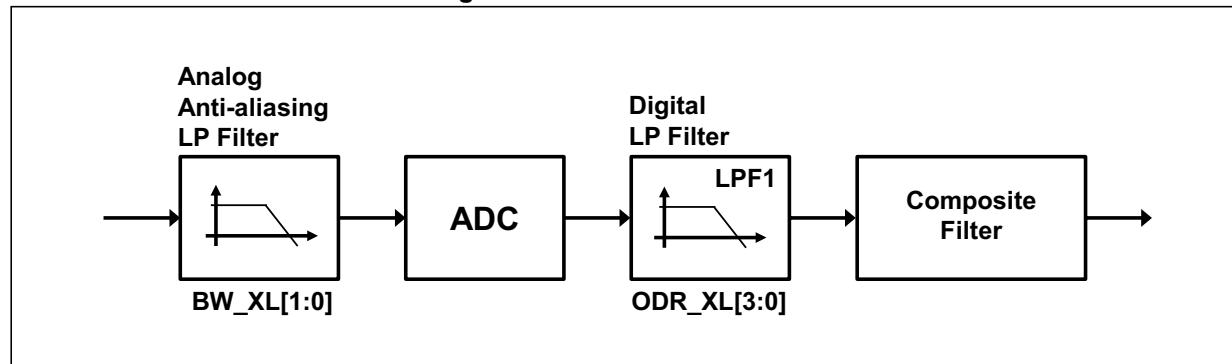


Figure 5. Accelerometer composite filter

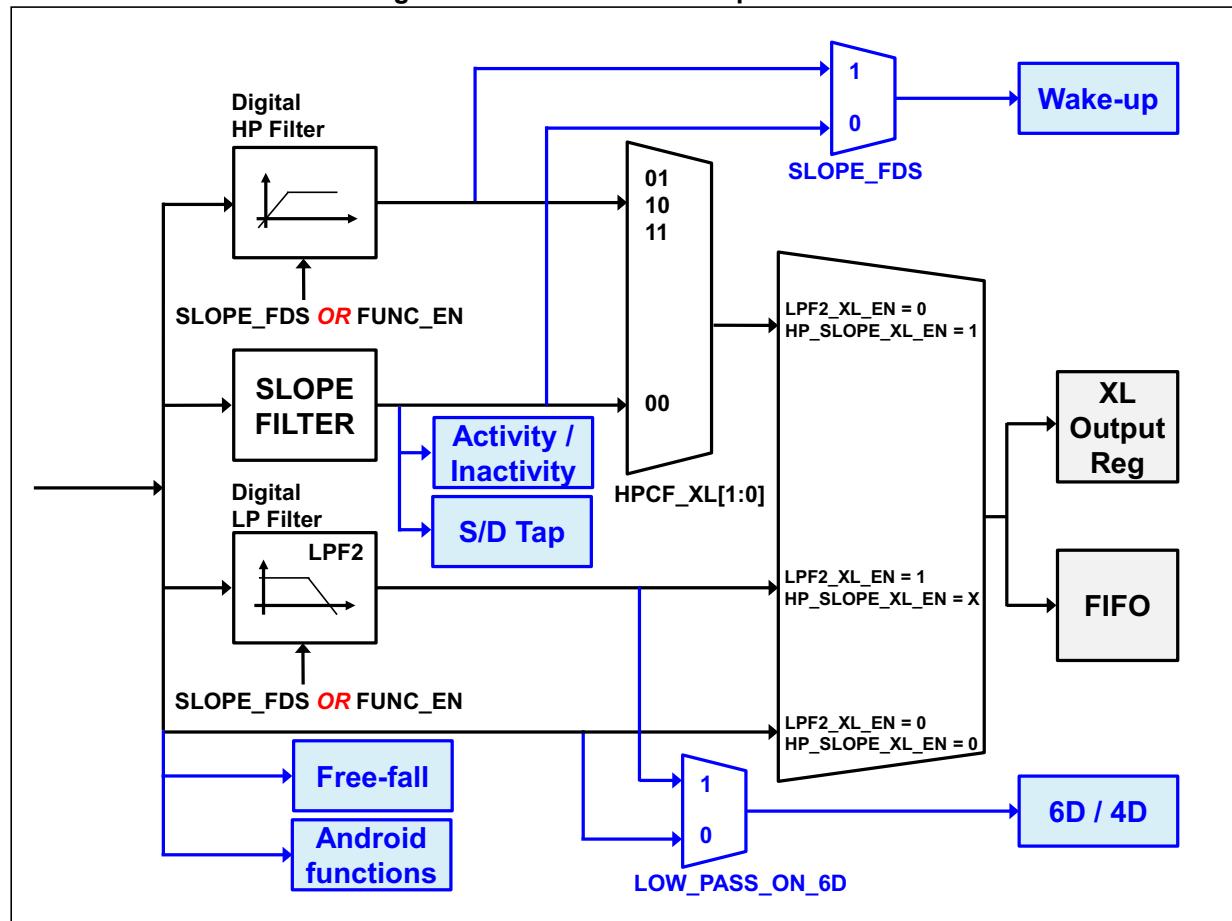
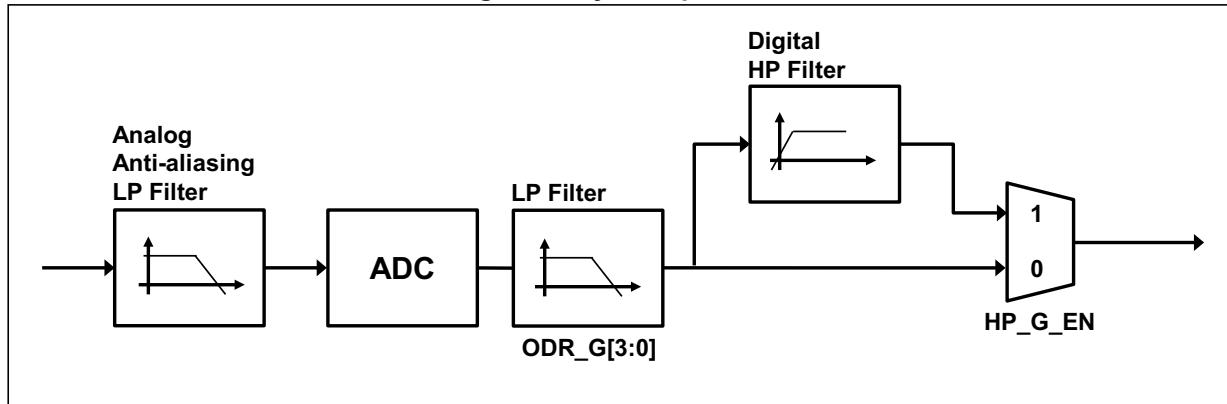


Figure 6. Gyroscope chain

6 Digital interfaces

The registers embedded inside the LSM6DS3 may be accessed through both the I²C and SPI serial interfaces. The latter may be SW configured to operate either in 3-wire or 4-wire interface mode.

The serial interfaces are mapped onto the same pins. To select/exploit the I²C interface, the CS line must be tied high (i.e connected to Vdd_IO).

Table 9. Serial interface pin description

| Pin name | Pin description |
|-------------|---|
| CS | SPI enable I ² C/SPI mode selection (1: SPI idle mode / I ² C communication enabled; 0: SPI communication mode / I ² C disabled) |
| SCL/SPC | I ² C Serial Clock (SCL) SPI Serial Port Clock (SPC) |
| SDA/SDI/SDO | I ² C Serial Data (SDA) SPI Serial Data Input (SDI) 3-wire Interface Serial Data Output (SDO) |
| SDO/SA0 | SPI Serial Data Output (SDO) I ² C less significant bit of the device address |

6.1 I²C serial interface

The LSM6DS3 I²C is a bus slave. The I²C is employed to write the data to the registers, whose content can also be read back.

The relevant I²C terminology is provided in the table below.

Table 10. I²C terminology

| Term | Description |
|-------------|--|
| Transmitter | The device which sends data to the bus |
| Receiver | The device which receives data from the bus |
| Master | The device which initiates a transfer, generates clock signals and terminates a transfer |
| Slave | The device addressed by the master |

There are two signals associated with the I²C bus: the serial clock line (SCL) and the Serial DAta line (SDA). The latter is a bidirectional line used for sending and receiving the data to/from the interface. Both the lines must be connected to Vdd_IO through external pull-up resistors. When the bus is free, both the lines are high.

The I²C interface is implemented with fast mode (400 kHz) I²C standards as well as with the standard mode.

In order to disable the I²C block, (I2C_disable) = 1 must be written in [CTRL4_C \(13h\)](#).

6.1.1 I²C operation

The transaction on the bus is started through a START (ST) signal. A START condition is defined as a HIGH to LOW transition on the data line while the SCL line is held HIGH. After this has been transmitted by the master, the bus is considered busy. The next byte of data transmitted after the start condition contains the address of the slave in the first 7 bits and the eighth bit tells whether the master is receiving data from the slave or transmitting data to the slave. When an address is sent, each device in the system compares the first seven bits after a start condition with its address. If they match, the device considers itself addressed by the master.

The Slave ADdress (SAD) associated to the LSM6DS3 is 110101xb. The SDO/SA0 pin can be used to modify the less significant bit of the device address. If the SDO/SA0 pin is connected to the supply voltage, LSb is '1' (address 1101011b); else if the SDO/SA0 pin is connected to ground, the LSb value is '0' (address 1101010b). This solution permits to connect and address two different inertial modules to the same I²C bus.

Data transfer with acknowledge is mandatory. The transmitter must release the SDA line during the acknowledge pulse. The receiver must then pull the data line LOW so that it remains stable low during the HIGH period of the acknowledge clock pulse. A receiver which has been addressed is obliged to generate an acknowledge after each byte of data received.

The I²C embedded inside the LSM6DS3 behaves like a slave device and the following protocol must be adhered to. After the start condition (ST) a slave address is sent, once a slave acknowledge (SAK) has been returned, an 8-bit sub-address (SUB) is transmitted. The increment of the address is configured by the [CTRL3_C \(12h\)](#) (IF_INC).

The slave address is completed with a Read/Write bit. If the bit is '1' (Read), a repeated START (SR) condition must be issued after the two sub-address bytes; if the bit is '0' (Write) the master will transmit to the slave with direction unchanged. [Table 11](#) explains how the SAD+Read/Write bit pattern is composed, listing all the possible configurations.

Table 11. SAD+Read/Write patterns

| Command | SAD[6:1] | SAD[0] = SA0 | R/W | SAD+R/W |
|---------|----------|--------------|-----|----------------|
| Read | 110101 | 0 | 1 | 11010101 (D5h) |
| Write | 110101 | 0 | 0 | 11010100 (D4h) |
| Read | 110101 | 1 | 1 | 11010111 (D7h) |
| Write | 110101 | 1 | 0 | 11010110 (D6h) |

Table 12. Transfer when master is writing one byte to slave

| Master | ST | SAD + W | | SUB | | DATA | | SP |
|--------|----|---------|-----|-----|-----|------|-----|----|
| Slave | | | SAK | | SAK | | SAK | |

Table 13. Transfer when master is writing multiple bytes to slave

| Master | ST | SAD + W | | SUB | | DATA | | DATA | | SP |
|--------|----|---------|-----|-----|-----|------|-----|------|-----|----|
| Slave | | | SAK | | SAK | | SAK | | SAK | |

Table 14. Transfer when master is receiving (reading) one byte of data from slave

| Master | ST | SAD + W | SUB | SR | SAD + R | NMAK | SP |
|--------|----|---------|-----|-----|---------|------|------|
| Slave | | | SAK | SAK | | SAK | DATA |

Table 15. Transfer when master is receiving (reading) multiple bytes of data from slave

| Master | ST | SAD+W | SUB | SR | SAD+R | MAK | MAK | NMAK | SP |
|--------|----|-------|-----|-----|-------|-----|------|-------|------|
| Slave | | | SAK | SAK | | SAK | DATA | DAT A | DATA |


Data are transmitted in byte format (DATA). Each data transfer contains 8 bits. The number of bytes transferred per transfer is unlimited. Data is transferred with the Most Significant bit (MSb) first. If a receiver can't receive another complete byte of data until it has performed some other function, it can hold the clock line, SCL LOW to force the transmitter into a wait state. Data transfer only continues when the receiver is ready for another byte and releases the data line. If a slave receiver doesn't acknowledge the slave address (i.e. it is not able to receive because it is performing some real-time function) the data line must be left HIGH by the slave. The master can then abort the transfer. A LOW to HIGH transition on the SDA line while the SCL line is HIGH is defined as a STOP condition. Each data transfer must be terminated by the generation of a STOP (SP) condition.

In the presented communication format MAK is Master acknowledge and NMAK is No Master Acknowledge.

6.2 SPI bus interface

The LSM6DS3 SPI is a bus slave. The SPI allows writing and reading the registers of the device.

The serial interface communicates to the application using 4 wires: **CS**, **SPC**, **SDI** and **SDO**.

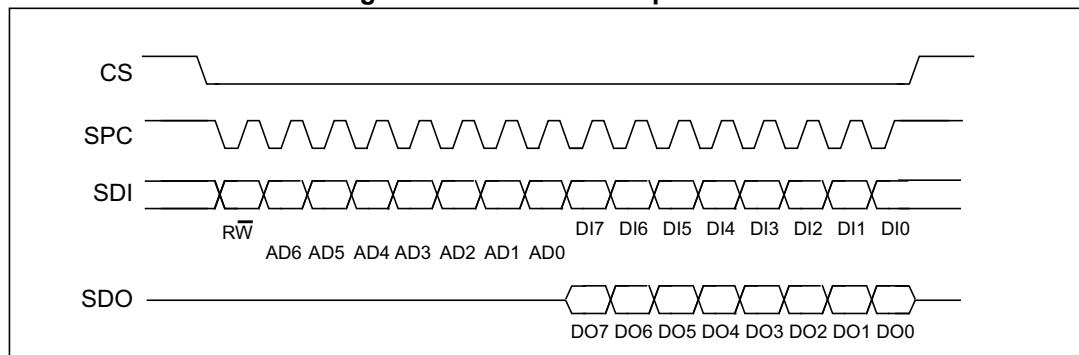Figure 7. Read and write protocol

CS is the serial port enable and it is controlled by the SPI master. It goes low at the start of the transmission and goes back high at the end. **SPC** is the serial port clock and it is controlled by the SPI master. It is stopped high when **CS** is high (no transmission). **SDI** and **SDO** are, respectively, the serial port data input and output. Those lines are driven at the falling edge of **SPC** and should be captured at the rising edge of **SPC**.

Both the read register and write register commands are completed in 16 clock pulses or in multiples of 8 in case of multiple read/write bytes. Bit duration is the time between two falling edges of **SPC**. The first bit (bit 0) starts at the first falling edge of **SPC** after the falling edge of **CS** while the last bit (bit 15, bit 23, ...) starts at the last falling edge of **SPC** just before the rising edge of **CS**.

bit 0: **RW** bit. When 0, the data **DI(7:0)** is written into the device. When 1, the data **DO(7:0)** from the device is read. In latter case, the chip will drive **SDO** at the start of bit 8.

bit 1-7: address **AD(6:0)**. This is the address field of the indexed register.

bit 8-15: data **DI(7:0)** (write mode). This is the data that is written into the device (MSb first).


bit 8-15: data **DO(7:0)** (read mode). This is the data that is read from the device (MSb first).

In multiple read/write commands further blocks of 8 clock periods will be added. When the [**CTRL3_C \(12h\)**](#) (IF_INC) bit is '0', the address used to read/write data remains the same for every block. When the [**CTRL3_C \(12h\)**](#) (IF_INC) bit is '1', the address used to read/write data is increased at every block.

The function and the behavior of **SDI** and **SDO** remain unchanged.

6.2.1 SPI read

Figure 8. SPI read protocol

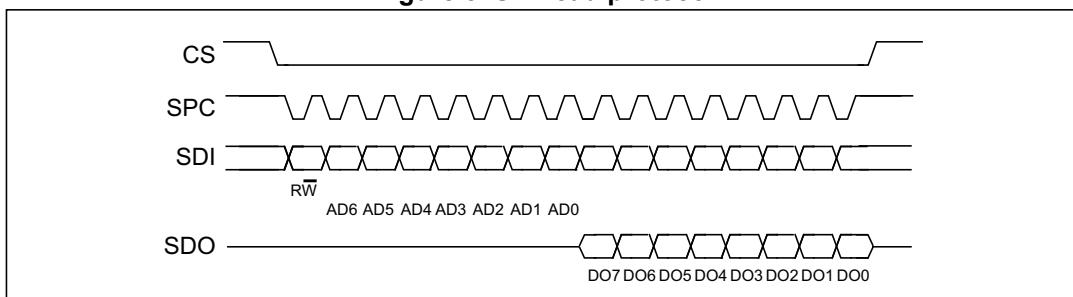


The SPI Read command is performed with 16 clock pulses. A multiple byte read command is performed by adding blocks of 8 clock pulses to the previous one.

bit 0: READ bit. The value is 1.


bit 1-7: address **AD(6:0)**. This is the address field of the indexed register.

bit 8-15: data **DO(7:0)** (read mode). This is the data that will be read from the device (MSb first).

bit 16-...: data **DO(...-8)**. Further data in multiple byte reads.

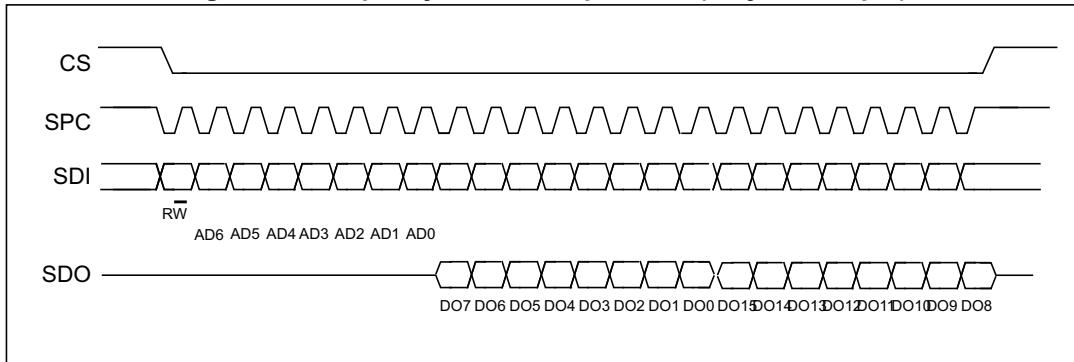Figure 9. Multiple byte SPI read protocol (2-byte example)

6.2.2 SPI write

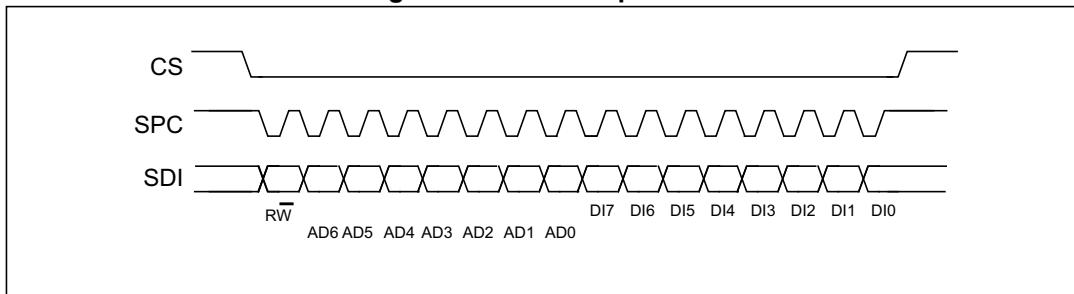Figure 10. SPI write protocol


The SPI Write command is performed with 16 clock pulses. A multiple byte write command is performed by adding blocks of 8 clock pulses to the previous one.

bit 0: WRITE bit. The value is 0.

bit 1 -7: address AD(6:0). This is the address field of the indexed register.

bit 8-15: data DI(7:0) (write mode). This is the data that is written inside the device (MSb first).


bit 16-... : data DI(...-8). Further data in multiple byte writes.

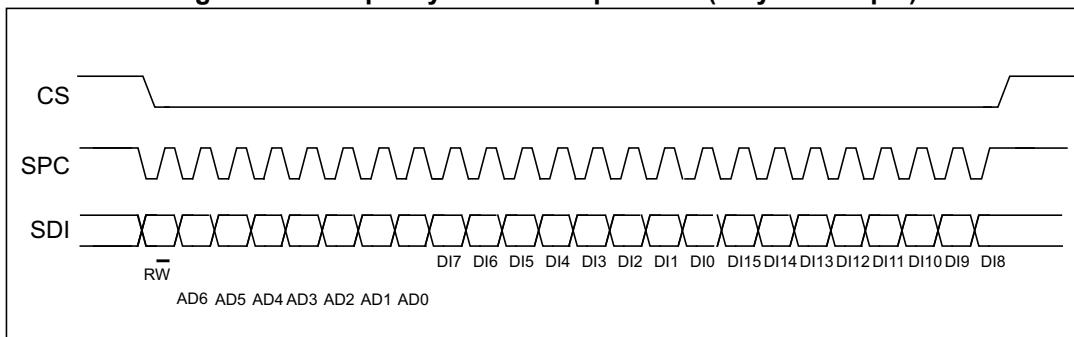Figure 11. Multiple byte SPI write protocol (2-byte example)

6.2.3 SPI read in 3-wire mode

A 3-wire mode is entered by setting the *CTRL3_C (12h)* (SIM) bit equal to '1' (SPI serial interface mode selection).

Figure 12. SPI read protocol in 3-wire mode

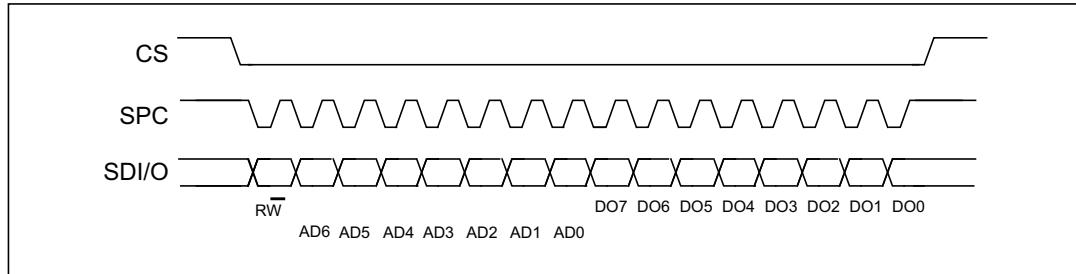

The SPI read command is performed with 16 clock pulses:

bit 0: READ bit. The value is 1.

bit 1-7: address AD(6:0). This is the address field of the indexed register.


bit 8-15: data DO(7:0) (read mode). This is the data that is read from the device (MSb first).

A multiple read command is also available in 3-wire mode.

7 Application hints

7.1 LSM6DS3 electrical connections in Mode 1

Figure 13. LSM6DS3 electrical connections in Mode 1

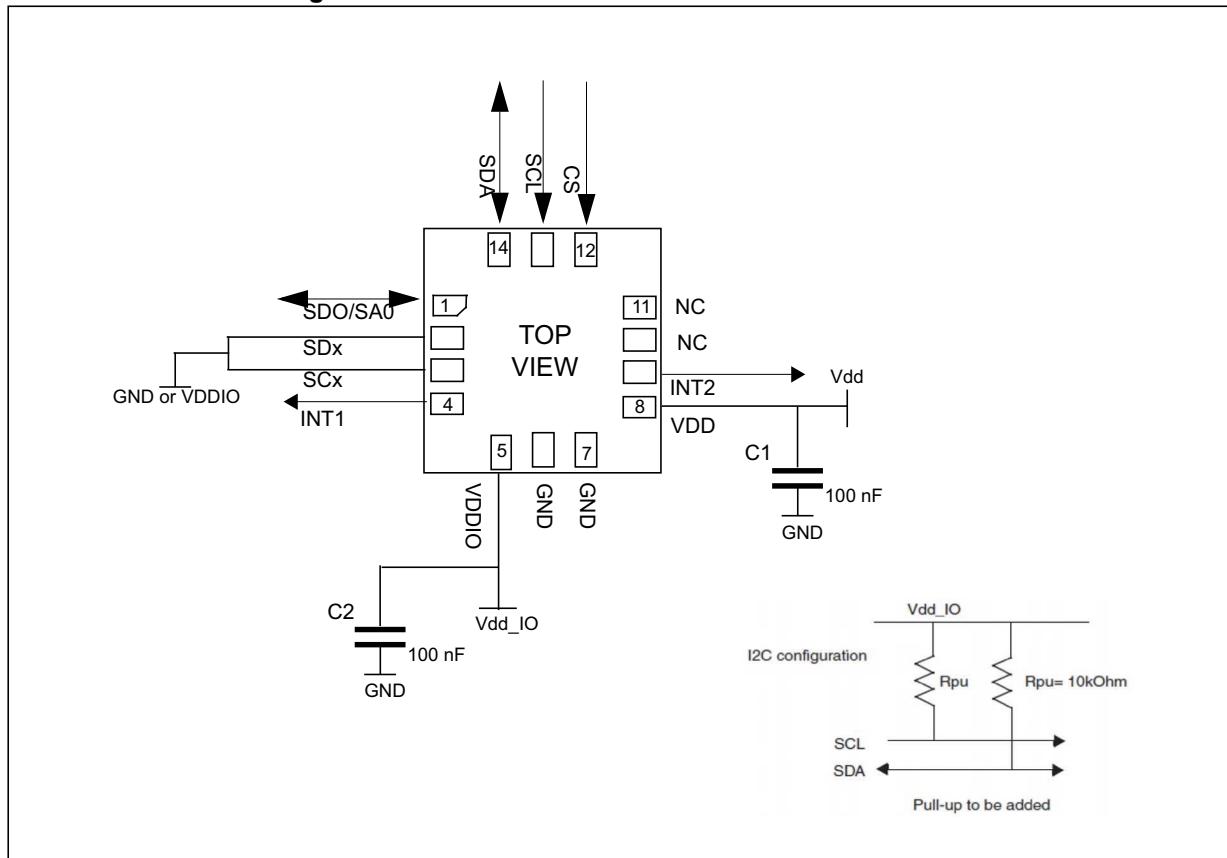


The device core is supplied through the Vdd line. Power supply decoupling capacitors ($C_1, C_2 = 100 \text{ nF}$ ceramic) should be placed as near as possible to the supply pin of the device (common design practice).

The functionality of the device and the measured acceleration/angular rate data is selectable and accessible through the SPI/I²C interface.

The functions, the threshold and the timing of the two interrupt pins for each sensor can be completely programmed by the user through the SPI/I²C interface.

7.2 LSM6DS3 electrical connections in Mode 2

Figure 14. LSM6DS3 electrical connections in Mode 2

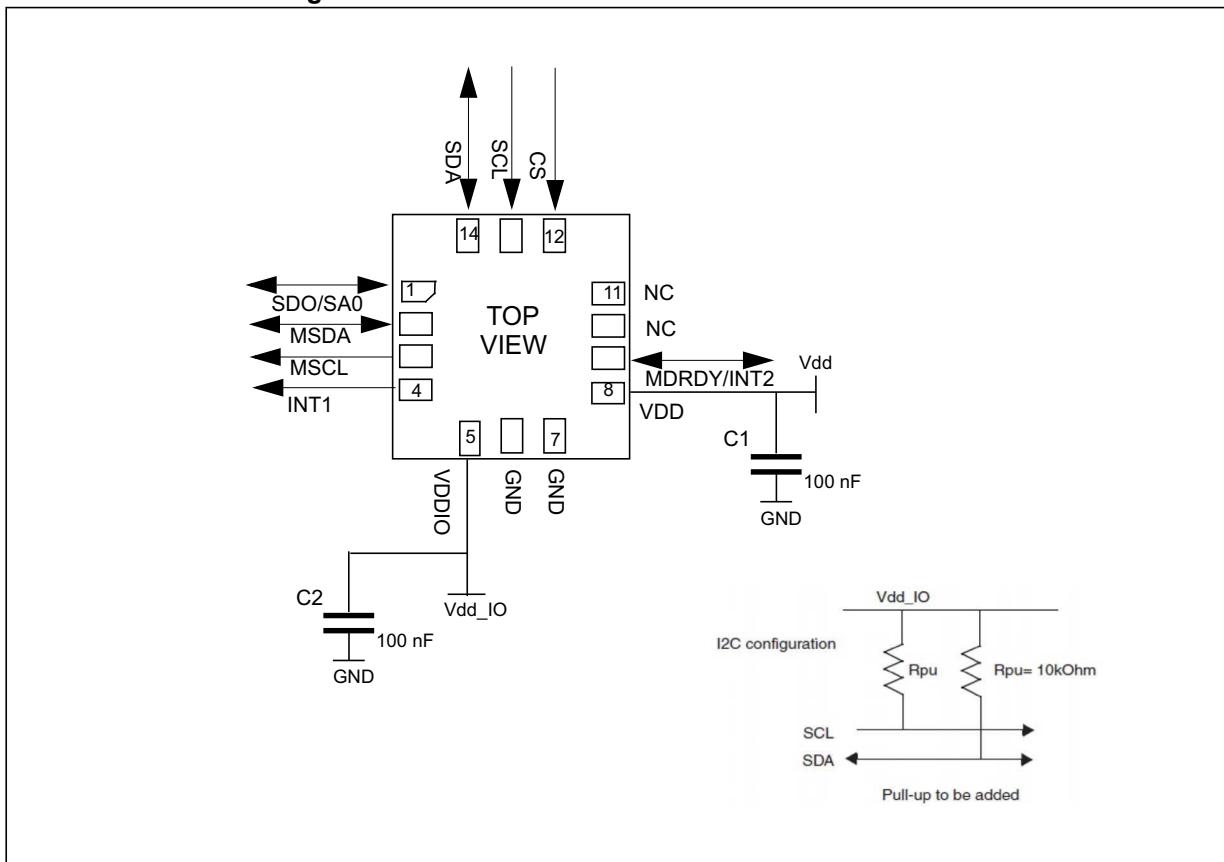


The device core is supplied through the Vdd line. Power supply decoupling capacitors (C_1 , $C_2 = 100 \text{ nF}$ ceramic) should be placed as near as possible to the supply pin of the device (common design practice).

The functionality of the device and the measured acceleration/angular rate data is selectable and accessible through the SPI/I²C interface.

The functions, the threshold and the timing of the two interrupt pins for each sensor can be completely programmed by the user through the SPI/I²C interface.

7.3 LSM6DS3 electrical connections in Mode 3

Figure 15. LSM6DS3 electrical connections in Mode 3

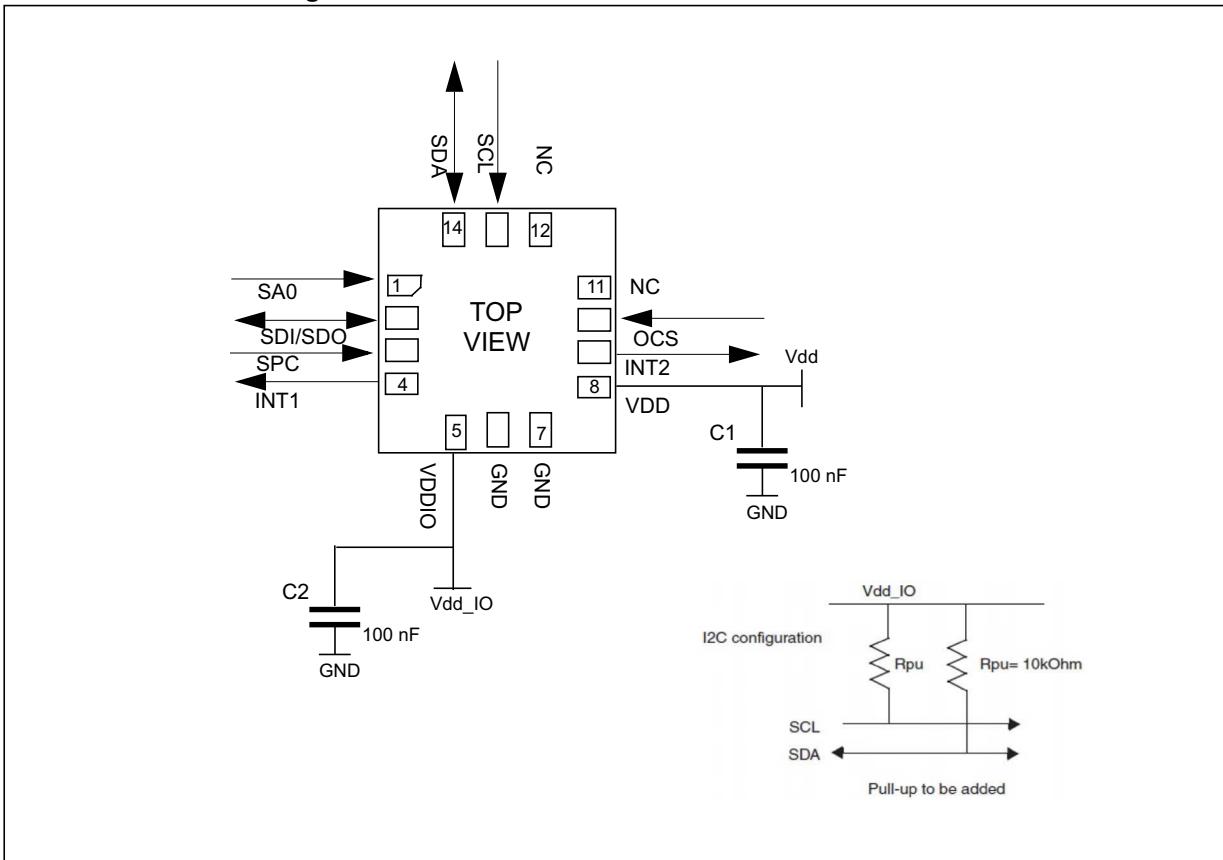

The device core is supplied through the Vdd line. Power supply decoupling capacitors (C_1 , $C_2 = 100 \text{ nF}$ ceramic) should be placed as near as possible to the supply pin of the device (common design practice).

The functionality of the device and the measured acceleration/angular rate data is selectable and accessible through the SPI/I²C interface.

The functions, the threshold and the timing of the two interrupt pins for each sensor can be completely programmed by the user through the SPI/I²C interface.

8 Register mapping

The table given below provides a list of the 8/16 bit registers embedded in the device and the corresponding addresses.

Table 16. Registers address map

| Name | Type | Register address | | Default | Comment |
|------------------------|------|------------------|-----------|----------|---|
| | | Hex | Binary | | |
| RESERVED | r/w | 00 | 00000000 | 00000000 | Reserved |
| FUNC_CFG_ACCESS | r/w | 01 | 00000001 | 00000000 | Embedded functions configuration register |
| RESERVED | r/w | 02 | 00000010 | - | Reserved |
| RESERVED | r/w | 03 | 00000011 | - | Reserved |
| SENSOR_SYNC_TIME_FRAME | r/w | 04 | 00000100 | 00000000 | Sensor sync configuration register |
| RESERVED | r/w | 05 | 00000101 | - | Reserved |
| FIFO_CTRL1 | r/w | 06 | 00000110 | 00000000 | FIFO configuration registers |
| FIFO_CTRL2 | r/w | 07 | 00000111 | 00000000 | |
| FIFO_CTRL3 | r/w | 08 | 00001000 | 00000000 | |
| FIFO_CTRL4 | r/w | 09 | 00001001 | 00000000 | |
| FIFO_CTRL5 | r/w | 0A | 00001010 | 00000000 | |
| ORIENT_CFG_G | r/w | 0B | 00001011 | 00000000 | |
| RESERVED | r/w | 0C | 00001100 | - | Reserved |
| INT1_CTRL | r/w | 0D | 00001101 | 00000000 | INT1 pin control |
| INT2_CTRL | r/w | 0E | 00001110 | 00000000 | INT2 pin control |
| WHO_AM_I | r | 0F | 00001111 | 01101001 | Who I am ID |
| CTRL1_XL | r/w | 10 | 00010000 | 00000000 | Accelerometer and gyroscope control registers |
| CTRL2_G | r/w | 11 | 00010001 | 00000000 | |
| CTRL3_C | r/w | 12 | 00010010 | 00000100 | |
| CTRL4_C | r/w | 13 | 00010011 | 00000000 | |
| CTRL5_C | r/w | 14 | 00010100 | 00000000 | |
| CTRL6_C | r/w | 15 | 00010101 | 00000000 | |
| CTRL7_G | r/w | 16 | 00010110 | 00000000 | |
| CTRL8_XL | r/w | 17 | 0001 0111 | 00000000 | |
| CTRL9_XL | r/w | 18 | 00011000 | 00111000 | |
| CTRL10_C | r/w | 19 | 00011001 | 00111000 | |

Table 16. Registers address map (continued)

| Name | Type | Register address | | Default | Comment |
|---------------|------|------------------|----------|----------|--|
| | | Hex | Binary | | |
| MASTER_CONFIG | r/w | 1A | 00011010 | 00000000 | I ² C master configuration register |
| WAKE_UP_SRC | r | 1B | 00011011 | output | Interrupts registers |
| TAP_SRC | r | 1C | 00011100 | output | |
| D6D_SRC | r | 1D | 00011101 | output | |
| STATUS_REG | r | 1E | 00011110 | output | Status data register |
| RESERVED | r | 1F | 00011111 | - | Reserved |
| OUT_TEMP_L | r | 20 | 00100000 | output | Temperature output data register |
| OUT_TEMP_H | r | 21 | 00100001 | output | |
| OUTX_L_G | r | 22 | 00100010 | output | Gyroscope output register |
| OUTX_H_G | r | 23 | 00100011 | output | |
| OUTY_L_G | r | 24 | 00100100 | output | |
| OUTY_H_G | r | 25 | 00100101 | output | |
| OUTZ_L_G | r | 26 | 00100110 | output | |
| OUTZ_H_G | r | 27 | 00100111 | output | |
| OUTX_L_XL | r | 28 | 00101000 | output | Accelerometer output register |
| OUTX_H_XL | r | 29 | 00101001 | output | |
| OUTY_L_XL | r | 2A | 00101010 | output | |
| OUTY_H_XL | r | 2B | 00101011 | output | |
| OUTZ_L_XL | r | 2C | 00101100 | output | |
| OUTZ_H_XL | r | 2D | 00101101 | output | |

Table 16. Registers address map (continued)

| Name | Type | Register address | | Default | Comment |
|------------------|------|------------------|-----------|---------|----------------------------------|
| | | Hex | Binary | | |
| SENSORHUB1_REG | r | 2E | 00101110 | output | Sensor hub output registers |
| SENSORHUB2_REG | r | 2F | 00101111 | output | |
| SENSORHUB3_REG | r | 30 | 00110000 | output | |
| SENSORHUB4_REG | r | 31 | 00110001 | output | |
| SENSORHUB5_REG | r | 32 | 00110010 | output | |
| SENSORHUB6_REG | r | 33 | 00110011 | output | |
| SENSORHUB7_REG | r | 34 | 00110100 | output | |
| SENSORHUB8_REG | r | 35 | 00110101 | output | |
| SENSORHUB9_REG | r | 36 | 00110110 | output | |
| SENSORHUB10_REG | r | 37 | 00110111 | output | |
| SENSORHUB11_REG | r | 38 | 00111000 | output | |
| SENSORHUB12_REG | r | 39 | 00111001 | output | |
| FIFO_STATUS1 | r | 3A | 00111010 | output | FIFO status registers |
| FIFO_STATUS2 | r | 3B | 00111011 | output | |
| FIFO_STATUS3 | r | 3C | 00111100 | output | |
| FIFO_STATUS4 | r | 3D | 00111101 | output | |
| FIFO_DATA_OUT_L | r | 3E | 00111110 | output | FIFO data output registers |
| FIFO_DATA_OUT_H | r | 3F | 00111111 | output | |
| TIMESTAMP0_REG | r | 40 | 01000000 | output | Timestamp output registers |
| TIMESTAMP1_REG | r | 41 | 01000001 | output | |
| TIMESTAMP2_REG | r/w | 42 | 01000010 | output | |
| RESERVED | | 43-48 | | -- | Reserved |
| STEP_TIMESTAMP_L | r | 49 | 0100 1001 | output | Step counter timestamp registers |
| STEP_TIMESTAMP_H | r | 4A | 0100 1010 | output | |
| STEP_COUNTER_L | r | 4B | 01001011 | output | Step counter output registers |
| STEP_COUNTER_H | r | 4C | 01001100 | output | |
| SENSORHUB13_REG | r | 4D | 01001101 | output | Sensor hub output registers |
| SENSORHUB14_REG | r | 4E | 01001110 | output | |
| SENSORHUB15_REG | r | 4F | 01001111 | output | |
| SENSORHUB16_REG | r | 50 | 01010000 | output | |
| SENSORHUB17_REG | r | 51 | 01010001 | output | |
| SENSORHUB18_REG | r | 52 | 01010010 | output | |
| FUNC_SRC | r | 53 | 01010011 | output | Interrupt register |

Table 16. Registers address map (continued)

| Name | Type | Register address | | Default | Comment |
|-----------------|------|------------------|-----------|----------|---|
| | | Hex | Binary | | |
| RESERVED | | 54-57 | | -- | Reserved |
| TAP_CFG | r/w | 58 | 01011000 | 00000000 | Interrupt registers |
| TAP_THS_6D | r/w | 59 | 01011001 | 00000000 | |
| INT_DUR2 | r/w | 5A | 01011010 | 00000000 | |
| WAKE_UP_THS | r/w | 5B | 01011011 | 00000000 | |
| WAKE_UP_DUR | r/w | 5C | 01011100 | 00000000 | |
| FREE_FALL | r/w | 5D | 01011101 | 00000000 | |
| MD1_CFG | r/w | 5E | 01011110 | 00000000 | |
| MD2_CFG | r/w | 5F | 01011111 | 00000000 | |
| RESERVED | | 60-65 | | - | Reserved |
| OUT_MAG_RAW_X_L | r | 66 | 0110 0110 | output | External magnetometer raw data output registers |
| OUT_MAG_RAW_X_H | r | 67 | 0110 0111 | output | |
| OUT_MAG_RAW_Y_L | r | 68 | 0110 1000 | output | |
| OUT_MAG_RAW_Y_H | r | 69 | 0110 1001 | output | |
| OUT_MAG_RAW_Z_L | r | 6A | 0110 1010 | output | |
| OUT_MAG_RAW_X_H | r | 6B | 0110 1011 | output | |

Registers marked as *Reserved* must not be changed. Writing to those registers may cause permanent damage to the device.

The content of the registers that are loaded at boot should not be changed. They contain the factory calibration values. Their content is automatically restored when the device is powered up.

9 Register description

The device contains a set of registers which are used to control its behavior and to retrieve linear acceleration, angular rate and temperature data. The register addresses, made up of 7 bits, are used to identify them and to write the data through the serial interface.

9.1 FUNC_CFG_ACCESS (01h)

Enable embedded functions register (r/w).

Table 17. FUNC_CFG_ACCESS register

| | | | | | | | |
|-------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| FUNC_CFG_EN | 0 ⁽¹⁾ |
|-------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 18. FUNC_CFG_ACCESS register description

| | |
|-------------|---|
| FUNC_CFG_EN | Enable access to the embedded functions configuration registers ⁽¹⁾ from address 02h to 32h. Default value: 0. (0: disable access to embedded functions configuration registers; 1: enable access to embedded functions configuration registers) |
|-------------|---|

1. The embedded functions configuration registers details are available in [10: Embedded functions register mapping](#) and [11: Embedded functions registers description](#).

9.2 SENSOR_SYNC_TIME_FRAME (04h)

Sensor synchronization time frame register (r/w).

Table 19. SENSOR_SYNC_TIME_FRAME register

| | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|
| TPH_7 | TPH_6 | TPH_5 | TPH_4 | TPH_3 | TPH_2 | TPH_1 | TPH_0 |
|-------|-------|-------|-------|-------|-------|-------|-------|

Table 20. ISENSOR_SYNC_TIME_FRAME register description

| | |
|-----------|---|
| TPH_[7:0] | Sensor synchronization time frame with the step of 500 ms and full range of 5 s. Unsigned 8-bit. Default value: 0000 0000 |
|-----------|---|

9.3 FIFO_CTRL1 (06h)

FIFO control register (r/w).

Table 21. FIFO_CTRL1 register

| | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|
| FTH_7 | FTH_6 | FTH_5 | FTH_4 | FTH_3 | FTH_2 | FTH_1 | FTH_0 |
|-------|-------|-------|-------|-------|-------|-------|-------|

Table 22. FIFO_CTRL1 register description

| | |
|-----------|---|
| FTH_[7:0] | FIFO threshold level setting ⁽¹⁾ . Default value: 0000 0000. Watermark flag rises when the number of bytes written to FIFO after the next write is greater than or equal to the threshold level. Minimum resolution for the FIFO is 1 LSB = 2 bytes (1 word) in FIFO |
|-----------|---|

1. For a complete watermark threshold configuration, consider FTH_[11:8] in [FIFO_CTRL2 \(07h\)](#).

9.4 FIFO_CTRL2 (07h)

FIFO control register (r/w).

Table 23. FIFO_CTRL2 register

| TIMER_PEDO _FIFO_EN | TIMER_PEDO _FIFO_DRDY | 0 ⁽¹⁾ | 0 ⁽¹⁾ | FTH_11 | FTH10 | FTH_9 | FTH_8 |
|------------------------|--------------------------|------------------|------------------|--------|-------|-------|-------|
|------------------------|--------------------------|------------------|------------------|--------|-------|-------|-------|

1. This bit must be set to '0' for the correct operation of the device.

Table 24. FIFO_CTRL2 register description

| | |
|--------------------------|--|
| TIMER_PEDO _FIFO_EN | Enable pedometer step counter and time stamp as 4 th FIFO data set. Default: 0 (0: disable step counter and time stamp data as 4 th FIFO data set; 1: enable step counter and time stamp data as 4 th FIFO data set) |
| TIMER_PEDO _FIFO_DRDY | FIFO write mode ⁽¹⁾ . Default: 0 (0: enable write in FIFO based on XL/Gyro data-ready; 1: enable write in FIFO at every step detected by step counter.) |
| FTH_[11:8] | FIFO threshold level setting ⁽²⁾ . Default value: 0000 Watermark flag rises when the number of bytes written to FIFO after the next write is greater than or equal to the threshold level. Minimum resolution for the FIFO is 1LSB = 2 bytes (1 word) in FIFO |

1. This bit is effective if the DATA_VALID_SEL_FIFO bit of the MASTER_CONFIG (1Ah) register is set to 0.
2. For a complete watermark threshold configuration, consider FTH_[11:8] in [FIFO_CTRL1 \(06h\)](#)

9.5 FIFO_CTRL3 (08h)

FIFO control register (r/w).

Table 25. FIFO_CTRL3 register

| 0 ⁽¹⁾ | 0 ⁽¹⁾ | DEC_FIFO _GYRO2 | DEC_FIFO _GYRO1 | DEC_FIFO _GYRO0 | DEC_FIFO _XL2 | DEC_FIFO _XL1 | DEC_FIFO _XL0 |
|------------------|------------------|--------------------|--------------------|--------------------|------------------|------------------|------------------|
|------------------|------------------|--------------------|--------------------|--------------------|------------------|------------------|------------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 26. FIFO_CTRL3 register description

| | |
|---------------------|---|
| DEC_FIFO_GYRO [2:0] | Gyro FIFO (first data set) decimation setting. Default: 000 For the configuration setting, refer to Table 27 . |
| DEC_FIFO_XL [2:0] | Accelerometer FIFO (second data set) decimation setting. Default: 000 For the configuration setting, refer to Table 28 . |

Table 27. Gyro FIFO decimation setting

| DEC_FIFO_GYRO [2:0] | Configuration |
|---------------------|---------------------------|
| 000 | Gyro sensor not in FIFO |
| 001 | No decimation |
| 010 | Decimation with factor 2 |
| 011 | Decimation with factor 3 |
| 100 | Decimation with factor 4 |
| 101 | Decimation with factor 8 |
| 110 | Decimation with factor 16 |
| 111 | Decimation with factor 32 |

Table 28. Accelerometer FIFO decimation setting

| DEC_FIFO_XL [2:0] | Configuration |
|-------------------|----------------------------------|
| 000 | Accelerometer sensor not in FIFO |
| 001 | No decimation |
| 010 | Decimation with factor 2 |
| 011 | Decimation with factor 3 |
| 100 | Decimation with factor 4 |
| 101 | Decimation with factor 8 |
| 110 | Decimation with factor 16 |
| 111 | Decimation with factor 32 |

9.6 FIFO_CTRL4 (09h)

FIFO control register (r/w).

Table 29. FIFO_CTRL4 register

| | | | | | | | |
|------------------|----------------|---------------|---------------|---------------|---------------|---------------|---------------|
| 0 ⁽¹⁾ | ONLY_HIGH_DATA | DEC_DS4_FIFO2 | DEC_DS4_FIFO1 | DEC_DS4_FIFO0 | DEC_DS3_FIFO2 | DEC_DS3_FIFO1 | DEC_DS3_FIFO0 |
|------------------|----------------|---------------|---------------|---------------|---------------|---------------|---------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 30. FIFO_CTRL4 register description

| | |
|-------------------|--|
| ONLY_HIGH_DATA | 8-bit data storage in FIFO. Default: 0 (0: disable MSByte only memorization in FIFO for XL and Gyro; 1: enable MSByte only memorization in FIFO for XL and Gyro in FIFO) |
| DEC_DS4_FIFO[2:0] | Fourth FIFO data set decimation setting. Default: 000 For the configuration setting, refer to Table 31 . |
| DEC_DS3_FIFO[2:0] | Third FIFO data set decimation setting. Default: 000 For the configuration setting, refer to Table 32 . |

Table 31. Fourth FIFO data set decimation setting

| DEC_DS4_FIFO[2:0] | Configuration |
|-------------------|----------------------------------|
| 000 | Fourth FIFO data set not in FIFO |
| 001 | No decimation |
| 010 | Decimation with factor 2 |
| 011 | Decimation with factor 3 |
| 100 | Decimation with factor 4 |
| 101 | Decimation with factor 8 |
| 110 | Decimation with factor 16 |
| 111 | Decimation with factor 32 |

Table 32. Third FIFO data set decimation setting

| DEC_DS3_FIFO[2:0] | Configuration |
|-------------------|---------------------------------|
| 000 | Third FIFO data set not in FIFO |
| 001 | No decimation |
| 010 | Decimation with factor 2 |
| 011 | Decimation with factor 3 |
| 100 | Decimation with factor 4 |
| 101 | Decimation with factor 8 |
| 110 | Decimation with factor 16 |
| 111 | Decimation with factor 32 |

9.7 FIFO_CTRL5 (0Ah)

FIFO control register (r/w).

Table 33. FIFO_CTRL5 register

| 0 ⁽¹⁾ | ODR_FIFO_3 | ODR_FIFO_2 | ODR_FIFO_1 | ODR_FIFO_0 | FIFO_MODE_2 | FIFO_MODE_1 | FIFO_MODE_0 |
|------------------|------------|------------|------------|------------|-------------|-------------|-------------|
|------------------|------------|------------|------------|------------|-------------|-------------|-------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 34. FIFO_CTRL5 register description

| | |
|-----------------|--|
| ODR_FIFO_[3:0] | FIFO ODR selection, setting FIFO_MODE also. Default: 0000 For the configuration setting, refer to Table 35 |
| FIFO_MODE_[2:0] | FIFO mode selection bits, setting ODR_FIFO also. Default value: 000 For the configuration setting refer to Table 36 |

Table 35. FIFO ODR selection

| ODR_FIFO_[3:0] | Configuration ⁽¹⁾ |
|----------------|------------------------------|
| 0000 | FIFO disabled |
| 0001 | FIFO ODR is set to 13 Hz |
| 0010 | FIFO ODR is set to 26 Hz |
| 0011 | FIFO ODR is set to 52 Hz |
| 0100 | FIFO ODR is set to 104 Hz |
| 0101 | FIFO ODR is set to 208 Hz |
| 0110 | FIFO ODR is set to 416 Hz |
| 0111 | FIFO ODR is set to 833 Hz |
| 1000 | FIFO ODR is set to 1.66 kHz |
| 1001 | FIFO ODR is set to 3.33 kHz |
| 1010 | FIFO ODR is set to 6.66 kHz |

1. If the device is working at an ODR slower than the one selected, FIFO ODR is limited to that ODR value. Moreover, these bits are effective if both the DATA_VALID_SEL FIFO bit of MASTER_CONFIG (1Ah) and the TIMER_PEDO_FIFO_DRDY bit of FIFO_CTRL2 (07h) are set to 0.

Table 36. FIFO mode selection

| FIFO_MODE_[2:0] | Configuration mode |
|-----------------|--|
| 000 | Bypass mode. FIFO disabled. |
| 001 | FIFO mode. Stops collecting data when FIFO is full. |
| 010 | Reserved |
| 011 | Continuous mode until trigger is deasserted, then FIFO mode. |
| 100 | Bypass mode until trigger is deasserted, then Continuous mode. |
| 101 | Reserved |
| 110 | Continuous mode. If the FIFO is full, the new sample overwrites the older one. |
| 111 | Reserved |

9.8 ORIENT_CFG_G (0Bh)

Angular rate sensor sign and orientation register (r/w).

Table 37. ORIENT_CFG_G register

| | | | | | | | |
|------------------|------------------|---------|---------|---------|----------|----------|----------|
| 0 ⁽¹⁾ | 0 ⁽¹⁾ | SignX_G | SignY_G | SignZ_G | Orient_2 | Orient_1 | Orient_0 |
|------------------|------------------|---------|---------|---------|----------|----------|----------|

1. This bit must be set to '0' for the correct operation of the device.

Table 38. ORIENT_CFG_G register description

| | |
|--------------|--|
| SignX_G | Pitch axis (X) angular rate sign. Default value: 0 (0: positive sign; 1: negative sign) |
| SignY_G | Roll axis (Y) angular rate sign. Default value: 0 (0: positive sign; 1: negative sign) |
| SignZ_G | Yaw axis (Z) angular rate sign. Default value: 0 (0: positive sign; 1: negative sign) |
| Orient [2:0] | Directional user-orientation selection. Default value: 000 For the configuration setting, refer to Table 39 . |

Table 39. Settings for orientation of axes

| Orient [2:0] | 000 | 001 | 010 | 011 | 100 | 101 |
|--------------|-----|-----|-----|-----|-----|-----|
| Pitch | X | X | Y | Y | Z | Z |
| Roll | Y | Z | X | Z | X | Y |
| Yaw | Z | Y | Z | X | Y | X |

9.9 INT1_CTRL (0Dh)

INT1 pad control register (r/w).

Each bit in this register enables a signal to be carried through INT1. The pad's output will supply the OR combination of the selected signals.

Table 40. INT1_CTRL register

| INT1_STEP_DETECTOR | INT1_SIGN_MOT | INT1_FULL_FLAG | INT1_FIFO_OVR | INT1_FTH | INT1_BOOT | INT1_DRDY_G | INT1_DRDY_XL |
|--------------------|---------------|----------------|---------------|----------|-----------|-------------|--------------|
|--------------------|---------------|----------------|---------------|----------|-----------|-------------|--------------|

Table 41. INT1_CTRL register description

| | |
|--------------------|--|
| INT1_STEP_DETECTOR | Pedometer step recognition interrupt enable on INT1 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT1_SIGN_MOT | Significant motion interrupt enable on INT1 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT1_FULL_FLAG | FIFO full flag interrupt enable on INT1 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT1_FIFO_OVR | FIFO overrun interrupt on INT1 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT1_FTH | FIFO threshold interrupt on INT1 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT1_BOOT | Boot status available on INT1 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT1_DRDY_G | Gyroscope Data Ready on INT1 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT1_DRDY_XL | Accelerometer Data Ready on INT1 pad. Default value: 0 (0: disabled; 1: enabled) |

9.10 INT2_CTRL (0Eh)

INT2 pad control register (r/w).

Each bit in this register enables a signal to be carried through INT2. The pad's output will supply the OR combination of the selected signals.

Table 42. INT2_CTRL register

| INT2_STEP_DELTA | INT2_STEP_COUNT_OV | INT2_FULL_FLAG | INT2_FIFO_OVR | INT2_FTH | INT2_DRDY_TEMP | INT2_DRDY_G | INT2_DRDY_XL |
|-----------------|--------------------|----------------|---------------|----------|----------------|-------------|--------------|
|-----------------|--------------------|----------------|---------------|----------|----------------|-------------|--------------|

Table 43. INT2_CTRL register description

| | |
|--------------------|--|
| INT2_STEP_DELTA | Pedometer step recognition interrupt on delta time ⁽¹⁾ enable on INT2 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT2_STEP_COUNT_OV | Step counter overflow interrupt enable on INT2 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT2_FULL_FLAG | FIFO full flag interrupt enable on INT2 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT2_FIFO_OVR | FIFO overrun interrupt on INT2 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT2_FTH | FIFO threshold interrupt on INT2 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT2_DRDY_TEMP | Temperature Data Ready in INT2 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT2_DRDY_G | Gyroscope Data Ready on INT2 pad. Default value: 0 (0: disabled; 1: enabled) |
| INT2_DRDY_XL | Accelerometer Data Ready on INT2 pad. Default value: 0 (0: disabled; 1: enabled) |

1. Delta time value is defined in register STEP_COUNT_DELTA (15h).

9.11 WHO_AM_I (0Fh)

Who_AM_I register (r). This register is a read-only register. Its value is fixed at 69h.

Table 44. WHO_AM_I register

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 0 | 1 | 1 | 0 | 1 | 0 | 0 | 1 |
|---|---|---|---|---|---|---|---|

9.12 CTRL1_XL (10h)

Linear acceleration sensor control register 1 (r/w).

Table 45. CTRL1_XL register

| ODR_XL3 | ODR_XL2 | ODR_XL1 | ODR_XL0 | FS_XL1 | FS_XL0 | BW_XL1 | BW_XL0 |
|---------|---------|---------|---------|--------|--------|--------|--------|
|---------|---------|---------|---------|--------|--------|--------|--------|

Table 46. CTRL1_XL register description

| | |
|--------------|---|
| ODR_XL [3:0] | Output data rate and power mode selection. Default value: 0000 (see Table 47). |
| FS_XL [1:0] | Accelerometer full-scale selection. Default value: 00. (00: $\pm 2\text{ g}$; 01: $\pm 16\text{ g}$; 10: $\pm 4\text{ g}$; 11: $\pm 8\text{ g}$) |
| BW_XL [1:0] | Anti-aliasing filter bandwidth selection. Default value: 00 (00: 400 Hz; 01: 200 Hz; 10: 100 Hz; 11: 50 Hz) |

Table 47. Accelerometer ODR register setting

| ODR_XL3 | ODR_XL2 | ODR_XL1 | ODR_XL0 | ODR selection [Hz] when XL_HM_MODE = 1 | ODR selection [Hz] when XL_HM_MODE = 0 |
|---------|---------|---------|---------|--|--|
| 0 | 0 | 0 | 0 | Power-down | Power-down |
| 0 | 0 | 0 | 1 | 13 Hz (low power) | 13 Hz (high performance) |
| 0 | 0 | 1 | 0 | 26 Hz (low power) | 26 Hz (high performance) |
| 0 | 0 | 1 | 1 | 52 Hz (low power) | 52 Hz (high performance) |
| 0 | 1 | 0 | 0 | 104 Hz (normal mode) | 104 Hz (high performance) |
| 0 | 1 | 0 | 1 | 208 Hz (normal mode) | 208 Hz (high performance) |
| 0 | 1 | 1 | 0 | 416 Hz (high performance) | 416 Hz (high performance) |
| 0 | 1 | 1 | 1 | 833 Hz (high performance) | 833 Hz (high performance) |
| 1 | 0 | 0 | 0 | 1.66 kHz (high performance) | 1.66 kHz (high performance) |
| 1 | 0 | 0 | 1 | 3.33 kHz (high performance) | 3.33 kHz (high performance) |
| 1 | 0 | 1 | 0 | 6.66 kHz (high performance) | 6.66 kHz (high performance) |

Table 48. BW and ODR (high-performance mode)

| ODR ⁽¹⁾ | Analog filter BW (XL_HM_MODE = 0) | |
|--------------------|-----------------------------------|---|
| | XL_BW_SCAL_ODR = 0 | XL_BW_SCAL_ODR = 1 |
| 6.66 - 3.33 kHz | Filter not used | Bandwidth is determined by setting BW_XL[1:0] in CTRL1_XL (10h) |
| 1.66 kHz | 400 Hz | |
| 833 Hz | 400 Hz | |
| 416 Hz | 200 Hz | |
| 208 Hz | 100 Hz | |
| 104 - 13 Hz | 50 Hz | |

1. Filter not used when accelerometer is in normal and low-power modes.

9.13 CTRL2_G (11h)

Angular rate sensor control register 2 (r/w).

Table 49. CTRL2_G register

| | | | | | | | |
|--------|--------|--------|--------|-------|-------|--------|------------------|
| ODR_G3 | ODR_G2 | ODR_G1 | ODR_G0 | FS_G1 | FS_G0 | FS_125 | 0 ⁽¹⁾ |
|--------|--------|--------|--------|-------|-------|--------|------------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 50. CTRL2_G register description

| | |
|-------------|---|
| ODR_G [3:0] | Gyroscope output data rate selection. Default value: 0000 (Refer to Table 49) |
| FS_G [1:0] | Gyroscope full-scale selection. Default value: 00 (00: 245 dps; 01: 500 dps; 10: 1000 dps; 11: 2000 dps) |
| FS_125 | Gyroscope full-scale at 125 dps. Default value: 0 (0: disabled; 1: enabled) |

Table 51. Gyroscope ODR configuration setting

| ODR_G3 | ODR_G2 | ODR_G1 | ODR_G0 | ODR [Hz] when G_HM_MODE = 1 | ODR [Hz] when G_HM_MODE = 0 |
|--------|--------|--------|--------|-----------------------------|-----------------------------|
| 0 | 0 | 0 | 0 | Power down | Power down |
| 0 | 0 | 0 | 1 | 13 Hz (low power) | 13 Hz (high performance) |
| 0 | 0 | 1 | 0 | 26 Hz (low power) | 26 Hz (high performance) |
| 0 | 0 | 1 | 1 | 52 Hz (low power) | 52 Hz (high performance) |
| 0 | 1 | 0 | 0 | 104 Hz (normal mode) | 104 Hz (high performance) |
| 0 | 1 | 0 | 1 | 208 Hz (normal mode) | 208 Hz (high performance) |
| 0 | 1 | 1 | 0 | 416 Hz (high performance) | 416 Hz (high performance) |
| 0 | 1 | 1 | 1 | 833 Hz (high performance) | 833 Hz (high performance) |
| 1 | 0 | 0 | 0 | 1.66 kHz (high performance) | 1.66 kHz (high performance) |

9.14 CTRL3_C (12h)

Control register 3 (r/w).

Table 52. CTRL3_C register

| BOOT | BDU | H_LACTIVE | PP_OD | SIM | IF_INC | BLE | SW_RESET |
|------|-----|-----------|-------|-----|--------|-----|----------|
|------|-----|-----------|-------|-----|--------|-----|----------|

Table 53. CTRL3_C register description

| | |
|-----------|---|
| BOOT | Reboot memory content. Default value: 0 (0: normal mode; 1: reboot memory content ⁽¹⁾) |
| BDU | Block Data Update. Default value: 0 (0: continuous update; 1: output registers not updated until MSB and LSB have been read) |
| H_LACTIVE | Interrupt activation level. Default value: 0 (0: interrupt output pads active high; 1: interrupt output pads active low) |
| PP_OD | Push-pull/open-drain selection on INT1 and INT2 pads. Default value: 0 (0: push-pull mode; 1: open-drain mode) |
| SIM | SPI Serial Interface Mode selection. Default value: 0 (0: 4-wire interface; 1: 3-wire interface). |
| IF_INC | Register address automatically incremented during a multiple byte access with a serial interface (I ² C or SPI). Default value: 1 (0: disabled; 1: enabled) |
| BLE | Big/Little Endian Data selection. Default value 0 (0: data LSB @ lower address; 1: data MSB @ lower address) |
| SW_RESET | Software reset. Default value: 0 (0: normal mode; 1: reset device) This bit is cleared by hardware after next flash boot. |

1. Boot request is executed as soon as internal oscillator is turned on. It is possible to set bit while in power-down mode, in this case it will be served at the next normal mode or sleep mode.

9.15 CTRL4_C (13h)

Control register 4 (r/w).

Table 54. CTRL4_C register

| XL_BW_SCAL_ODR | SLEEP_G | INT2_on_INT1 | FIFO_TEMP_EN | DRDY_MASK | I2C_disable | MODE3_EN | STOP_ON_FTH |
|----------------|---------|--------------|--------------|-----------|-------------|----------|-------------|
|----------------|---------|--------------|--------------|-----------|-------------|----------|-------------|

Table 55. CTRL4_C register description

| | |
|----------------|---|
| XL_BW_SCAL_ODR | Accelerometer bandwidth selection. Default value: 0 (0 ⁽¹⁾ : bandwidth determined by ODR selection, refer to Table 48 ; 1 ⁽²⁾ : bandwidth determined by setting BW_XL[1:0] in CTRL1_XL (10h) register.) |
| SLEEP_G | Gyroscope sleep mode enable. Default value: 0 (0: disabled; 1: enabled) |
| INT2_on_INT1 | All interrupt signals available on INT1 pad enable. Default value: 0 (0: interrupt signals divided between INT1 and INT2 pads; 1: all interrupt signals in logic or on INT1 pad) |
| FIFO_TEMP_EN | Enable temperature data as 4 th FIFO data set ⁽³⁾ . Default: 0 (0: disable temperature data as 4 th FIFO data set; 1: enable temperature data as 4 th FIFO data set) |
| DRDY_MASK | Configuration 1 ⁽⁴⁾ data available enable bit. Default value: 0 (0: DA timer disabled; 1: DA timer enabled) |
| I2C_disable | Disable I ² C interface. Default value: 0 (0: both I ² C and SPI enabled; 1: I ² C disabled, SPI only) |
| MODE3_EN | Enable auxiliary SPI interface (Mode 3, refer to Table 2). Default value: 0 (0: auxiliary SPI disabled; 1: auxiliary SPI enabled ⁽⁵⁾) |
| STOP_ON_FTH | Enable FIFO threshold level use. Default value: 0. (0: FIFO depth is not limited; 1: FIFO depth is limited to threshold level) |

1. Filter used in high-performance mode only with ODR less than 3.33 kHz.
2. Filter used in high-performance mode only.
3. This bit is effective if the TIMER_PEDO_FIFO_EN bit of FIFO_CTRL2 register is set to 0.
4. In configuration 1, switching to combo mode, data are collected in FIFO only when both accelerometer and gyroscope are set. Switching to accelerometer only, data are collected in FIFO after filter setting.
5. Conditioned pads are: SDx, SCx, OCS

9.16 CTRL5_C (14h)

Control register 5 (r/w).

Table 56. CTRL5_C register

| ROUNDING2 | ROUNDING1 | ROUNDING0 | 0 ⁽¹⁾ | ST1_G | ST0_G | ST1_XL | ST0_XL |
|-----------|-----------|-----------|------------------|-------|-------|--------|--------|
|-----------|-----------|-----------|------------------|-------|-------|--------|--------|

1. This bit must be set to '0' for the correct operation of the device

Table 57. CTRL5_C register description

| | |
|---------------|---|
| ROUNDING[2:0] | Circular burst-mode (rounding) read from output registers. Default: 000 (000: no rounding; Others: refer to Table 58) |
| ST_G [1:0] | Angular rate sensor self-test enable. Default value: 00 (00: Self-test disabled; Other: refer to Table 59) |
| ST_XL [1:0] | Linear acceleration sensor self-test enable. Default value: 00 (00: Self-test disabled; Other: refer to Table 60) |

Table 58. Output registers rounding pattern

| ROUNDING[2:0] | Rounding pattern |
|---------------|---|
| 000 | No rounding |
| 001 | Accelerometer only |
| 010 | Gyroscope only |
| 011 | Gyroscope + accelerometer |
| 100 | Registers from SENSORHUB1_REG (2Eh) to SENSORHUB6_REG (33h) only |
| 101 | Accelerometer + registers from SENSORHUB1_REG (2Eh) to SENSORHUB6_REG (33h) |
| 110 | Gyroscope + accelerometer + registers from SENSORHUB1_REG (2Eh) to SENSORHUB6_REG (33h) and registers from SENSORHUB7_REG (34h) to SENSORHUB12_REG(39h) |
| 111 | Gyroscope + accelerometer + registers from SENSORHUB1_REG (2Eh) to SENSORHUB6_REG (33h) |

Table 59. Angular rate sensor self-test mode selection

| ST1_G | ST0_G | Self-test mode |
|-------|-------|-------------------------|
| 0 | 0 | Normal mode |
| 0 | 1 | Positive sign self-test |
| 1 | 0 | Not allowed |
| 1 | 1 | Negative sign self-test |

Table 60. Linear acceleration sensor self-test mode selection

| ST1_XL | ST0_XL | Self-test mode |
|--------|--------|-------------------------|
| 0 | 0 | Normal mode |
| 0 | 1 | Positive sign self-test |
| 1 | 0 | Negative sign self-test |
| 1 | 1 | Not allowed |

9.17 CTRL6_C (15h)

Angular rate sensor control register 6 (r/w).

Table 61. CTRL6_C register

| | | | | | | | |
|---------|-------|---------|------------|------------------|------------------|------------------|------------------|
| TRIG_EN | LVLen | LVL2_EN | XL_HM_MODE | 0 ⁽¹⁾ | 0 ⁽¹⁾ | 0 ⁽¹⁾ | 0 ⁽¹⁾ |
|---------|-------|---------|------------|------------------|------------------|------------------|------------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 62. CTRL6_C register description

| | |
|------------|---|
| TRIG_EN | Gyroscope data edge-sensitive trigger enable. Default value: 0 (0: external trigger disabled; 1: external trigger enabled) |
| LVLen | Gyroscope data level-sensitive trigger enable. Default value: 0 (0: level-sensitive trigger disabled; 1: level sensitive trigger enabled) |
| LVL2_EN | Gyroscope level-sensitive latched enable. Default value: 0 (0: level-sensitive latched disabled; 1: level sensitive latched enabled) |
| XL_HM_MODE | High-performance operating mode disable for accelerometer ⁽¹⁾ . Default value: 0 (0: high-performance operating mode enabled; 1: high-performance operating mode disabled) |

1. Normal and low-power mode depends on the ODR setting, for details refer to [Table 47](#).

9.18 CTRL7_G (16h)

Angular rate sensor control register 7 (r/w).

Table 63. CTRL7_G register

| | | | | | | | |
|-----------|---------|---------|---------|----------|-----------------|------------------|------------------|
| G_HM_MODE | HP_G_EN | HPCF_G1 | HPCF_G0 | HP_G_RST | ROUNDING_STATUS | 0 ⁽¹⁾ | 0 ⁽¹⁾ |
|-----------|---------|---------|---------|----------|-----------------|------------------|------------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 64. CTRL7_G register description

| | |
|-----------------|--|
| G_HM_MODE | High-performance operating mode disable for gyroscope ⁽¹⁾ . Default: 0 (0: high-performance operating mode enabled; 1: high-performance operating mode disabled) |
| HP_G_EN | Gyroscope high-pass filter enable. Default value: 0 (0: HPF disabled; 1: HPF enabled) |
| HP_G_RST | Gyro digital HP filter reset. Default: 0 (0: gyro digital HP filter reset OFF; 1: gyro digital HP filter reset ON) |
| ROUNDING_STATUS | Source register rounding function enable on STATUS_REG (1Eh) , FUNC_SRC (53h) and WAKE_UP_SRC (1Bh) registers. Default value: 0 (0: disabled; 1: enabled) |
| HPCF_G[1:0] | Gyroscope high-pass filter cutoff frequency selection. Default value: 00. Refer to Table 65 . |

1. Normal and low-power mode depends on the ODR setting, for details refer to [Table 51](#).

Table 65. Gyroscope high-pass filter mode configuration

| HPCF_G1 | HPCF_G0 | High-pass filter cutoff frequency |
|---------|---------|-----------------------------------|
| 0 | 0 | 0.0081 Hz |
| 0 | 1 | 0.0324 Hz |
| 1 | 0 | 2.07 Hz |
| 1 | 1 | 16.32 Hz |

9.19 CTRL8_XL (17h)

Linear acceleration sensor control register 8 (r/w).

Table 66. CTRL8_XL register

| LPF2_XL_EN | HPCF_XL1 | HPCF_XL0 | 0 ⁽¹⁾ | 0 ⁽¹⁾ | HP_SLOPE_XL_EN | 0 ⁽¹⁾ | LOW_PASS_ON_6D |
|------------|----------|----------|------------------|------------------|----------------|------------------|----------------|
|------------|----------|----------|------------------|------------------|----------------|------------------|----------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 67. CTRL8_XL register description

| | |
|----------------|---|
| LPF2_XL_EN | Accelerometer low-pass filter LPF2 selection. Refer to Figure 5 . |
| HPCF_XL[1:0] | Accelerometer slope filter and high-pass filter configuration and cutoff setting. Refer to Table 68 . |
| HP_SLOPE_XL_EN | Accelerometer slope filter / high-pass filter selection. Refer to Figure 5 . |
| LOW_PASS_ON_6D | Low-pass filter on 6D function selection. Refer to Figure 5 . |

Table 68. Accelerometer slope and high-pass filter selection and cutoff frequency

| HPCF_XL[1:0] | Applied filter | HP filter cutoff frequency [Hz] |
|--------------|----------------|---------------------------------|
| 00 | Slope | ODR_XL/50 |
| 01 | High-pass | ODR_XL/100 |
| 10 | High-pass | ODR_XL/9 |
| 11 | High-pass | ODR_XL/400 |

9.20 CTRL9_XL (18h)

Linear acceleration sensor control register 9 (r/w).

Table 69. CTRL9_XL register

| | | | | | | | |
|------------------|------------------|--------|--------|--------|---------|------------------|------------------|
| 0 ⁽¹⁾ | 0 ⁽¹⁾ | Zen_XL | Yen_XL | Xen_XL | SOFT_EN | 0 ⁽¹⁾ | 0 ⁽¹⁾ |
|------------------|------------------|--------|--------|--------|---------|------------------|------------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 70. CTRL9_XL register description

| | |
|---------|---|
| Zen_XL | Accelerometer Z-axis output enable. Default value: 1 (0: Z-axis output disabled; 1: Z-axis output enabled) |
| Yen_XL | Accelerometer Y-axis output enable. Default value: 1 (0: Y-axis output disabled; 1: Y-axis output enabled) |
| Xen_XL | Accelerometer X-axis output enable. Default value: 1 (0: X-axis output disabled; 1: X-axis output enabled) |
| SOFT_EN | Enable soft-iron correction algorithm for magnetometer ⁽¹⁾ . Default value: 0 (0: soft-iron correction algorithm disabled; 1: soft-iron correction algorithm disabled) |

1. This bit is effective if the IRON_EN bit of MASTER_CONFIG (1Ah) is set to 1.

9.21 CTRL10_C (19h)

Control register 10 (r/w).

Table 71. CTRL10_C register

| 0 ⁽¹⁾ | 0 ⁽¹⁾ | Zen_G | Yen_G | Xen_G | FUNC_EN | PEDO_RST_STEP | SIGN_MOTION_EN |
|------------------|------------------|-------|-------|-------|---------|---------------|----------------|
|------------------|------------------|-------|-------|-------|---------|---------------|----------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 72. CTRL10_C register description

| | |
|----------------|--|
| Zen_G | Gyroscope yaw axis (Z) output enable. Default value: 1 (0: Z-axis output disabled; 1: Z-axis output enabled) |
| Yen_G | Gyroscope roll axis (Y) output enable. Default value: 1 (0: Y-axis output disabled; 1: Y axis output enabled) |
| Xen_G | Gyroscope pitch axis (X) output enable. Default value: 1 (0: X-axis output disabled; 1: X-axis output enabled) |
| FUNC_EN | Enable embedded functionalities (pedometer, tilt, significant motion, sensor hub and ironing) and accelerometer HP and LPF2 filters (refer to Figure 5). Default value: 0 (0: disable functionalities of embedded functions and accelerometer filters; 1: enable functionalities of embedded functions and accelerometer filters) |
| PEDO_RST_STEP | Reset pedometer step counter. Default value: 0 (0: disabled; 1: enabled) |
| SIGN_MOTION_EN | Enable significant motion function. Default value: 0 (0: disabled; 1: enabled) |

9.22 MASTER_CONFIG (1Ah)

Master configuration register (r/w).

Table 73. MASTER_CONFIG register

| DRDY_ON_INT1 | DATA_VALID_SEL_FIFO | 0 ⁽¹⁾ | START_CONFIG | PULL_UP_EN | PASS_THROUGH_MODE | IRON_EN | MASTER_ON |
|--------------|---------------------|------------------|--------------|------------|-------------------|---------|-----------|
|--------------|---------------------|------------------|--------------|------------|-------------------|---------|-----------|

1. This bit must be set to '0' for the correct operation of the device.

Table 74. MASTER_CONFIG register description

| | |
|---------------------|---|
| DRDY_ON_INT1 | Manage the Master DRDY signal on INT1 pad. Default: 0 (0: disable Master DRDY on INT1; 1: enable Master DRDY on INT1) |
| DATA_VALID_SEL_FIFO | Selection of FIFO data-valid signal. Default value: 0 (0: data-valid signal used to write data in FIFO is the XL/Gyro data-ready or step detection ⁽¹⁾ ; 1: data-valid signal used to write data in FIFO is the sensor hub data-ready) |
| START_CONFIG | Sensor Hub trigger signal selection. Default value: 0 (0: Sensor hub signal is the XL/Gyro data-ready; 1: Sensor hub signal external from INT2 pad.) |
| PULL_UP_EN | Auxiliary I ² C pull-up. Default value: 0 (0: internal pull-up on auxiliary I ² C line disabled; 1: internal pull-up on auxiliary I ² C line enabled) |
| PASS_THROUGH_MODE | I ² C interface pass-through. Default value: 0 (0: through disabled; 1: through enabled) |
| IRON_EN | Enable hard-iron correction algorithm for magnetometer. Default value: 0 (0:hard-iron correction algorithm disabled; 1: hard-iron correction algorithm enabled) |
| MASTER_ON | Sensor hub I ² C master enable. Default: 0 (0: master I ² C of sensor hub disabled; 1: master I ² C of sensor hub enabled) |

1. If the TIMER_PEDO_FIFO_DRDY bit in FIFO_CTRL2(07h) is set to 0, the trigger for writing data in FIFO is XL/Gyro data-ready, otherwise it's the step detection.

9.23 WAKE_UP_SRC (1Bh)

Wake up interrupt source register (r).

Table 75. WAKE_UP_SRC register

| 0 ⁽¹⁾ | 0 ⁽¹⁾ | FF_IA | SLEEP_STATE_IA | WU_IA | X_WU | Y_WU | Z_WU |
|------------------|------------------|-------|----------------|-------|------|------|------|
|------------------|------------------|-------|----------------|-------|------|------|------|

1. This bit must be set to '0' for the correct operation of the device.

Table 76. WAKE_UP_SRC register description

| | |
|----------------|---|
| FF_IA | Free-fall event detection status. Default: 0 (0: free-fall event not detected; 1: free-fall event detected) |
| SLEEP_STATE_IA | Sleep event status. Default value: 0 (0: sleep event not detected; 1: sleep event detected) |
| WU_IA | Wakeup event detection status. Default value: 0 (0: wakeup event not detected; 1: wakeup event detected.) |
| X_WU | Wakeup event detection status on X-axis. Default value: 0 (0: wakeup event on X-axis not detected; 1: wakeup event on X-axis detected) |
| Y_WU | Wakeup event detection status on Y-axis. Default value: 0 (0: wakeup event on Y-axis not detected; 1: wakeup event on Y-axis detected) |
| Z_WU | Wakeup event detection status on Z-axis. Default value: 0 (0: wakeup event on Z-axis not detected; 1: wakeup event on Z-axis detected) |

9.24 TAP_SRC (1Ch)

Tap source register (r).

Table 77. TAP_SRC register

| 0 ⁽¹⁾ | TAP_IA | SINGLE_TAP | DOUBLE_TAP | TAP_SIGN | X_TAP | Y_TAP | Z_TAP |
|------------------|--------|------------|------------|----------|-------|-------|-------|
|------------------|--------|------------|------------|----------|-------|-------|-------|

1. This bit must be set to '0' for the correct operation of the device.

Table 78. TAP_SRC register description

| | |
|------------|---|
| TAP_IA | Tap event detection status. Default: 0 (0: tap event not detected; 1: tap event detected) |
| SINGLE_TAP | Single-tap event status. Default value: 0 (0: single tap event not detected; 1: single tap event detected) |
| DOUBLE_TAP | Double-tap event detection status. Default value: 0 (0: double-tap event not detected; 1: double-tap event detected.) |
| TAP_SIGN | Sign of acceleration detected by tap event. Default: 0 (0: positive sign of acceleration detected by tap event; 1: negative sign of acceleration detected by tap event) |
| X_TAP | Tap event detection status on X-axis. Default value: 0 (0: tap event on X-axis not detected; 1: tap event on X-axis detected) |
| Y_TAP | Tap event detection status on Y-axis. Default value: 0 (0: tap event on Y-axis not detected; 1: tap event on Y-axis detected) |
| Z_TAP | Tap event detection status on Z-axis. Default value: 0 (0: tap event on Z-axis not detected; 1: tap event on Z-axis detected) |

9.25 D6D_SRC (1Dh)

Portrait, landscape, face-up and face-down source register (r)

Table 79. D6D_SRC register

| 0 ⁽¹⁾ | D6D_IA | ZH | ZL | YH | YL | XH | XL |
|------------------|--------|----|----|----|----|----|----|
|------------------|--------|----|----|----|----|----|----|

1. This bit must be set to '0' for the correct operation of the device.

Table 80. D6D_SRC register description

| | |
|--------|--|
| D6D_IA | Interrupt active for change position portrait, landscape, face-up, face-down. Default value: 0 (0: change position not detected; 1: change position detected) |
| ZH | Z-axis high event (over threshold). Default value: 0 (0: event not detected; 1: event (over threshold) detected) |
| ZL | Z-axis low event (under threshold). Default value: 0 (0: event not detected; 1: event (under threshold) detected) |
| YH | Y-axis high event (over threshold). Default value: 0 (0: event not detected; 1: event (over-threshold) detected) |
| YL | Y-axis low event (under threshold). Default value: 0 (0: event not detected; 1: event (under threshold) detected) |
| X_H | X-axis high event (over threshold). Default value: 0 (0: event not detected; 1: event (over threshold) detected) |
| X_L | X-axis low event (under threshold). Default value: 0 (0: event not detected; 1: event (under threshold) detected) |

9.26 STATUS_REG (1Eh)

Table 81. STATUS_REG register

| | | | | | | | |
|---|---|---|---|---------|-----|-----|------|
| - | - | - | - | EV_BOOT | TDA | GDA | XLDA |
|---|---|---|---|---------|-----|-----|------|

Table 82. STATUS_REG register description

| | |
|---------|--|
| EV_BOOT | Boot running flag signal. Default value: 0 (0: no boot running; 1: boot running) |
| TDA | Temperature new data available. Default: 0 (0: no set of data is available at temperature sensor output; 1: a new set of data is available at temperature sensor output) |
| GDA | Gyroscope new data available. Default value: 0 (0: no set of data available at gyroscope output; 1: a new set of data is available at gyroscope output) |
| XLDA | Accelerometer new data available. Default value: 0 (0: no set of data available at accelerometer output; 1: a new set of data is available at accelerometer output) |

9.27 OUT_TEMP_L (20h), OUT_TEMP(21h)

Temperature data output register (r). L and H registers together express a 16-bit word in two's complement (r).

Table 83. OUT_TEMP_L register

| | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|
| Temp7 | Temp6 | Temp5 | Temp4 | Temp3 | Temp2 | Temp1 | Temp0 |
|-------|-------|-------|-------|-------|-------|-------|-------|

Table 84. OUT_TEMP_H register

| | | | | | | | |
|--------|--------|--------|--------|--------|--------|-------|-------|
| Temp15 | Temp14 | Temp13 | Temp12 | Temp11 | Temp10 | Temp9 | Temp8 |
|--------|--------|--------|--------|--------|--------|-------|-------|

Table 85. OUT_TEMP register description

| | |
|------------|--|
| Temp[15:0] | Temperature sensor output data The value is expressed as two's complement sign extended on the MSB. |
|------------|--|

9.28 OUTX_L_G (22h)

Angular rate sensor pitch axis (X) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r)

Table 86. OUTX_L_G register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Table 87. OUTX_L_G register description

| | |
|--------|--|
| D[7:0] | Pitch axis (X) angular rate value (LSbyte) |
|--------|--|

9.29 OUTX_H_G (23h)

Angular rate sensor pitch axis (X) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r)

Table 88. OUTX_H_G register

| | | | | | | | |
|-----|-----|-----|-----|-----|-----|----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|

Table 89. OUTX_H_G register description

| | |
|---------|--|
| D[15:8] | Pitch axis (X) angular rate value (MSbyte) |
|---------|--|

9.30 OUTY_L_G (24h)

Angular rate sensor roll axis (Y) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r)

Table 90. OUTY_L_G register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Table 91. OUTY_L_G register description

| | |
|--------|---|
| D[7:0] | Roll axis (Y) angular rate value (LSbyte) |
|--------|---|

9.31 OUTY_H_G (25h)

Angular rate sensor roll axis (Y) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r).

Table 92. OUTY_H_G register

| | | | | | | | |
|-----|-----|-----|-----|-----|-----|----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|

Table 93. OUTY_H_G register description

| | |
|---------|---|
| D[15:8] | Roll axis (Y) angular rate value (MSbyte) |
|---------|---|

9.32 OUTZ_L_G (26h)

Angular rate sensor yaw axis (Z) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r).

Table 94. OUTZ_L_G register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Table 95. OUTZ_L_G register description

| | |
|--------|--|
| D[7:0] | Yaw axis (Z) angular rate value (LSbyte) |
|--------|--|

9.33 OUTZ_H_G (27h)

Angular rate sensor Yaw axis (Z) angular rate output register (r). The value is expressed as a 16-bit word in two's complement.

Table 96. OUTZ_H_G register

| | | | | | | | |
|-----|-----|-----|-----|-----|-----|----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|

Table 97. OUTZ_H_G register description

| | |
|---------|--|
| D[15:8] | Yaw axis (Z) angular rate value (MSbyte) |
|---------|--|

9.34 OUTX_L_XL (28h)

Linear acceleration sensor X-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 98. OUTX_L_XL register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Table 99. OUTX_L_XL register description

| | |
|--------|---|
| D[7:0] | X-axis linear acceleration value (LSbyte) |
|--------|---|

9.35 OUTX_H_XL (29h)

Linear acceleration sensor X-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 100. OUTX_H_XL register

| | | | | | | | |
|-----|-----|-----|-----|-----|-----|----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|

Table 101. OUTX_H_XL register description

| | |
|---------|---|
| D[15:8] | X-axis linear acceleration value (MSbyte) |
|---------|---|

9.36 OUTY_L_XL (2Ah)

Linear acceleration sensor Y-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 102. OUTY_L_XL register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Table 103. OUTY_L_XL register description

| | |
|--------|---|
| D[7:0] | Y-axis linear acceleration value (LSbyte) |
|--------|---|

9.37 OUTY_H_XL (2Bh)

Linear acceleration sensor Y-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 104. OUTY_H_G register

| | | | | | | | |
|-----|-----|-----|-----|-----|-----|----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|

Table 105. OUTY_H_G register description

| | |
|---------|---|
| D[15:8] | Y-axis linear acceleration value (MSbyte) |
|---------|---|

9.38 OUTZ_L_XL (2Ch)

Linear acceleration sensor Z-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 106. OUTZ_L_XL register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Table 107. OUTZ_L_XL register description

| | |
|--------|---|
| D[7:0] | Z-axis linear acceleration value (LSbyte) |
|--------|---|

9.39 OUTZ_H_XL (2Dh)

Linear acceleration sensor Z-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 108. OUTZ_H_XL register

| | | | | | | | |
|-----|-----|-----|-----|-----|-----|----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|

Table 109. OUTZ_H_XL register description

| | |
|---------|---|
| D[15:8] | Z-axis linear acceleration value (MSbyte) |
|---------|---|

9.40 SENSORHUB1_REG (2Eh)

First byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 110. SENSORHUB1_REG register

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| SHub1_7 | SHub1_6 | SHub1_5 | SHub1_4 | SHub1_3 | SHub1_2 | SHub1_1 | SHub1_0 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 111. SENSORHUB1_REG register description

| | |
|-------------|---|
| SHub1_[7:0] | First byte associated to external sensors |
|-------------|---|

9.41 SENSORHUB2_REG (2Fh)

Second byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operations configurations (for external sensors from x = 0 to x = 3).

Table 112. SENSORHUB2_REG register

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| SHub2_7 | SHub2_6 | SHub2_5 | SHub2_4 | SHub2_3 | SHub2_2 | SHub2_1 | SHub2_0 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 113. SENSORHUB2_REG register description

| | |
|-------------|--|
| SHub2_[7:0] | Second byte associated to external sensors |
|-------------|--|

9.42 SENSORHUB3_REG (30h)

Third byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operations configurations (for external sensors from x = 0 to x = 3).

Table 114. SENSORHUB3_REG register

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| SHub3_7 | SHub3_6 | SHub3_5 | SHub3_4 | SHub3_3 | SHub3_2 | SHub3_1 | SHub3_0 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 115. SENSORHUB3_REG register description

| | |
|-------------|---|
| SHub3_[7:0] | Third byte associated to external sensors |
|-------------|---|

9.43 SENSORHUB4_REG (31h)

Fourth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 116. SENSORHUB4_REG register

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| SHub4_7 | SHub4_6 | SHub4_5 | SHub4_4 | SHub4_3 | SHub4_2 | SHub4_1 | SHub4_0 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 117. SENSORHUB4_REG register description

| | |
|-------------|--|
| SHub4_[7:0] | Fourth byte associated to external sensors |
|-------------|--|

9.44 SENSORHUB5_REG (32h)

Fifth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 118. SENSORHUB5_REG register

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| SHub5_7 | SHub5_6 | SHub5_5 | SHub5_4 | SHub5_3 | SHub5_2 | SHub5_1 | SHub5_0 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 119. SENSORHUB5_REG register description

| | |
|-------------|---|
| SHub5_[7:0] | Fifth byte associated to external sensors |
|-------------|---|

9.45 SENSORHUB6_REG (33h)

Sixth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 120. SENSORHUB6_REG register

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| SHub6_7 | SHub6_6 | SHub6_5 | SHub6_4 | SHub6_3 | SHub6_2 | SHub6_1 | SHub6_0 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 121. SENSORHUB6_REG register description

| | |
|-------------|---|
| SHub6_[7:0] | Sixth byte associated to external sensors |
|-------------|---|

9.46 SENSORHUB7_REG (34h)

Seventh byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 122. SENSORHUB7_REG register

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| SHub7_7 | SHub7_6 | SHub7_5 | SHub7_4 | SHub7_3 | SHub7_2 | SHub7_1 | SHub7_0 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 123. SENSORHUB7_REG register description

| | |
|-------------|---|
| SHub7_[7:0] | Seventh byte associated to external sensors |
|-------------|---|

9.47 SENSORHUB8_REG(35h)

Eighth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 124. SENSORHUB8_REG register

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| SHub8_7 | SHub8_6 | SHub8_5 | SHub8_4 | SHub8_3 | SHub8_2 | SHub8_1 | SHub8_0 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 125. SENSORHUB8_REG register description

| | |
|-------------|--|
| SHub8_[7:0] | Eighth byte associated to external sensors |
|-------------|--|

9.48 SENSORHUB9_REG (36h)

Ninth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 126. SENSORHUB9_REG register

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| SHub9_7 | SHub9_6 | SHub9_5 | SHub9_4 | SHub9_3 | SHub9_2 | SHub9_1 | SHub9_0 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 127. SENSORHUB9_REG register description

| | |
|-------------|---|
| SHub9_[7:0] | Ninth byte associated to external sensors |
|-------------|---|

9.49 SENSORHUB10_REG (37h)

Tenth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 128. SENSORHUB10_REG register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SHub10_7 | SHub10_6 | SHub10_5 | SHub10_4 | SHub10_3 | SHub10_2 | SHub10_1 | SHub10_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 129. SENSORHUB10_REG register description

| | |
|--------------|---|
| SHub10_[7:0] | Tenth byte associated to external sensors |
|--------------|---|

9.50 SENSORHUB11_REG (38h)

Eleventh byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 130. SENSORHUB11_REG register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SHub11_7 | SHub11_6 | SHub11_5 | SHub11_4 | SHub11_3 | SHub11_2 | SHub11_1 | SHub11_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 131. SENSORHUB11_REG register description

| | |
|--------------|--|
| SHub11_[7:0] | Eleventh byte associated to external sensors |
|--------------|--|

9.51 SENSORHUB12_REG(39h)

Twelfth byte associated to external sensors. The content of the register is consistent with the SLAVE_x_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 132. SENSORHUB12_REG register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SHub12_7 | SHub12_6 | SHub12_5 | SHub12_4 | SHub12_3 | SHub12_2 | SHub12_1 | SHub12_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 133. SENSORHUB12_REG register description

| | |
|-------------|---|
| SHub12[7:0] | Twelfth byte associated to external sensors |
|-------------|---|

9.52 FIFO_STATUS1 (3Ah)

FIFO status control register (r). For a proper reading of the register it is suggested to set BDU bit in [CTRL3_C \(12h\)](#) to 0.

Table 134. FIFO_STATUS1 register

| | | | | | | | |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| DIFF_FIFO_7 | DIFF_FIFO_6 | DIFF_FIFO_5 | DIFF_FIFO_4 | DIFF_FIFO_3 | DIFF_FIFO_2 | DIFF_FIFO_1 | DIFF_FIFO_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 135. FIFO_STATUS1 register description

| | |
|-----------------|--|
| DIFF_FIFO_[7:0] | Number of unread words (16-bit axes) stored in FIFO ⁽¹⁾ . |
|-----------------|--|

1. For a complete number of unread samples, consider DIFF_FIFO [11:8] in [FIFO_STATUS2 \(3Bh\)](#)

9.53 FIFO_STATUS2 (3Bh)

FIFO status control register (r). For a proper reading of the register it is recommended to set the BDU bit in [CTRL3_C \(12h\)](#) to 0.

Table 136. FIFO_STATUS2 register

| | | | | | | | |
|-----|---------------|-----------|------------|--------------|--------------|-------------|-------------|
| FTH | FIFO_OVER_RUN | FIFO_FULL | FIFO_EMPTY | DIFF_FIFO_11 | DIFF_FIFO_10 | DIFF_FIFO_9 | DIFF_FIFO_8 |
|-----|---------------|-----------|------------|--------------|--------------|-------------|-------------|

Table 137. FIFO_STATUS2 register description

| | |
|-----------------|--|
| FTH | FIFO watermark status. Default value: 0 (0: FIFO filling is lower than watermark level ⁽¹⁾ ; 1: FIFO filling is equal to or higher than the watermark level) |
| FIFO_OVER_RUN | FIFO overrun status. Default value: 0 (0: FIFO is not completely filled; 1: FIFO is completely filled) |
| FIFO_FULL | FIFO full status. Default value: 0 (0: FIFO is not full; 1: FIFO will be full at the next ODR) |
| FIFO_EMPTY | FIFO empty bit. Default value: 0 (0: FIFO contains data; 1: FIFO is empty) |
| DIFF_FIFO_[7:0] | Number of unread words (16-bit axes) stored in FIFO ⁽²⁾ . |

1. FIFO watermark level is set in FTH_[11:0] in [FIFO_CTRL1 \(06h\)](#) and [FIFO_CTRL2 \(07h\)](#)
2. For a complete number of unread samples, consider DIFF_FIFO [11:8] in [FIFO_STATUS1 \(3Ah\)](#)

9.54 FIFO_STATUS3 (3Ch)

FIFO status control register (r). For a proper reading of the register it is recommended to set the BDU bit in [CTRL3_C \(12h\)](#) to 0.

Table 138. FIFO_STATUS3 register

| FIFO_PATTERN_7 | FIFO_PATTERN_6 | FIFO_PATTERN_5 | FIFO_PATTERN_4 | FIFO_PATTERN_3 | FIFO_PATTERN_2 | FIFO_PATTERN_1 | FIFO_PATTERN_0 |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|

Table 139. FIFO_STATUS3 register description

| | |
|--------------------|---|
| FIFO_PATTERN_[7:0] | Word of recursive pattern read at the next reading. |
|--------------------|---|

9.55 FIFO_STATUS4 (3Dh)

FIFO status control register (r). For a proper reading of the register it is recommended to set the BDU bit in [CTRL3_C \(12h\)](#) to 0.

Table 140. FIFO_STATUS4 register

| | | | | | | | |
|------------------|------------------|------------------|------------------|------------------|------------------|----------------|----------------|
| 0 ⁽¹⁾ | FIFO_PATTERN_9 | FIFO_PATTERN_8 |
|------------------|------------------|------------------|------------------|------------------|------------------|----------------|----------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 141. FIFO_STATUS4 register description

| | |
|--------------------|---|
| FIFO_PATTERN_[9:8] | Word of recursive pattern read at the next reading. |
|--------------------|---|

9.56 FIFO_DATA_OUT_L (3Eh)

FIFO data output register (r). For a proper reading of the register it is recommended to set the BDU bit in [CTRL3_C \(12h\)](#) to 0.

Table 142. FIFO_DATA_OUT_L register

| DATA_OUT_FIFO_L_7 | DATA_OUT_FIFO_L_6 | DATA_OUT_FIFO_L_5 | DATA_OUT_FIFO_L_4 | DATA_OUT_FIFO_L_3 | DATA_OUT_FIFO_L_2 | DATA_OUT_FIFO_L_1 | DATA_OUT_FIFO_L_0 |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|

Table 143. FIFO_DATA_OUT_L register description

| | |
|-----------------------|-------------------------------|
| DATA_OUT_FIFO_L_[7:0] | FIFO data output (first byte) |
|-----------------------|-------------------------------|

9.57 FIFO_DATA_OUT_H (3Fh)

FIFO data output register (r). For a proper reading of the register it is suggested to set BDU bit in [CTRL3_C \(12h\)](#) to 0.

Table 144. FIFO_DATA_OUT_H register

| | | | | | | | |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| DATA_OUT_FIFO_H_7 | DATA_OUT_FIFO_H_6 | DATA_OUT_FIFO_H_5 | DATA_OUT_FIFO_H_4 | DATA_OUT_FIFO_H_3 | DATA_OUT_FIFO_H_2 | DATA_OUT_FIFO_H_1 | DATA_OUT_FIFO_H_0 |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|

Table 145. FIFO_DATA_OUT_H register description

| | |
|-----------------------|--------------------------------|
| DATA_OUT_FIFO_H_[7:0] | FIFO data output (second byte) |
|-----------------------|--------------------------------|

9.58 **TIMESTAMP0_REG (40h)**

Time stamp first byte data output register (r). The value is expressed as a 24-bit word and the bit resolution is defined by setting the value in [WAKE_UP_DUR \(5Ch\)](#).

Table 146. TIMESTAMP0_REG register

| | | | | | | | |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| TIMESTA_MP0_7 | TIMESTA_MP0_6 | TIMESTA_MP0_5 | TIMESTA_MP0_4 | TIMESTA_MP0_3 | TIMESTA_MP0_2 | TIMESTA_MP0_1 | TIMESTA_MP0_0 |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|

Table 147. TIMESTAMP0_REG register description

| | |
|------------------|----------------------------------|
| TIMESTAMP0_[7:0] | TIMESTAMP first byte data output |
|------------------|----------------------------------|

9.59 **TIMESTAMP1_REG (41h)**

Time stamp second byte data output register (r). The value is expressed as a 24-bit word and the bit resolution is defined by setting value in [WAKE_UP_DUR \(5Ch\)](#).

Table 148. TIMESTAMP1_REG register

| | | | | | | | |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| TIMESTA_MP1_7 | TIMESTA_MP1_6 | TIMESTA_MP1_5 | TIMESTA_MP1_4 | TIMESTA_MP1_3 | TIMESTA_MP1_2 | TIMESTA_MP1_1 | TIMESTA_MP1_0 |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|

Table 149. TIMESTAMP1_REG register description

| | |
|------------------|-----------------------------------|
| TIMESTAMP1_[7:0] | TIMESTAMP second byte data output |
|------------------|-----------------------------------|

9.60 **TIMESTAMP2_REG (42h)**

Time stamp third byte data output register (r/w). The value is expressed as a 24-bit word and the bit resolution is defined by setting the value in [WAKE_UP_DUR \(5Ch\)](#). To reset the timer, the AAh value has to be stored in this register.

Table 150. TIMESTAMP2_REG register

| | | | | | | | |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| TIMESTA_MP2_7 | TIMESTA_MP2_6 | TIMESTA_MP2_5 | TIMESTA_MP2_4 | TIMESTA_MP2_3 | TIMESTA_MP2_2 | TIMESTA_MP2_1 | TIMESTA_MP2_0 |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|

Table 151. TIMESTAMP2_REG register description

| | |
|------------------|----------------------------------|
| TIMESTAMP2_[7:0] | TIMESTAMP third byte data output |
|------------------|----------------------------------|

9.61 STEP_TIMESTAMP_L (49h)

Step counter timestamp information register (r). When a step is detected, the value of TIMESTAMP_REG1 register is copied in STEP_TIMESTAMP_L.

Table 152. STEP_TIMESTAMP_L register

| STEP_TIMESTAMP_MP_L_7 | STEP_TIMESTAMP_MP_L_6 | STEP_TIMESTAMP_MP_L_5 | STEP_TIMESTAMP_MP_L_4 | STEP_TIMESTAMP_MP_L_3 | STEP_TIMESTAMP_MP_L_2 | STEP_TIMESTAMP_MP_L_1 | STEP_TIMESTAMP_MP_L_0 |
|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|

Table 153. STEP_TIMESTAMP_L register description

| | |
|-----------------------|----------------------------------|
| STEP_TIMESTAMP_L[7:0] | Timestamp of last step detected. |
|-----------------------|----------------------------------|

9.62 STEP_TIMESTAMP_H (4Ah)

Step counter timestamp information register (r). When a step is detected, the value of TIMESTAMP_REG2 register is copied in STEP_TIMESTAMP_H.

Table 154. STEP_TIMESTAMP_H register

| STEP_TIMESTAMP_MP_H_7 | STEP_TIMESTAMP_MP_H_6 | STEP_TIMESTAMP_MP_H_5 | STEP_TIMESTAMP_MP_H_4 | STEP_TIMESTAMP_MP_H_3 | STEP_TIMESTAMP_MP_H_2 | STEP_TIMESTAMP_MP_H_1 | STEP_TIMESTAMP_MP_H_0 |
|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|

Table 155. STEP_TIMESTAMP_H register description

| | |
|-----------------------|----------------------------------|
| STEP_TIMESTAMP_H[7:0] | Timestamp of last step detected. |
|-----------------------|----------------------------------|

9.63 STEP_COUNTER_L (4Bh)

Step counter output register (r).

Table 156. STEP_COUNTER_L register

| STEP_CO_UNTER_L_7 | STEP_CO_UNTER_L_6 | STEP_CO_UNTER_L_5 | STEP_CO_UNTER_L_4 | STEP_CO_UNTER_L_3 | STEP_CO_UNTER_L_2 | STEP_CO_UNTER_L_1 | STEP_CO_UNTER_L_0 |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|

Table 157. STEP_COUNTER_L register description

| | |
|----------------------|------------------------------|
| STEP_COUNTER_L_[7:0] | Step counter output (LSbyte) |
|----------------------|------------------------------|

9.64 STEP_COUNTER_H (4Ch)

Step counter output register (r).

Table 158. STEP_COUNTER_H register

| STEP_CO_UNTER_H_7 | STEP_CO_UNTER_H_6 | STEP_CO_UNTER_H_5 | STEP_CO_UNTER_H_4 | STEP_CO_UNTER_H_3 | STEP_CO_UNTER_H_2 | STEP_CO_UNTER_H_1 | STEP_CO_UNTER_H_0 |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|

Table 159. STEP_COUNTER_H register description

| | |
|----------------------|------------------------------|
| STEP_COUNTER_H_[7:0] | Step counter output (MSbyte) |
|----------------------|------------------------------|

9.65 SENSORHUB13_REG (4Dh)

Thirteenth byte associated to external sensors. The content of the register is consistent with the SLAVE_x_CONFIG number of read operation configurations (for external sensors from $x = 0$ to $x = 3$).

Table 160. SENSORHUB13_REG register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SHub13_7 | SHub13_6 | SHub13_5 | SHub13_4 | SHub13_3 | SHub13_2 | SHub13_1 | SHub13_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 161. SENSORHUB13_REG register description

| | |
|--------------|--|
| SHub13_[7:0] | Thirteenth byte associated to external sensors |
|--------------|--|

9.66 SENSORHUB14_REG (4Eh)

Fourteenth byte associated to external sensors. The content of the register is consistent with the SLAVE_x_CONFIG number of read operation configurations (for external sensors from $x = 0$ to $x = 3$).

Table 162. SENSORHUB14_REG register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SHub14_7 | SHub14_6 | SHub14_5 | SHub14_4 | SHub14_3 | SHub14_2 | SHub14_1 | SHub14_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 163. SENSORHUB14_REG register description

| | |
|--------------|--|
| SHub14_[7:0] | Fourteenth byte associated to external sensors |
|--------------|--|

9.67 SENSORHUB15_REG (4Fh)

Fifteenth byte associated to external sensors. The content of the register is consistent with the SLAVE_x_CONFIG number of read operation configurations (for external sensors from $x = 0$ to $x = 3$).

Table 164. SENSORHUB15_REG register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SHub15_7 | SHub15_6 | SHub15_5 | SHub15_4 | SHub15_3 | SHub15_2 | SHub15_1 | SHub15_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 165. SENSORHUB15_REG register description

| | |
|--------------|---|
| SHub15_[7:0] | Fifteenth byte associated to external sensors |
|--------------|---|

9.68 SENSORHUB16_REG (50h)

Sixteenth byte associated to external sensors. The content of the register is consistent with the SLAVE_x_CONFIG number of read operation configurations (for external sensors from $x = 0$ to $x = 3$).

Table 166. SENSORHUB16_REG register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SHub16_7 | SHub16_6 | SHub16_5 | SHub16_4 | SHub16_3 | SHub16_2 | SHub16_1 | SHub16_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 167. SENSORHUB16_REG register description

| | |
|--------------|---|
| SHub16_[7:0] | Sixteenth byte associated to external sensors |
|--------------|---|

9.69 SENSORHUB17_REG (51h)

Seventeenth byte associated to external sensors. The content of the register is consistent with the SLAVE_x_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 168. SENSORHUB17_REG register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SHub17_7 | SHub17_6 | SHub17_5 | SHub17_4 | SHub17_3 | SHub17_2 | SHub17_1 | SHub17_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 169. SENSORHUB17_REG register description

| | |
|--------------|---|
| SHub17_[7:0] | Seventeenth byte associated to external sensors |
|--------------|---|

9.70 SENSORHUB18_REG (52h)

Eighteenth byte associated to external sensors. The content of the register is consistent with the SLAVE_x_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 170. SENSORHUB18_REG register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SHub18_7 | SHub18_6 | SHub18_5 | SHub18_4 | SHub18_3 | SHub18_2 | SHub18_1 | SHub18_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 171. SENSORHUB18_REG register description

| | |
|--------------|--|
| SHub18_[7:0] | Eighteenth byte associated to external sensors |
|--------------|--|

9.71 FUNC_SRC (53h)

Significant motion, tilt, step detector, hard/soft-iron and sensor hub interrupt source register (r).

Table 172. FUNC_SRC register

| STEP_COUNT_DELTA_IA | SIGN_MOTION_IA | TILT_IA | STEP_DETECTED | STEP_OVERFLOW | 0 ⁽¹⁾ | SI_END_OP | SENSOR_HUB_END_OP |
|---------------------|----------------|---------|---------------|---------------|------------------|-----------|-------------------|
|---------------------|----------------|---------|---------------|---------------|------------------|-----------|-------------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 173. FUNC_SRC register description

| | |
|---------------------|---|
| STEP_COUNT_DELTA_IA | Pedometer step recognition on delta time status. Default value: 0 (0: no step recognized during delta time; 1: at least one step recognized during delta time) |
| SIGN_MOTION_IA | Significant motion event detection status. Default value: 0 (0: significant motion event not detected; 1: significant motion event detected) |
| TILT_IA | Tilt event detection status. Default value: 0 (0: tilt event not detected; 1: tilt event detected) |
| STEP_DETECTED | Step detector event detection status. Default value: 0 (0: step detector event not detected; 1: step detector event detected) |
| STEP_OVERFLOW | Step counter overflow status. Default value: 0 (0: step counter value < 2 ¹⁶ ; 1: step counter value reached 2 ¹⁶) |
| SI_END_OP | Hard/soft-iron calculation status. Default value: 0 (0: Hard/soft-iron calculation not concluded; 1: Hard/soft-iron calculation concluded) |
| SENSORHUB_END_OP | Sensor hub communication status. Default value: 0 (0: sensor hub communication not concluded; 1: sensor hub communication concluded) |

9.72 TAP_CFG (58h)

Time stamp, pedometer, tilt, filtering, and tap recognition functions configuration register (r/w).

Table 174. TAP_CFG register

| TIMER_EN | PEDO_EN | TILT_EN | SLOPE_FDS | TAP_X_EN | TAP_Y_EN | TAP_Z_EN | LIR |
|----------|---------|---------|-----------|----------|----------|----------|-----|
|----------|---------|---------|-----------|----------|----------|----------|-----|

Table 175. TAP_CFG register description

| | |
|-----------|--|
| TIMER_EN | Time stamp count enable, output data are collected in TIMESTAMP0_REG (40h) , TIMESTAMP1_REG (41h) , TIMESTAMP2_REG (42h) register. Default: 0 (0: time stamp count disabled; 1: time stamp count enabled) |
| PEDO_EN | Pedometer algorithm enable. Default value: 0 (0: pedometer algorithm disabled; 1: pedometer algorithm enabled) |
| TILT_EN | Tilt calculation enable. Default value: 0 (0: tilt calculation disabled; 1: tilt calculation enabled.) |
| SLOPE_FDS | Enable accelerometer HP and LPF2 filters (refer to Figure 5). Default value: 0 (0: disable; 1: enable) |
| TAP_X_EN | Enable X direction in tap recognition. Default value: 0 (0: X direction disabled; 1:X direction enabled) |
| TAP_Y_EN | Enable Y direction in tap recognition. Default value: 0 (0: Y direction disabled; 1:Y direction enabled) |
| TAP_Z_EN | Enable Z direction in tap recognition. Default value: 0 (0: Z direction disabled; 1:Z direction enabled) |
| LIR | Latched Interrupt. Default value: 0 (0: interrupt request not latched; 1: interrupt request latched) |

9.73 TAP_THS_6D (59h)

Portrait/landscape position and tap function threshold register (r/w).

Table 176. TAP_THS_6D register

| D4D_EN | SIXD_THS_1 | SIXD_THS_0 | TAP_THS_4 | TAP_THS_3 | TAP_THS_2 | TAP_THS_1 | TAP_THS_0 |
|--------|------------|------------|-----------|-----------|-----------|-----------|-----------|
|--------|------------|------------|-----------|-----------|-----------|-----------|-----------|

Table 177. TAP_THS_6D register description

| | |
|---------------|--|
| D4D_EN | 4D orientation detection enable. Z-axis position detection is disabled. Default value: 0 (0: enabled; 1: disabled) |
| SIXD_THS[1:0] | Threshold for D6D function. Default value: 00 For details, refer to Table 178 . |
| TAP_THS[4:0] | Threshold for tap recognition. Default value: 00000 |

Table 178. Threshold for D4D/D6D function

| SIXD_THS[1:0] | Threshold value |
|---------------|-----------------|
| 00 | 80 degrees |
| 01 | 70 degrees |
| 10 | 60 degrees |
| 11 | 50 degrees |

9.74 INT_DUR2 (5Ah)

Tap recognition function setting register (r/w).

Table 179. INT_DUR2 register

| DUR3 | DUR2 | DUR1 | DUR0 | QUIET1 | QUIET0 | SHOCK1 | SHOCK0 |
|------|------|------|------|--------|--------|--------|--------|
| | | | | | | | |

Table 180. INT_DUR2 register description

| | |
|------------|--|
| DUR[3:0] | Duration of maximum time gap for double tap recognition. Default: 0000 When double tap recognition is enabled, this register expresses the maximum time between two consecutive detected taps to determine a double tap event. The default value of these bits is 0000b which corresponds to 16*ODR_XL time. If the DUR[3:0] bits are set to a different value, 1LSB corresponds to 32*ODR_XL time. |
| QUIET[1:0] | Expected quiet time after a tap detection. Default value: 00 Quiet time is the time after the first detected tap in which there must not be any overthreshold event. The default value of these bits is 00b which corresponds to 2*ODR_XL time. If the QUIET[1:0] bits are set to a different value, 1LSB corresponds to 4*ODR_XL time. |
| SHOCK[1:0] | Maximum duration of overthreshold event. Default value: 00 Maximum duration is the maximum time of an overthreshold signal detection to be recognized as a tap event. The default value of these bits is 00b which corresponds to 4*ODR_XL time. If the SHOCK[1:0] bits are set to a different value, 1LSB corresponds to 8*ODR_XL time. |

9.75 WAKE_UP_THS (5Bh)

Single and double-tap function threshold register (r/w).

Table 181. WAKE_UP_THS register

| SINGLE_DOUBLE_TAP | INACTIVITY | WK_THS5 | WK_THS4 | WK_THS3 | WK_THS2 | WK_THS1 | WK_THS0 |
|-------------------|------------|---------|---------|---------|---------|---------|---------|
| | | | | | | | |

Table 182. WAKE_UP_THS register description

| | |
|-------------------|---|
| SINGLE_DOUBLE_TAP | Single/double-tap event enable. Default: 0 (0: only single-tap event enabled; 1: both single and double-tap events enabled) |
| INACTIVITY | Inactivity event enable. Default value: 0 (0: sleep disabled; 1: sleep enabled) |
| WK_THS[5:0] | Threshold for wakeup. Default value: 000000 |

9.76 WAKE_UP_DUR (5Ch)

Free-fall, wakeup, time stamp and sleep mode functions duration setting register (r/w).

Table 183. WAKE_UP_DUR register

| FF_DUR5 | WAKE_DUR1 | WAKE_DUR0 | TIMER_HR | SLEEP_DUR3 | SLEEP_DUR2 | SLEEP_DUR1 | SLEEP_DUR0 |
|---------|-----------|-----------|----------|------------|------------|------------|------------|
|---------|-----------|-----------|----------|------------|------------|------------|------------|

Table 184. WAKE_UP_DUR register description

| | |
|----------------|--|
| FF_DUR5 | Free fall duration event. Default: 0 For the complete configuration of the free-fall duration, refer to FF_DUR[4:0] in FREE_FALL (5Dh) configuration. |
| WAKE_DUR[1:0] | Wake up duration event. Default: 00 1LSB = 1 ODR_time |
| TIMER_HR | Time stamp register resolution setting ⁽¹⁾ . Default value: 0 (0: 1LSB = 6.4 ms; 1: 1LSB = 25 µs) |
| SLEEP_DUR[3:0] | Duration to go in sleep mode. Default value: 0000 1 LSB = 512 ODR |

1. Configuration of this bit affects [TIMESTAMP0_REG \(40h\)](#), [TIMESTAMP1_REG \(41h\)](#), [TIMESTAMP2_REG \(42h\)](#), [STEP_TIMESTAMP_L \(49h\)](#), [STEP_TIMESTAMP_H \(4Ah\)](#), and [STEP_COUNT_DELTA \(15h\)](#) registers.

9.77 FREE_FALL (5Dh)

Free-fall function duration setting register (r/w).

Table 185. FREE_FALL register

| FF_DUR4 | FF_DUR3 | FF_DUR2 | FF_DUR1 | FF_DUR0 | FF_THS2 | FF_THS1 | FF_THS0 |
|---------|---------|---------|---------|---------|---------|---------|---------|
|---------|---------|---------|---------|---------|---------|---------|---------|

Table 186. FREE_FALL register description

| | |
|-------------|---|
| FF_DUR[4:0] | Free-fall duration event. Default: 0 For the complete configuration of the free fall duration, refer to FF_DUR5 in WAKE_UP_DUR (5Ch) configuration |
| FF_THS[2:0] | Free fall threshold setting. Default: 000 For details refer to Table 187 . |

Table 187. Threshold for free-fall function

| FF_THS[2:0] | Threshold value |
|-------------|-----------------|
| 000 | 156 mg |
| 001 | 219 mg |
| 010 | 250 mg |
| 011 | 312 mg |
| 100 | 344 mg |
| 101 | 406 mg |
| 110 | 469 mg |
| 111 | 500 mg |

9.78 MD1_CFG (5Eh)

Functions routing on INT1 register (r/w).

Table 188. MD1_CFG register

| INT1_INACT_STATE | INT1_SINGLE_TAP | INT1_WU | INT1_FF | INT1_DOUBLE_TAP | INT1_6D | INT1_TILT | INT1_TIMER |
|------------------|-----------------|---------|---------|-----------------|---------|-----------|------------|
| | | | | | | | |

Table 189. MD1_CFG register description

| | |
|------------------|---|
| INT1_INACT_STATE | Routing on INT1 of inactivity mode. Default: 0 (0: routing on INT1 of inactivity disabled; 1: routing on INT1 of inactivity enabled) |
| INT1_SINGLE_TAP | Single-tap recognition routing on INT1. Default: 0 (0: routing of single-tap event on INT1 disabled; 1: routing of single-tap event on INT1 enabled) |
| INT1_WU | Routing of wakeup event on INT1. Default value: 0 (0: routing of wakeup event on INT1 disabled; 1: routing of wakeup event on INT1 enabled) |
| INT1_FF | Routing of free-fall event on INT1. Default value: 0 (0: routing of free-fall event on INT1 disabled; 1: routing of free-fall event on INT1 enabled) |
| INT1_DOUBLE_TAP | Routing of tap event on INT1. Default value: 0 (0: routing of double-tap event on INT1 disabled; 1: routing of double-tap event on INT1 enabled) |
| INT1_6D | Routing of 6D event on INT1. Default value: 0 (0: routing of 6D event on INT1 disabled; 1: routing of 6D event on INT1 enabled) |
| INT1_TILT | Routing of tilt event on INT1. Default value: 0 (0: routing of tilt event on INT1 disabled; 1: routing of tilt event on INT1 enabled) |
| INT1_TIMER | Routing of end counter event of timer on INT1. Default value: 0 (0: routing of end counter event of timer on INT1 disabled; 1: routing of end counter event of timer event on INT1 enabled) |

9.79 MD2_CFG (5Fh)

Functions routing on INT2 register (r/w).

Table 190. MD2_CFG register

| INT2_INACT_STATE | INT2_SINGLE_TAP | INT2_WU | INT2_FF | INT2_DOUBLE_TAP | INT2_6D | INT2_TILT | INT2_IRON |
|------------------|-----------------|---------|---------|-----------------|---------|-----------|-----------|
|------------------|-----------------|---------|---------|-----------------|---------|-----------|-----------|

Table 191. MD2_CFG register description

| | |
|------------------|--|
| INT2_INACT_STATE | Routing on INT2 of inactivity mode. Default: 0 (0: routing on INT2 of inactivity disabled; 1: routing on INT2 of inactivity enabled) |
| INT2_SINGLE_TAP | Single-tap recognition routing on INT2. Default: 0 (0: routing of single-tap event on INT2 disabled; 1: routing of single-tap event on INT2 enabled) |
| INT2_WU | Routing of wakeup event on INT2. Default value: 0 (0: routing of wakeup event on INT2 disabled; 1: routing of wake-up event on INT2 enabled) |
| INT2_FF | Routing of free-fall event on INT2. Default value: 0 (0: routing of free-fall event on INT2 disabled; 1: routing of free-fall event on INT2 enabled) |
| INT2_DOUBLE_TAP | Routing of tap event on INT2. Default value: 0 (0: routing of double-tap event on INT2 disabled; 1: routing of double-tap event on INT2 enabled) |
| INT2_6D | Routing of 6D event on INT2. Default value: 0 (0: routing of 6D event on INT2 disabled; 1: routing of 6D event on INT2 enabled) |
| INT2_TILT | Routing of tilt event on INT2. Default value: 0 (0: routing of tilt event on INT2 disabled; 1: routing of tilt event on INT2 enabled) |
| INT2_IRON | Routing of soft-iron/hard-iron algorithm end event on INT2. Default value: 0 (0: routing of soft-iron/hard-iron algorithm end event on INT2 disabled; 1: routing of soft-iron/hard-iron algorithm end event on INT2 enabled) |

9.80 OUT_MAG_RAW_X_L (66h)

External magnetometer raw data (r).

Table 192. OUT_MAG_RAW_X_L register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Table 193. OUT_MAG_RAW_X_L register description

| | |
|--------|---|
| D[7:0] | X-axis external magnetometer value (LSbyte) |
|--------|---|

9.81 OUT_MAG_RAW_X_H (67h)

External magnetometer raw data (r).

Table 194. OUT_MAG_RAW_X_H register

| | | | | | | | |
|-----|-----|-----|-----|-----|-----|----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|

Table 195. OUT_MAG_RAW_X_H register description

| | |
|---------|---|
| D[15:8] | X-axis external magnetometer value (MSbyte) |
|---------|---|

9.82 OUT_MAG_RAW_Y_L (68h)

External magnetometer raw data (r).

Table 196. OUT_MAG_RAW_Y_L register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Table 197. OUT_MAG_RAW_Y_L register description

| | |
|--------|---|
| D[7:0] | Y-axis external magnetometer value (LSbyte) |
|--------|---|

9.83 OUT_MAG_RAW_Y_H (69h)

External magnetometer raw data (r).

Table 198. OUT_MAG_RAW_Y_H register

| | | | | | | | |
|-----|-----|-----|-----|-----|-----|----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|

Table 199. OUT_MAG_RAW_Y_H register description

| | |
|---------|---|
| D[15:8] | Y-axis external magnetometer value (MSbyte) |
|---------|---|

9.84 OUT_MAG_RAW_Z_L (6Ah)

External magnetometer raw data (r).

Table 200. OUT_MAG_RAW_Z_L register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Table 201. OUT_MAG_RAW_Z_L register description

| | |
|--------|---|
| D[7:0] | Z-axis external magnetometer value (LSbyte) |
|--------|---|

9.85 OUT_MAG_RAW_Z_H (6Bh)

External magnetometer raw data (r).

Table 202. OUT_MAG_RAW_Z_H register

| | | | | | | | |
|-----|-----|-----|-----|-----|-----|----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|

Table 203. OUT_MAG_RAW_Z_H register description

| | |
|---------|---|
| D[15:8] | Z-axis external magnetometer value (MSbyte) |
|---------|---|

10 Embedded functions register mapping

The table given below provides a list of the registers for the embedded functions available in the device and the corresponding addresses. Embedded functions registers are accessible when FUNC_CFG_EN is set to '1' in *FUNC_CFG_ACCESS (01h)*.

Table 204. Registers address map - embedded functions

| Name | Type | Register address | | Default | Comment |
|-----------------------------|------|------------------|-----------|----------|----------|
| | | Hex | Binary | | |
| SLV0_ADD | r/w | 02 | 00000010 | 00000000 | |
| SLV0_SUBADD | r/w | 03 | 00000011 | 00000000 | |
| SLAVE0_CONFIG | r/w | 04 | 00000100 | 00000000 | |
| SLV1_ADD | r/w | 05 | 00000101 | 00000000 | |
| SLV1_SUBADD | r/w | 06 | 00000110 | 00000000 | |
| SLAVE1_CONFIG | r/w | 07 | 00000111 | 00000000 | |
| SLV2_ADD | r/w | 08 | 00001000 | 00000000 | |
| SLV2_SUBADD | r/w | 09 | 00001001 | 00000000 | |
| SLAVE2_CONFIG | r/w | 0A | 00001010 | 00000000 | |
| SLV3_ADD | r/w | 0B | 00001011 | 00000000 | |
| SLV3_SUBADD | r/w | 0C | 00001100 | 00000000 | |
| SLAVE3_CONFIG | r/w | 0D | 00001101 | 00000000 | |
| DATAWRITE_SRC_MODE_SUB_SLV0 | r/w | 0E | 00001110 | 00000000 | |
| RESERVED | r/w | 0F-12 | | | Reserved |
| SM_THS | r/w | 13 | 00010011 | 00000110 | |
| RESERVED | r/w | 14 | | | Reserved |
| STEP_COUNT_DELTA | r/w | 15 | 0001 0101 | 00000000 | |
| MAG_SI_XX | r/w | 24 | 00100100 | 00001000 | |
| MAG_SI_XY | r/w | 25 | 00100101 | 00000000 | |
| MAG_SI_XZ | r/w | 26 | 00100110 | 00000000 | |
| MAG_SI_YX | r/w | 27 | 00100111 | 00000000 | |
| MAG_SI_YY | r/w | 28 | 00101000 | 00001000 | |
| MAG_SI_YZ | r/w | 29 | 00101001 | 00000000 | |
| MAG_SI_ZX | r/w | 2A | 00101010 | 00000000 | |
| MAG_SI_ZY | r/w | 2B | 00101011 | 00000000 | |
| MAG_SI_ZZ | r/w | 2C | 00101100 | 00001000 | |
| MAG_OFFSET_X_L | r/w | 2D | 00101101 | 00000000 | |

Table 204. Registers address map - embedded functions (continued)

| Name | Type | Register address | | Default | Comment |
|------------|------|------------------|----------|----------|---------|
| | | Hex | Binary | | |
| MAG_OFFX_H | r/w | 2E | 00101110 | 00000000 | |
| MAG_OFFY_L | r/w | 2F | 00101111 | 00000000 | |
| MAG_OFFY_H | r/w | 30 | 00110000 | 00000000 | |
| MAG_OFFZ_L | r/w | 31 | 00110001 | 00000000 | |
| MAG_OFFZ_H | r/w | 32 | 00110010 | 00000000 | |

Registers marked as *Reserved* must not be changed. Writing to those registers may cause permanent damage to the device.

The content of the registers that are loaded at boot should not be changed. They contain the factory calibration values. Their content is automatically restored when the device is powered up.

11 Embedded functions registers description

11.1 SLV0_ADD (02h)

I²C slave address of the first external sensor (Sensor1) register (r/w).

Table 205. SLV0_ADD register

| Slave0_add6 | Slave0_add5 | Slave0_add4 | Slave0_add3 | Slave0_add2 | Slave0_add1 | Slave0_add0 | rw_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------|

Table 206. SLV0_ADD register description

| | |
|-----------------|---|
| Slave0_add[6:0] | I ² C slave address of Sensor1 that can be read by sensor hub. Default value: 0000000 |
| rw_0 | Read/write operation on Sensor1. Default value: 0 (0: write operation; 1: read operation) |

11.2 SLV0_SUBADD (03h)

Address of register on the first external sensor (Sensor1) register (r/w).

Table 207. SLV0_SUBADD register

| Slave0_reg7 | Slave0_reg6 | Slave0_reg5 | Slave0_reg4 | Slave0_reg3 | Slave0_reg2 | Slave0_reg1 | Slave0_reg0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 208. SLV0_SUBADD register description

| | |
|-----------------|---|
| Slave0_reg[7:0] | Address of register on Sensor1 that has to be read/write according to the rw_0 bit value in SLV0_ADD (02h) . Default value: 0000000 |
|-----------------|---|

11.3 SLAVE0_CONFIG (04h)

First external sensor (Sensor1) configuration and sensor hub settings register (r/w).

Table 209. SLAVE0_CONFIG register

| Slave0_rate1 | Slave0_rate0 | Aux_sens_on1 | Aux_sens_on0 | Src_mode | Slave0_numop2 | Slave0_numop1 | Slave0_numop0 |
|--------------|--------------|--------------|--------------|----------|---------------|---------------|---------------|
|--------------|--------------|--------------|--------------|----------|---------------|---------------|---------------|

Table 210. SLAVE0_CONFIG register description

| | |
|-------------------|---|
| Slave0_rate[1:0] | Decimation of read operation on Sensor1 starting from the sensor hub trigger. Default value: 00 (00: no decimation 01: update every 2 samples 10: update every 4 samples 11: update every 8 samples) |
| Aux_sens_on[1:0] | Number of external sensors to be read by sensor hub. Default value: 00 (00: one sensor 01: two sensors 10: three sensors 11: four sensors) |
| Src_mode | Source mode conditioned read ⁽¹⁾ . Default value: 0 (0: source mode read disabled; 1: source mode read enabled) |
| Slave0_numop[2:0] | Number of read operations on Sensor1. |

1. Read conditioned by the content of the register at address specified in [DATAWRITE_SRC_MODE_SUB_SLV0 \(0Eh\)](#) register. If the content is non-zero the operation continues with the reading of the address specified in the [SLV0_SUBADD \(03h\)](#) register, else the operation is interrupted.

11.4 SLV1_ADD (05h)

I²C slave address of the second external sensor (Sensor2) register (r/w).

Table 211. SLV1_ADD register

| Slave1_add6 | Slave1_add5 | Slave1_add4 | Slave1_add3 | Slave1_add2 | Slave1_add1 | Slave1_add0 | r_1 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----|

Table 212. SLV1_ADD register description

| | |
|-----------------|---|
| Slave1_add[6:0] | I ² C slave address of Sensor2 that can be read by sensor hub. Default value: 0000000 |
| r_1 | Read operation on Sensor2 enable. Default value: 0 (0: read operation disabled; 1: read operation enabled) |

11.5 SLV1_SUBADD (06h)

Address of register on the second external sensor (Sensor2) register (r/w).

Table 213. SLV1_SUBADD register

| Slave1_reg7 | Slave1_reg6 | Slave1_reg5 | Slave1_reg4 | Slave1_reg3 | Slave1_reg2 | Slave1_reg1 | Slave1_reg0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 214. SLV1_SUBADD register description

| | |
|-----------------|---|
| Slave1_reg[7:0] | Address of register on Sensor2 that has to be read according to the r_1 bit value in SLV1_ADD (05h) . Default value: 00000000 |
|-----------------|---|

11.6 SLAVE1_CONFIG (07h)

Second external sensor (Sensor2) configuration register (r/w).

Table 215. SLAVE1_CONFIG register

| | | | | | | | |
|--------------|--------------|------------------|------------------|------------------|---------------|---------------|---------------|
| Slave1_rate1 | Slave1_rate0 | 0 ⁽¹⁾ | 0 ⁽¹⁾ | 0 ⁽¹⁾ | Slave1_numop2 | Slave1_numop1 | Slave1_numop0 |
|--------------|--------------|------------------|------------------|------------------|---------------|---------------|---------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 216. SLAVE1_CONFIG register description

| | |
|-------------------|---|
| Slave1_rate[1:0] | Decimation of read operation on Sensor2 starting from the sensor hub trigger. Default value: 00 (00: no decimation 01: update every 2 samples 10: update every 4 samples 11: update every 8 samples) |
| Slave1_numop[2:0] | Number of read operations on Sensor2. |

11.7 SLV2_ADD (08h)

I²C slave address of the third external sensor (Sensor3) register (r/w).

Table 217. SLV2_ADD register

| | | | | | | | |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----|
| Slave2_add6 | Slave2_add5 | Slave2_add4 | Slave2_add3 | Slave2_add2 | Slave2_add1 | Slave2_add0 | r_2 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----|

Table 218. SLV2_ADD register description

| | |
|-----------------|---|
| Slave2_add[6:0] | I ² C slave address of Sensor3 that can be read by sensor hub. Default value: 0000000 |
| r_2 | Read operation on Sensor3 enable. Default value: 0 (0: read operation disabled; 1: read operation enabled) |

11.8 SLV2_SUBADD (09h)

Address of register on the third external sensor (Sensor3) register (r/w).

Table 219. SLV2_SUBADD register

| | | | | | | | |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Slave2_reg7 | Slave2_reg6 | Slave2_reg5 | Slave2_reg4 | Slave2_reg3 | Slave2_reg2 | Slave2_reg1 | Slave2_reg0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 220. SLV2_SUBADD register description

| | |
|-----------------|--|
| Slave2_reg[7:0] | Address of register on Sensor3 that has to be read according to the r_2 bit value in SLV2_ADD (08h) . Default value: 0000000 |
|-----------------|--|

11.9 SLAVE2_CONFIG (0Ah)

Third external sensor (Sensor3) configuration register (r/w).

Table 221. SLAVE2_CONFIG register

| | | | | | | | |
|--------------|--------------|------------------|------------------|------------------|---------------|---------------|---------------|
| Slave2_rate1 | Slave2_rate0 | 0 ⁽¹⁾ | 0 ⁽¹⁾ | 0 ⁽¹⁾ | Slave2_numop2 | Slave2_numop1 | Slave2_numop0 |
|--------------|--------------|------------------|------------------|------------------|---------------|---------------|---------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 222. SLAVE2_CONFIG register description

| | |
|-------------------|---|
| Slave2_rate[1:0] | Decimation of read operation on Sensor3 starting from the sensor hub trigger. Default value: 00 (00: no decimation 01: update every 2 samples 10: update every 4 samples 11: update every 8 samples) |
| Slave2_numop[2:0] | Number of read operations on Sensor3. |

11.10 SLV3_ADD (0Bh)

I²C slave address of the fourth external sensor (Sensor4) register (r/w).

Table 223. SLV3_ADD register

| | | | | | | | |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----|
| Slave3_add6 | Slave3_add5 | Slave3_add4 | Slave3_add3 | Slave3_add2 | Slave3_add1 | Slave3_add0 | r_3 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----|

Table 224. SLV3_ADD register description

| | |
|-----------------|---|
| Slave3_add[6:0] | I ² C slave address of Sensor4 that can be read by the sensor hub. Default value: 0000000 |
| r_3 | Read operation on Sensor4 enable. Default value: 0 (0: read operation disabled; 1: read operation enabled) |

11.11 SLV3_SUBADD (0Ch)

Address of register on the fourth external sensor (Sensor4) register (r/w).

Table 225. SLV3_SUBADD register

| | | | | | | | |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Slave3_reg7 | Slave3_reg6 | Slave3_reg5 | Slave3_reg4 | Slave3_reg3 | Slave3_reg2 | Slave3_reg1 | Slave3_reg0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 226. SLV3_SUBADD register description

| | |
|-----------------|--|
| Slave3_reg[7:0] | Address of register on Sensor4 that has to be read according to the r_3 bit value in SLV3_ADD (0Bh) . Default value: 0000000 |
|-----------------|--|

11.12 SLAVE3_CONFIG (0Dh)

Fourth external sensor (Sensor4) configuration register (r/w).

Table 227. SLAVE3_CONFIG register

| | | | | | | | |
|--------------|--------------|------------------|------------------|------------------|---------------|---------------|---------------|
| Slave3_rate1 | Slave3_rate0 | 0 ⁽¹⁾ | 0 ⁽¹⁾ | 0 ⁽¹⁾ | Slave3_numop2 | Slave3_numop1 | Slave3_numop0 |
|--------------|--------------|------------------|------------------|------------------|---------------|---------------|---------------|

1. This bit must be set to '0' for the correct operation of the device.

Table 228. SLAVE3_CONFIG register description

| | |
|-------------------|---|
| Slave3_rate[1:0] | Decimation of read operation on Sensor4 starting from the sensor hub trigger. Default value: 00 (00: no decimation 01: update every 2 samples 10: update every 4 samples 11: update every 8 samples) |
| Slave3_numop[2:0] | Number of read operations on Sensor4. |

11.13 DATAWRITE_SRC_MODE_SUB_SLV0 (0Eh)

Data to be written into the slave device register (r/w).

Table 229. DATAWRITE_SRC_MODE_SUB_SLV0 register

| | | | | | | | |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Slave_dataw7 | Slave_dataw6 | Slave_dataw5 | Slave_dataw4 | Slave_dataw3 | Slave_dataw2 | Slave_dataw1 | Slave_dataw0 |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|

Table 230. DATAWRITE_SRC_MODE_SUB_SLV0 register description

| | |
|------------------|--|
| Slave_dataw[7:0] | Data to be written into the slave device according to the rw_0 bit in SLV0_ADD (02h) register or address to be read in source mode. Default value: 00000000 |
|------------------|--|

11.14 SM_THS (13h)

Significant motion configuration register (r/w).

Table 231. SM_THS register

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| SM_THS_7 | SM_THS_6 | SM_THS_5 | SM_THS_4 | SM_THS_3 | SM_THS_2 | SM_THS_1 | SM_THS_0 |
|----------|----------|----------|----------|----------|----------|----------|----------|

Table 232. SM_THS register description

| | |
|-------------|---|
| SM_THS[7:0] | Significant motion threshold. Default value: 00000110 |
|-------------|---|

11.15 STEP_COUNT_DELTA (15h)

Time period register for step detection on delta time (r/w).

Table 233. STEP_COUNT_DELTA register

| SC_DELTA_7 | SC_DELTA_6 | SC_DELTA_5 | SC_DELTA_4 | SC_DELTA_3 | SC_DELTA_2 | SC_DELTA_1 | SC_DELTA_0 |
|------------|------------|------------|------------|------------|------------|------------|------------|
|------------|------------|------------|------------|------------|------------|------------|------------|

Table 234. STEP_COUNT_DELTA register description

| | |
|---------------|--|
| SC_DELTA[7:0] | Time period value ⁽¹⁾ (1LSB = 1.6384 s) |
|---------------|--|

1. This value is effective if the TIMER_EN bit of the TAP_CFG register is set to 1 and the TIMER_HR bit of the WAKE_UP_DUR register is set to 0.

11.16 MAG_SI_XX (24h)

Soft-iron matrix correction register (r/w).

Table 235. MAG_SI_XX register

| MAG_SI_XX_7 | MAG_SI_XX_6 | MAG_SI_XX_5 | MAG_SI_XX_4 | MAG_SI_XX_3 | MAG_SI_XX_2 | MAG_SI_XX_1 | MAG_SI_XX_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 236. MAG_SI_XX register description

| | |
|-----------------|---|
| MAG_SI_XX_[7:0] | Soft-iron correction row1 col1 coefficient ⁽¹⁾ . Default value: 00001000 |
|-----------------|---|

1. Value is expressed in sign-module format.

11.17 MAG_SI_XY (25h)

Soft-iron matrix correction register (r/w).

Table 237. MAG_SI_XY register

| MAG_SI_XY_7 | MAG_SI_XY_6 | MAG_SI_XY_5 | MAG_SI_XY_4 | MAG_SI_XY_3 | MAG_SI_XY_2 | MAG_SI_XY_1 | MAG_SI_XY_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 238. MAG_SI_XY register description

| | |
|-----------------|---|
| MAG_SI_XY_[7:0] | Soft-iron correction row1 col2 coefficient ⁽¹⁾ . Default value: 00000000 |
|-----------------|---|

1. Value is expressed in sign-module format.

11.18 MAG_SI_XZ (26h)

Soft-iron matrix correction register (r/w).

Table 239. MAG_SI_XZ register

| MAG_SI_XZ_7 | MAG_SI_XZ_6 | MAG_SI_XZ_5 | MAG_SI_XZ_4 | MAG_SI_XZ_3 | MAG_SI_XZ_2 | MAG_SI_XZ_1 | MAG_SI_XZ_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 240. MAG_SI_XZ register description

| | |
|-----------------|---|
| MAG_SI_XZ_[7:0] | Soft-iron correction row1 col3 coefficient ⁽¹⁾ . Default value: 00000000 |
|-----------------|---|

1. Value is expressed in sign-module format.

11.19 MAG_SI_YX (27h)

Soft-iron matrix correction register (r/w).

Table 241. MAG_SI_YX register

| MAG_SI_YX_7 | MAG_SI_YX_6 | MAG_SI_YX_5 | MAG_SI_YX_4 | MAG_SI_YX_3 | MAG_SI_YX_2 | MAG_SI_YX_1 | MAG_SI_YX_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 242. MAG_SI_YX register description

| | |
|-----------------|---|
| MAG_SI_YX_[7:0] | Soft-iron correction row2 col1 coefficient ⁽¹⁾ . Default value: 00000000 |
|-----------------|---|

1. Value is expressed in sign-module format.

11.20 MAG_SI_YY (28h)

Soft-iron matrix correction register (r/w).

Table 243. MAG_SI_YY register

| MAG_SI_YY_7 | MAG_SI_YY_6 | MAG_SI_YY_5 | MAG_SI_YY_4 | MAG_SI_YY_3 | MAG_SI_YY_2 | MAG_SI_YY_1 | MAG_SI_YY_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 244. MAG_SI_YY register description

| | |
|-----------------|---|
| MAG_SI_YY_[7:0] | Soft-iron correction row2 col2 coefficient ⁽¹⁾ . Default value: 00001000 |
|-----------------|---|

1. Value is expressed in sign-module format.

11.21 MAG_SI_YZ (29h)

Soft-iron matrix correction register (r/w).

Table 245. MAG_SI_YZ register

| MAG_SI_YZ_7 | MAG_SI_YZ_6 | MAG_SI_YZ_5 | MAG_SI_YZ_4 | MAG_SI_YZ_3 | MAG_SI_YZ_2 | MAG_SI_YZ_1 | MAG_SI_YZ_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 246. MAG_SI_YZ register description

| | |
|-----------------|---|
| MAG_SI_YZ_[7:0] | Soft-iron correction row2 col3 coefficient ⁽¹⁾ . Default value: 00000000 |
|-----------------|---|

1. Value is expressed in sign-module format.

11.22 MAG_SI_ZX (2Ah)

Soft-iron matrix correction register (r/w).

Table 247. MAG_SI_ZX register

| MAG_SI_ZX_7 | MAG_SI_ZX_6 | MAG_SI_ZX_5 | MAG_SI_ZX_4 | MAG_SI_ZX_3 | MAG_SI_ZX_2 | MAG_SI_ZX_1 | MAG_SI_ZX_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 248. MAG_SI_ZX register description

| | |
|-----------------|---|
| MAG_SI_ZX_[7:0] | Soft-iron correction row3 col1 coefficient ⁽¹⁾ . Default value: 00000000 |
|-----------------|---|

1. Value is expressed in sign-module format.

11.23 MAG_SI_ZY (2Bh)

Soft-iron matrix correction register (r/w).

Table 249. MAG_SI_ZY register

| | | | | | | | |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| MAG_SI_ZY_7 | MAG_SI_ZY_6 | MAG_SI_ZY_5 | MAG_SI_ZY_4 | MAG_SI_ZY_3 | MAG_SI_ZY_2 | MAG_SI_ZY_1 | MAG_SI_ZY_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 250. MAG_SI_ZY register description

| | |
|-----------------|---|
| MAG_SI_ZY_[7:0] | Soft-iron correction row3 col2 coefficient ⁽¹⁾ . Default value: 00000000 |
|-----------------|---|

1. Value is expressed in sign-module format.

11.24 MAG_SI_ZZ (2Ch)

Soft-iron matrix correction register (r/w).

Table 251. MAG_SI_ZZ register

| | | | | | | | |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| MAG_SI_ZZ_7 | MAG_SI_ZZ_6 | MAG_SI_ZZ_5 | MAG_SI_ZZ_4 | MAG_SI_ZZ_3 | MAG_SI_ZZ_2 | MAG_SI_ZZ_1 | MAG_SI_ZZ_0 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

Table 252. MAG_SI_ZZ register description

| | |
|-----------------|---|
| MAG_SI_ZZ_[7:0] | Soft-iron correction row3 col3 coefficient ⁽¹⁾ . Default value: 00001000 |
|-----------------|---|

1. Value is expressed in sign-module format.

11.25 MAG_OFFX_L (2Dh)

Offset for X-axis hard-iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 253. MAG_OFFX_L register

| | | | | | | | |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| MAG_OFF_X_L_7 | MAG_OFF_X_L_6 | MAG_OFF_X_L_5 | MAG_OFF_X_L_4 | MAG_OFF_X_L_3 | MAG_OFF_X_L_2 | MAG_OFF_X_L_1 | MAG_OFF_X_L_0 |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|

Table 254. MAG_OFFX_L register description

| | |
|------------------|---|
| MAG_OFFX_L_[7:0] | Offset for X-axis hard-iron compensation. Default value: 00000000 |
|------------------|---|

11.26 MAG_OFFX_H (2Eh)

Offset for X-axis hard-iron compensation register (r/w).The value is expressed as a 16-bit word in two's complement.

Table 255. MAG_OFFX_H register

| | | | | | | | |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| MAG_OFF_X_H_7 | MAG_OFF_X_H_6 | MAG_OFF_X_H_5 | MAG_OFF_X_H_4 | MAG_OFF_X_H_3 | MAG_OFF_X_H_2 | MAG_OFF_X_H_1 | MAG_OFF_X_H_0 |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|

Table 256. MAG_OFFX_H register description

| | |
|------------------|---|
| MAG_OFFX_H_[7:0] | Offset for X-axis hard-iron compensation. Default value: 00000000 |
|------------------|---|

11.27 MAG_OFFY_L (2Fh)

Offset for Y-axis hard-iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 257. MAG_OFFY_L register

| | | | | | | | |
|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| MAG_OFF Y_L_7 | MAG_OFF Y_L_6 | MAG_OFF Y_L_5 | MAG_OFF Y_L_4 | MAG_OFF Y_L_3 | MAG_OFF Y_L_2 | MAG_OFF Y_L_1 | MAG_OFF Y_L_0 |
|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|

Table 258. MAG_OFFY_L register description

| | |
|------------------|---|
| MAG_OFFY_L_[7:0] | Offset for Y-axis hard-iron compensation. Default value: 00000000 |
|------------------|---|

11.28 MAG_OFFY_H (30h)

Offset for Y-axis hard-iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 259. MAG_OFFY_H register

| | | | | | | | |
|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| MAG_OFF Y_H_7 | MAG_OFF Y_H_6 | MAG_OFF Y_H_5 | MAG_OFF Y_H_4 | MAG_OFF Y_H_3 | MAG_OFF Y_H_2 | MAG_OFF Y_H_1 | MAG_OFF Y_H_0 |
|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|

Table 260. MAG_OFFY_L register description

| | |
|------------------|---|
| MAG_OFFY_H_[7:0] | Offset for Y-axis hard-iron compensation. Default value: 00000000 |
|------------------|---|

11.29 MAG_OFFZ_L (31h)

Offset for Z-axis hard-iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 261. MAG_OFFZ_L register

| | | | | | | | |
|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| MAG_OFF Z_L_7 | MAG_OFF Z_L_6 | MAG_OFF Z_L_5 | MAG_OFF Z_L_4 | MAG_OFF Z_L_3 | MAG_OFF Z_L_2 | MAG_OFF Z_L_1 | MAG_OFF Z_L_0 |
|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|

Table 262. MAG_OFFZ_L register description

| | |
|------------------|---|
| MAG_OFFZ_L_[7:0] | Offset for Z-axis hard-iron compensation. Default value: 00000000 |
|------------------|---|

11.30 MAG_OFFZ_H (32h)

Offset for Z-axis hard-iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 263. MAG_OFFZ_H register

| | | | | | | | |
|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| MAG_OFF Z_H_7 | MAG_OFF Z_H_6 | MAG_OFF Z_H_5 | MAG_OFF Z_H_4 | MAG_OFF Z_H_3 | MAG_OFF Z_H_2 | MAG_OFF Z_H_1 | MAG_OFF Z_H_0 |
|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|

Table 264. MAG_OFFZ_H register description

| | |
|------------------|---|
| MAG_OFFZ_H_[7:0] | Offset for Z-axis hard-iron compensation. Default value: 00000000 |
|------------------|---|

12 Soldering information

The LGA package is compliant with the ECOPACK®, RoHS and "Green" standard.
It is qualified for soldering heat resistance according to JEDEC J-STD-020.

Leave "Pin 1 Indicator" unconnected during soldering.


Land pattern and soldering recommendations are available at www.st.com/mems.

13 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.
ECOPACK is an ST trademark.

13.1 LGA-14 package information

Figure 16. LGA-14 2.5x3x0.86 14L package outline and mechanical data

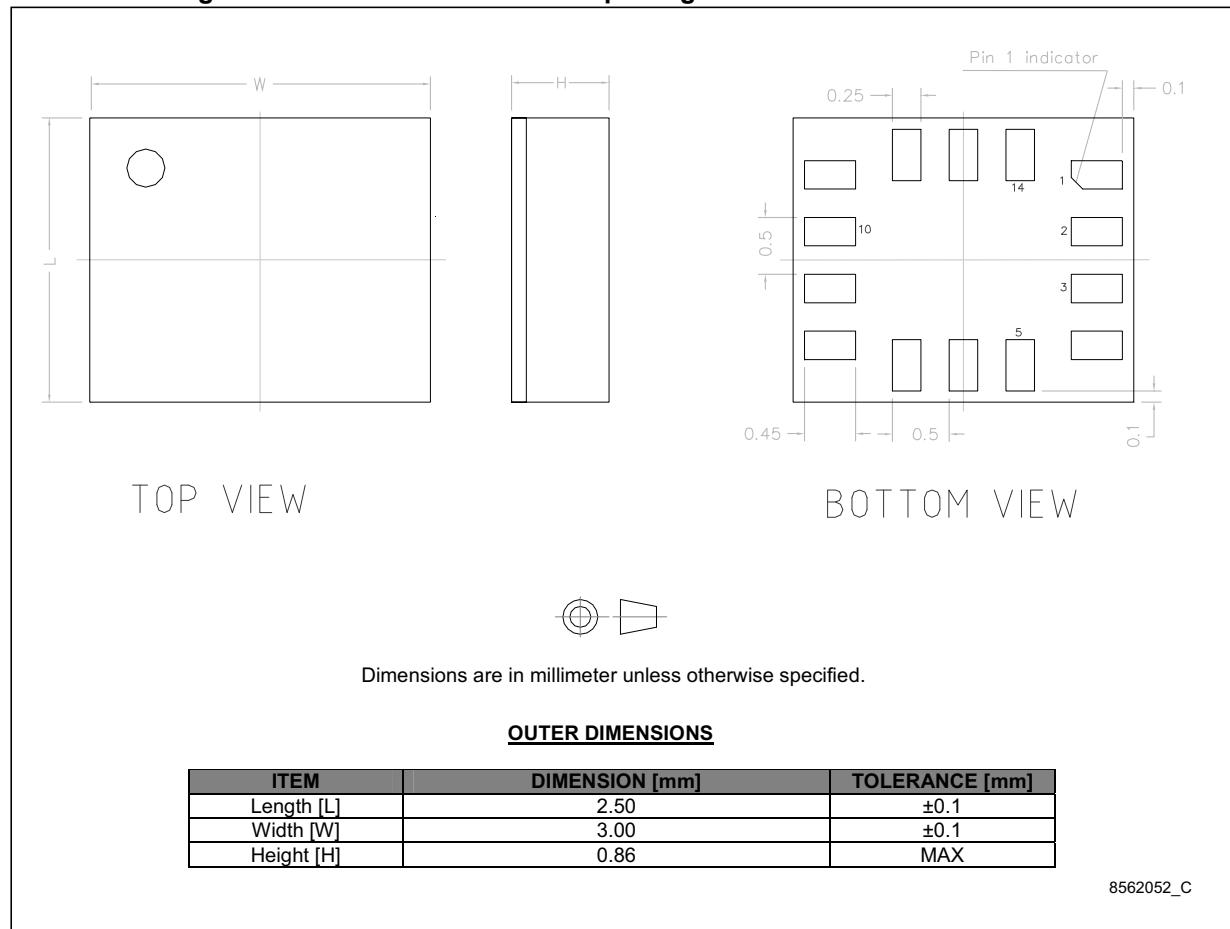

14 Revision history

Table 265. Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 03-Nov-2014 | 1 | Initial release |
| 18-Dec-2014 | 2 | <p>Updated Section 2: Embedded low-power features and subsection</p> <p>Updated Section 5.4: FIFO and subsections</p> <p>Added Section 5.4.7: Filter block diagrams</p> <p>Updated IddLP in Table 4 and TODR in Table 5: Temperature sensor characteristics</p> <p>Updated Table 16: Registers address map</p> <p>Revised registers in Section 9: Register description</p> <p>Updated Table 204: Registers address map - embedded functions</p> <p>Revised registers in Section 11: Embedded functions registers description</p> <p>Textual update in Figure 16: LGA-14 2.5x3x0.86 14L package outline and mechanical data</p> |
| 05-Mar-2015 | 3 | <p>Document status promoted from preliminary to production data</p> <p>Updated bit 0 in Section 9.79: MD2_CFG (5Fh)</p> |
| 23-Apr-2015 | 4 | <p>Updated Vdd_IO (max) in Table 4: Electrical characteristics</p> <p>Added D4D_EN bit to Section 9.73: TAP THS_6D (59h)</p> <p>Updated Table 180: INT_DUR2 register description</p> |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved