



± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications

PART NUMBER:


KX134-1211

Rev. 1.0

31-Jul-2019

Product Description

The KX134-1211 is a tri-axis $\pm 8g$, $\pm 16g$, $\pm 32g$, or $\pm 64g$ silicon micromachined accelerometer featuring a user-configurable 3-stage Advanced Data Path (ADP) consisting of a low-pass filter, low-pass/high-pass filter, and RMS calculation engine. The KX134-1211 accelerometer also features an advanced Wake-Up and Back-to-Sleep detection with a high-resolution threshold capability configurable down to 15.6 mg, 512-byte buffer that continues to record data even when being read, as well as embedded engines for orientation, Directional-Tap™/Double-Tap™, and Free fall detection. The sense element is fabricated using Kionix's proprietary plasma micromachining process technology. Acceleration sensing is based on the principle of a differential capacitance arising from acceleration-induced motion of the sense element, which further utilizes common mode cancellation to decrease errors from process variation, temperature, and environmental stress. The sense element is hermetically sealed at the wafer level by bonding a second silicon lid wafer to the device wafer. A separate ASIC device packaged with the sense element provides signal conditioning and intelligent user-programmable application algorithms. The KX134-1211 accelerometers offer lower noise and improved linearity over of the entire temperature range. The accelerometer is delivered in a 2 x 2 x 0.9 mm LGA 12-pin plastic package operating from a 1.7V – 3.6V (VDD) / 1.2V – 3.6V (IO_VDD) DC supplies. Internal voltage regulators are used to maintain constant internal operating voltages over the range of input supply voltages. This results in stable operating characteristics even if the supply voltage changes. I²C or SPI digital protocol is supported to configure the chip, read acceleration outputs, and check for updates to the orientation, Directional-Tap™/Double-Tap™ detection, Free fall detection, and activity monitoring algorithms. Two configurable interrupt pins are also available to show the output of the embedded detection algorithms.

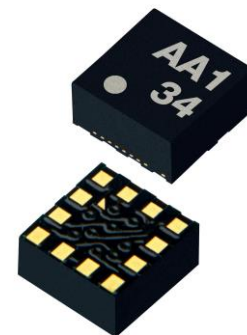

Features

- Operating temperature range from -40°C to +105°C
- Small footprint: 2 x 2 x 0.9 mm LGA 12-pin package
- User-configurable g-range up to $\pm 64g$ and Output Data Rate up to 25600Hz
- A user-configurable 3-stage Advanced Data Path (ADP) consisting of a low-pass filter, low-pass/high-pass filter, and RMS calculation engine.
- High resolution Wake-Up / Back-to-Sleep functions with threshold configurable down to 15.6 mg
- User accessible manufacturer and part ID registers
- Self-test Function
- Integrated Free fall, Directional-Tap™ / Double-Tap™, and Device-orientation algorithms
- Improved ODR accuracy in Low Power mode over temperature
- Embedded 512-byte FIFO buffer continues to record data even when being read
- User-selectable Low Power or High-Performance modes
- Internal voltage regulator
- Digital I²C up to 3.4MHz and Digital SPI up to 10MHz
- Excellent temperature performance with high shock survivability
- RoHS / REACH compliant



| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Table of Contents

| | |
|--|-----------|
| PRODUCT DESCRIPTION | 1 |
| FEATURES | 1 |
| TABLE OF CONTENTS | 2 |
| FUNCTIONAL DIAGRAM..... | 4 |
| PRODUCT SPECIFICATIONS | 5 |
| MECHANICAL..... | 5 |
| ELECTRICAL | 6 |
| <i>Start Up Time Profile</i> | <i>7</i> |
| <i>Current Profile</i> | <i>7</i> |
| <i>Power-On Procedure</i> | <i>8</i> |
| ENVIRONMENTAL | 9 |
| <i>Handling, Mounting, Soldering</i> | <i>9</i> |
| <i>Floor Life.....</i> | <i>9</i> |
| TERMINOLOGY | 10 |
| <i>g</i> | <i>10</i> |
| <i>Sensitivity</i> | <i>10</i> |
| <i>Zero-g offset</i> | <i>10</i> |
| <i>Self-test</i> | <i>10</i> |
| FUNCTIONALITY..... | 11 |
| <i>Sense element</i> | <i>11</i> |
| <i>ASIC interface</i> | <i>11</i> |
| <i>Factory calibration</i> | <i>11</i> |
| APPLICATION SCHEMATIC | 12 |
| PIN DESCRIPTION | 12 |
| PACKAGE DIMENSIONS AND ORIENTATION | 13 |
| <i>Dimensions</i> | <i>13</i> |
| <i>Orientation</i> | <i>14</i> |
| DIGITAL INTERFACE | 17 |
| I ² C SERIAL INTERFACE..... | 17 |
| <i>I²C Operation</i> | <i>18</i> |
| <i>Writing to an 8-bit Register.....</i> | <i>20</i> |
| <i>Reading from an 8-bit Register</i> | <i>20</i> |
| <i>Data Transfer Sequences.....</i> | <i>21</i> |
| <i>HS-mode.....</i> | <i>22</i> |
| <i>I²C Timing Diagram</i> | <i>23</i> |
| SPI COMMUNICATIONS | 24 |
| <i>4-Wire SPI Interface.....</i> | <i>24</i> |
| <i>4-Wire SPI Timing Diagram</i> | <i>25</i> |
| <i>4-Wire Read and Write Registers</i> | <i>26</i> |
| <i>3-Wire SPI Interface.....</i> | <i>27</i> |
| <i>3-Wire SPI Timing Diagram</i> | <i>28</i> |
| <i>3-Wire Read and Write Registers</i> | <i>29</i> |

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

REVISION HISTORY 30

APPENDIX..... 31



± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications


PART NUMBER:


KX134-1211

Rev. 1.0

31-Jul-2019

Functional Diagram

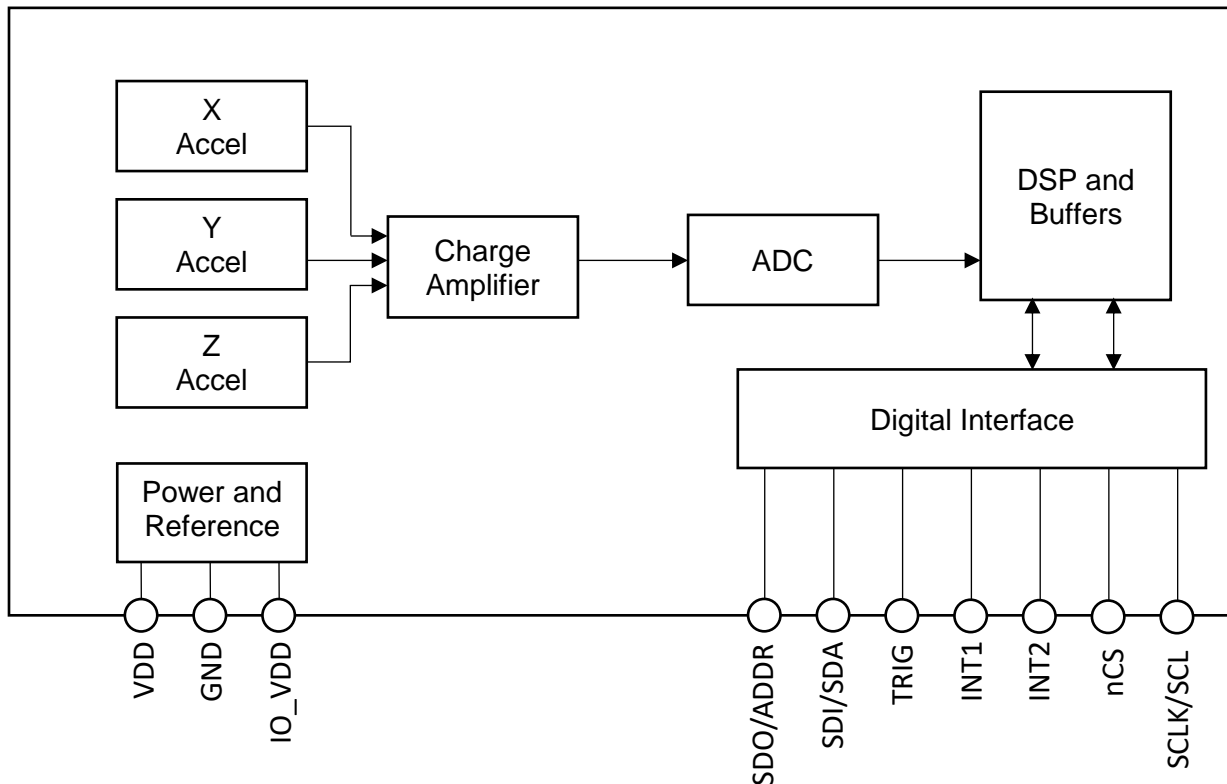

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Product Specifications

Mechanical


(specifications are for operation at 2.5V and T = 25C unless stated otherwise)

| Parameters | | Units | Min | Typical | Max |
|---|-------------------------|----------|------|----------------------------------|------|
| Operating Temperature Range | | °C | -40 | - | +105 |
| Zero-g Offset | | mg | | ±75 | ±175 |
| Zero-g Offset Variation from RT over Temp. | | mg/°C | | 0.5 | |
| Sensitivity ¹ (16 bit) | GSEL1=0, GSEL0=0 (±8g) | counts/g | 3768 | 4096 | 4424 |
| | GSEL1=0, GSEL0=1 (±16g) | | 1884 | 2048 | 2212 |
| | GSEL1=1, GSEL0=0 (±32g) | | 942 | 1024 | 1106 |
| | GSEL1=1, GSEL0=1 (±64g) | | 471 | 512 | 553 |
| Sensitivity (Buffer 8-bit mode) ^{1,2} | GSEL1=0, GSEL0=0 (±8g) | counts/g | | 16 | |
| | GSEL1=0, GSEL0=1 (±16g) | | | 8 | |
| | GSEL1=1, GSEL0=0 (±32g) | | | 4 | |
| | GSEL1=1, GSEL0=1 (±64g) | | | 2 | |
| Sensitivity Variation from RT over Temperature | | %/°C | | 0.01 | |
| Positive Self-Test Output change on Activation ³ | | g | 0.1 | 0.5 | 0.9 |
| Mechanical Signal Bandwidth (-3dB) ⁴ | | Hz | | 8200 (x) 8500 (y) 5600 (z) | |
| Non-Linearity | | % of FS | | 0.6 | |
| Cross Axis Sensitivity | | % | | 2 | |
| Noise ⁵ | RMS | mg | | 1.9 | |
| | Density | µg/√Hz | | 300 | |

Table 1: Mechanical Specifications

Notes:

- Resolution and acceleration ranges are user selectable via I²C or SPI
- Sensitivity is proportional to BRES in BUF_CNTL2.
- Requires changing of STPOL bit in INC1 register to 1 prior to performing self-test
- Signal bandwidth varies with Output Data Rate (ODR), and Low Pass Filter setting. Measured with ODR = 25600Hz, LPRO = 1 settings.
- Noise varies with ODR, power mode, and the Average Filter Control (AVC) settings. Measured with RES = 1, ODR = 50Hz, IIR_BYPASS = 0, LPRO = 1 settings.

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Electrical

(specifications are for operation at 2.5V and T = 25C unless stated otherwise)

| Parameters | | Units | Min | Typical | Max |
|--|---|-------|--------------|----------------|--------------|
| Supply Voltage (VDD) | Operating | V | 1.7 | 2.5 | 3.6 |
| I/O Pads Supply Voltage (IO_VDD) | SPI, I ² C (Fast/Standard mode) | V | 1.2 | | 3.6 |
| | I ² C (High Speed mode) | | 1.7 | | 3.6 |
| Current Consumption (Accelerometer Only) | Operating (High Performance with Wake-up Detection) ODR=400Hz | μA | | 148 | |
| | Operating (Low power with Wake-up detection) ODR=0.781Hz ¹ | | | 0.53 | |
| | Operating (Low Power with Wake-up detection plus Advanced Data Path) ODR=0.781Hz ⁷ | | | 0.67 | |
| Standby Current Consumption | | μA | | 0.5 | |
| Output Low Voltage (V _{OL}) ² | (IO_VDD < 2V) | V | - | - | 0.2 * IO_VDD |
| | (IO_VDD ≥ 2V) | V | - | - | 0.4 |
| Output High Voltage (V _{OH}) | | V | 0.8 * IO_VDD | - | - |
| Input Low Voltage (V _{IL}) | | V | - | - | 0.2 * IO_VDD |
| Input High Voltage (V _{IH}) | | V | 0.8 * IO_VDD | - | - |
| Start Up Time ³ | | ms | 2 | | 1300 |
| Power Up Time ⁴ | | ms | | 20 | 50 |
| I ² C Communication Rate | | MHz | | | 3.4 |
| I ² C Slave Address (7-bit) | | | | 0x1E / 0x1F | |
| WHO_AM_I register value | | | | 0x46 | |
| Output Data Rate (ODR) ⁵ | | Hz | 0.781 | 50 | 25600 |
| Output Signal Bandwidth (-3dB) ⁶ | | Hz | | ODR/9 or ODR/2 | |

Table 2: Electrical Specifications

Notes:

1. Current varies with Output Data Rate (ODR) as shown in Figure 2, types and number of enabled digital engines, the average filter control settings, and VDD. Measured with OWUF<2:0> = 0, OSA<3:0> = 0, AVC<2:0> = 1, LPSTPSEL = 1.
2. For I²C communication, this assumes a minimum 1.5kΩ pull-up resistor on SCL and SDA pins.
3. Start up time is from PC1 set to valid outputs. Time varies with ODR, Power Mode, and FSTUP bit setting (see Figure 1).
4. Power up time is from VDD valid to device boot completion.
5. Typical values. ODR is user-selectable via I²C or SPI. See ODCNTL register for details.
6. Refers to accelerometer's raw output data. Additional bandwidth control is available using the Advanced Data Path (ADP) engine.
7. Measured with RMS_AVC<2:0> = 1, OADP<3:0> = 0, LPSTPSEL = 0.



± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications

PART NUMBER:
KX134-1211
Rev. 1.0
31-Jul-2019

Start Up Time Profile

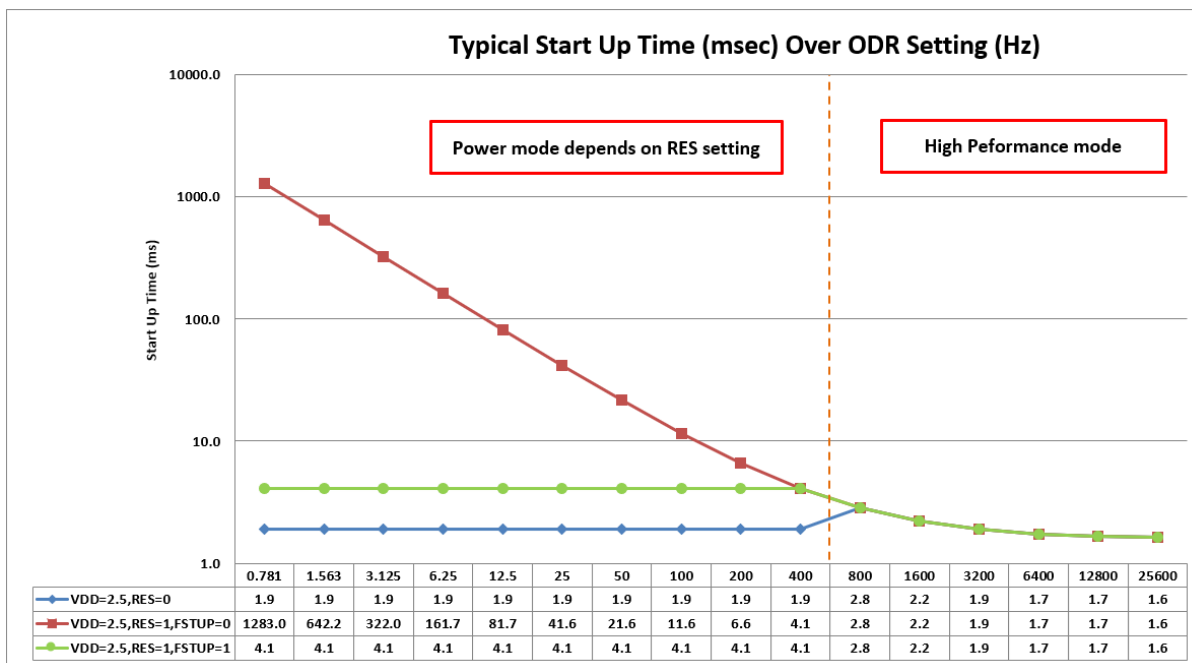


Figure 1: Start Up Time Diagram

Current Profile

| ODR (Hz) | Typical Current (µA) | | | |
|----------|-------------------------------|-------------------------------------|------------------------|------------------------------|
| | High Performance with Wake-up | High Performance with Wake-up & ADP | Low Power with Wake-up | Low Power with Wake-up & ADP |
| Standby | 0.50 | 0.50 | 0.50 | 0.50 |
| 0.781 | 148 | 148 | 0.53 | 0.67 |
| 1.563 | 148 | 148 | 0.60 | 0.74 |
| 3.125 | 148 | 148 | 0.72 | 0.83 |
| 6.25 | 148 | 148 | 0.97 | 1.14 |
| 12.5 | 148 | 148 | 1.5 | 1.7 |
| 25 | 148 | 148 | 2.4 | 2.7 |
| 50 | 148 | 148 | 4.4 | 4.9 |
| 100 | 148 | 148 | 8.5 | 9.2 |
| 200 | 148 | 150 | 16 | 18 |
| 400 | 148 | 150 | 31 | 34 |
| 800 | 148 | 152 | 148 | 152 |
| 1600 | 149 | 154 | 149 | 154 |
| 3200 | 150 | 160 | 150 | 160 |
| 6400 | 152 | 172 | 152 | 172 |
| 12800 | 155 | 194 | 155 | 194 |
| 25600 | 162 | 239 | 162 | 239 |

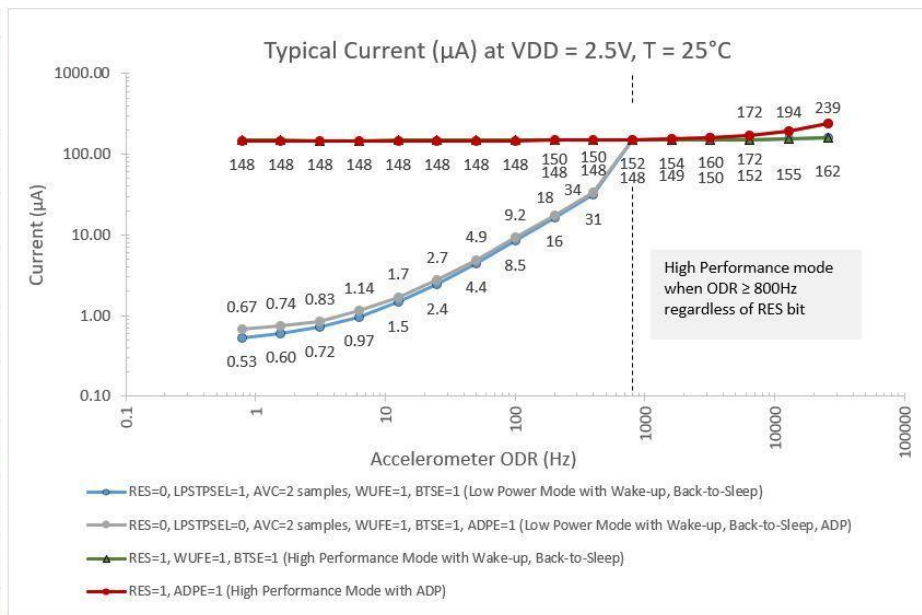



Figure 2: Current as a function of Output Data Rate (ODR) and Power Mode Settings


| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Power-On Procedure

Proper functioning of power-on reset (POR) is dependent on the specific **VDD**, **VDD_{LOW}**, **T_{VDD}** (rise time), and **T_{VDD_OFF}** profile of individual applications. It is recommended to minimize **VDD_{LOW}**, and **T_{VDD}**, and maximize **T_{VDD_OFF}**. It is also advised that the **VDD** ramp up time **T_{VDD}** be monotonic. Note that the outputs will not be stable until **VDD** has reached its final value.

! *To assure proper POR, the application should be evaluated over the customer specified range of VDD, VDD_{LOW}, T_{VDD}, T_{VDD_OFF} and temperature as POR performance can vary depending on these parameters.*

- Please refer to Technical Note [TN027 Power-On Procedure](#) for more information.

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Environmental

| Parameters | | Units | Min | Typical | Max |
|-------------------------------------|-----------------|-------|------|---------|-----------------------------------|
| Supply Voltage (VDD) | Absolute Limits | V | -0.3 | - | 3.60 |
| Operating Temperature Range | | °C | -40 | - | +105 |
| Storage Temperature Range | | °C | -55 | - | +150 |
| Mech. Shock (powered and unpowered) | | g | - | - | 5000 for 0.5ms 10000 for 0.2ms |
| ESD | HBM | V | - | - | 2000 |

Table 3: Environmental Specifications



Caution: ESD Sensitive and Mechanical Shock Sensitive Component, improper handling can cause permanent damage to the device.




This product is in conformance with RoHS directive, REACH regulation, and is Halogen-Free. For the current certificate of compliance, visit www.kionix.com website.

Handling, Mounting, Soldering

For package handling, mounting, and soldering guidelines, see [TN007 Package Handling, Mounting, and Soldering Guidelines](#) technical note.

Floor Life

Factory floor life exposure of the KX134-1211 reels removed from the moisture barrier bag should not exceed a maximum of 168 hours at 30C/60%RH. If this floor life is exceeded, the parts should be dried per the IPC/JEDEC J-STD-033D standard (or latest revision).

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Terminology

g

A unit of acceleration equal to the acceleration of gravity at the earth's surface.

$$1g = 9.8 \frac{m}{s^2}$$

One thousandth of a g (0.0098 m/ s²) is referred to as 1 milli-g (1 mg).

Sensitivity

The sensitivity of an accelerometer is the change in output per unit of input acceleration at nominal VDD and temperature. The term is essentially the gain of the sensor expressed in counts per g (counts/g) or LSB's per g (LSB/g). Occasionally, sensitivity is expressed as a resolution, i.e. milli-g per LSB (mg/LSB) or milli-g per count (mg/count). Sensitivity for a given axis is determined by measurements of the formula:

$$Sensitivity = \frac{(Output@+1g - Output@-1g)}{2g}$$


The sensitivity tolerance describes the range of sensitivities that can be expected from a large population of sensors at room temperature and over life. When the temperature deviates from room temperature (25°C), the sensitivity will vary by the amount shown in Table 1.

Zero-g offset

Zero-g offset or 0-g offset describes the actual output of the accelerometer when no acceleration is applied. Ideally, the output would always be in the middle of the dynamic range of the sensor (content of the OUTX, OUTY, OUTZ registers = 00, expressed as a 2's complement number). However, because of mismatches in the sensor, calibration errors, and mechanical stress, the output can deviate from 00. This deviation from the ideal value is called 0-g offset. The zero-g offset tolerance describes the range of 0-g offsets of a population of sensors over the operating temperature range.

Self-test

Self-test allows a functional test of the sensor without applying a physical acceleration to it. When activated, an electrostatic force is applied to the sensor, simulating an input acceleration. The sensor outputs respond accordingly. If the output signals change within the amplitude specified in Table 1, then the sensor is working properly and the parameters of the interface chip are within the defined specifications.

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Functionality

Sense element

The sense element is fabricated using Kionix's proprietary plasma micromachining process technology. This process technology allows Kionix to create mechanical silicon structures, which are essentially mass-spring systems that move in the direction of the applied acceleration. Acceleration sensing is based on the principle of a differential capacitance arising from the acceleration-induced motion. Capacitive plates on the moving mass move relative to fixed capacitive plates anchored to the substrate. The sense element is hermetically sealed at the wafer level by bonding a second silicon lid wafer to the device using a glass frit.

ASIC interface

A separate ASIC device packaged with the sense element provides all of the signal conditioning and communication with the sensor. The complete measurement chain is composed by a low-noise capacitance to voltage amplifier, which converts the differential capacitance of the MEMS sensor into an analog voltage that is sent through an analog-to-digital converter. The acceleration data may be accessed through the I²C or SPI digital communications provided by the ASIC. In addition, the ASIC contains all of the logic to allow the user to choose data rates, g-ranges, filter settings, and interrupt logic.

Factory calibration


Kionix trims the offset and sensitivity of each accelerometer by adjusting gain (sensitivity) and 0-g offset trim codes stored in nonvolatile memory (OTP). Additionally, all functional register default values are also programmed into the nonvolatile memory. Every time the device is turned on or a software reset command is issued, the trimming parameters and default register values are downloaded into the volatile registers to be used during active operation. This allows the device to function without further calibration.



± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications

PART NUMBER:
KX134-1211
Rev. 1.0
31-Jul-2019

Application Schematic

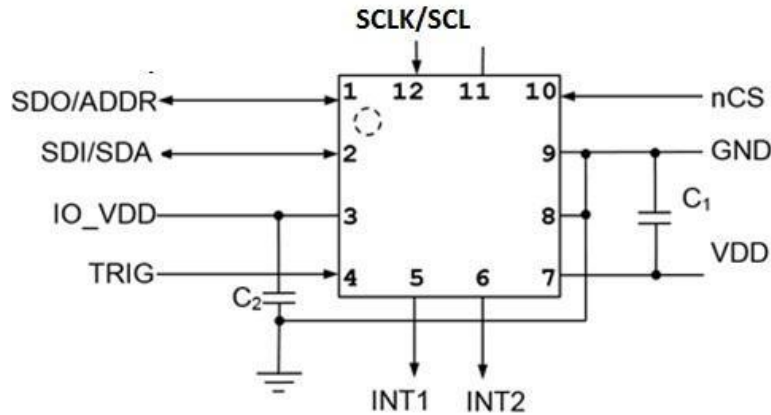

Pin Description

| Pin | Name | Description |
|-----|----------|--|
| 1 | SDO/ADDR | Serial Data Out pin during 4-wire SPI communication and part of the device address during I2C communication. Do not leave floating. |
| 2 | SDI/SDA | SPI Data input / I2C Serial Data |
| 3 | IO_VDD | The power supply input for the digital communication bus. Optionally decouple this pin to ground with a 0.1uF ceramic capacitor. |
| 4 | TRIG | Trigger pin for FIFO buffer control. Connect to GND when not using external trigger option. |
| 5 | INT1 | Physical Interrupt 1 (Push-Pull). The pin is in High-Z state during POR and is driven LOW following POR. Leave floating if not used. |
| 6 | INT2 | Physical Interrupt 2 (Push-Pull). The pin is in High-Z state during POR and is driven LOW following POR. Leave floating if not used. |
| 7 | VDD | The power supply input. Decouple this pin to ground with a 0.1uF ceramic capacitor. |
| 8 | GND | Ground |
| 9 | GND | Ground |
| 10 | nCS | Chip Select (active LOW) for SPI communication. Connect to IO_VDD for I2C communication. Do not leave floating. |
| 11 | NC | Not Internally Connected. Can be connected to VDD, IO_VDD, GND or leave floating. |
| 12 | SCLK/SCL | SPI and I2C Serial Clock |

Table 4: Pin Description





± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications

PART NUMBER:
KX134-1211
Rev. 1.0
31-Jul-2019

Package Dimensions and Orientation

Dimensions

2 x 2 x 0.9 mm LGA 12-pin

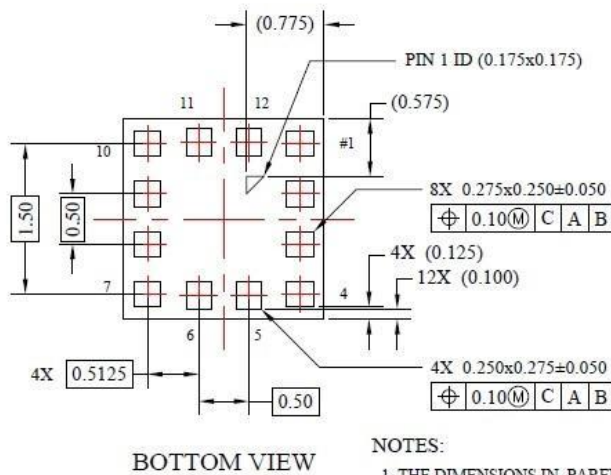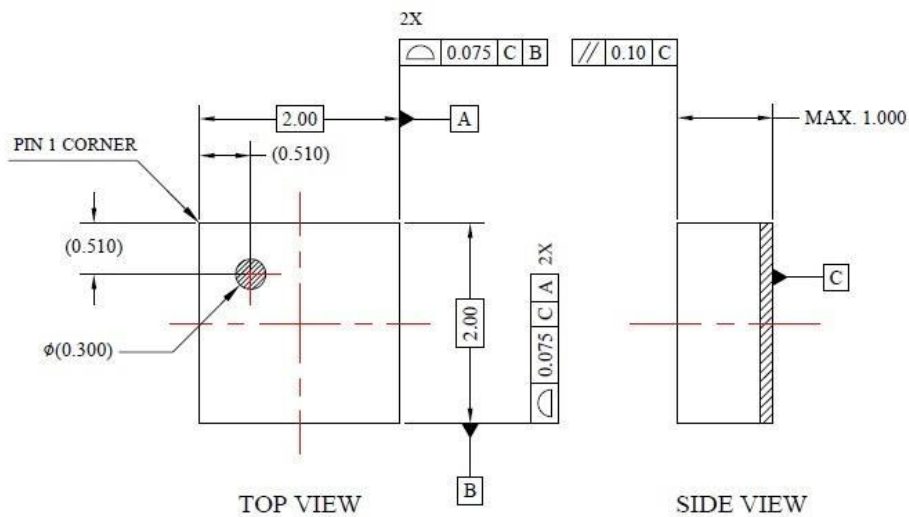


NOTES:


1. THE DIMENSIONS IN PARENTHESIS ARE REFERENCE.
2. ALL DIMENSIONS IN MILLIMETERS(MM).

Ref: 97SPP02433A_O

All dimensions and tolerances conform to ASME Y14.5M-1994

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Orientation

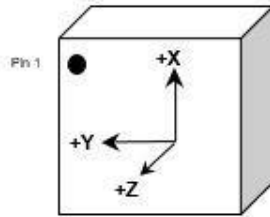


When device is accelerated in +X, +Y or +Z direction, the corresponding output will increase.

Static X/Y/Z Output Response versus Orientation to Earth's surface (1g):







GSEL1=0, GSEL0=0 (±8g)


| Position | 1 | | 2 | | 3 | | 4 | | 5 | | 6 | |
|-------------------|-------|-----|-------|-----|-------|-----|-------|-----|-------------------|-----|-------------------|-----|
| Diagram | | | | | | | | | Top Bottom | | Bottom Top | |
| Resolution (bits) | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 |
| X (counts) | +4096 | +16 | 0 | 0 | -4096 | -16 | 0 | 0 | 0 | 0 | 0 | 0 |
| Y (counts) | 0 | 0 | -4096 | -16 | 0 | 0 | +4096 | +16 | 0 | 0 | 0 | 0 |
| Z (counts) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | +4096 | +16 | -4096 | -16 |
| X-Polarity | + | | 0 | | - | | 0 | | 0 | | 0 | |
| Y-Polarity | 0 | | - | | 0 | | + | | 0 | | 0 | |
| Z-Polarity | 0 | | 0 | | 0 | | 0 | | + | | - | |



Earth's Surface







Static X/Y/Z Output Response versus Orientation to Earth's surface (1g):
GSEL1=0, GSEL0=1 (±16g)


| Position | 1 | | 2 | | 3 | | 4 | | 5 | | 6 | |
|-------------------|---|----|---|----|---|----|---|----|---|----|---|----|
| Diagram |  | |  | |  | |  | |  | |  | |
| Resolution (bits) | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 |
| X (counts) | +2048 | +8 | 0 | 0 | -2048 | -8 | 0 | 0 | 0 | 0 | 0 | 0 |
| Y (counts) | 0 | 0 | -2048 | -8 | 0 | 0 | +2048 | +8 | 0 | 0 | 0 | 0 |
| Z (counts) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | +2048 | +8 | -2048 | -8 |
| X-Polarity | + | | 0 | | - | | 0 | | 0 | | 0 | |
| Y-Polarity | 0 | | - | | 0 | | + | | 0 | | 0 | |
| Z-Polarity | 0 | | 0 | | 0 | | 0 | | + | | - | |




Earth's Surface

Static X/Y/Z Output Response versus Orientation to Earth's surface (1g):
GSEL1=1, GSEL0=0 (±32g)







| Position | 1 | | 2 | | 3 | | 4 | | 5 | | 6 | |
|-------------------|---|----|---|----|---|----|---|----|---|----|---|----|
| Diagram |  | |  | |  | |  | |  | |  | |
| Resolution (bits) | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 |
| X (counts) | +1024 | +4 | 0 | 0 | -1024 | -4 | 0 | 0 | 0 | 0 | 0 | 0 |
| Y (counts) | 0 | 0 | -1024 | -4 | 0 | 0 | +1024 | +4 | 0 | 0 | 0 | 0 |
| Z (counts) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | +1024 | +4 | -1024 | -4 |
| X-Polarity | + | | 0 | | - | | 0 | | 0 | | 0 | |
| Y-Polarity | 0 | | - | | 0 | | + | | 0 | | 0 | |
| Z-Polarity | 0 | | 0 | | 0 | | 0 | | + | | - | |



Earth's Surface


| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Static X/Y/Z Output Response versus Orientation to Earth's surface (1g):
GSEL1=1, GSEL0=1 (±64g)

| Position | 1 | | 2 | | 3 | | 4 | | 5 | | 6 | |
|-------------------|---|----|---|----|---|----|---|----|--|----|--|----|
| Diagram |  | |  | |  | |  | | Top  Bottom | | Bottom  Top | |
| Resolution (bits) | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 | 16 | 8 |
| X (counts) | +512 | +2 | 0 | 0 | -512 | -2 | 0 | 0 | 0 | 0 | 0 | 0 |
| Y (counts) | 0 | 0 | -512 | -2 | 0 | 0 | +512 | +2 | 0 | 0 | 0 | 0 |
| Z (counts) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | +512 | +2 | -512 | -2 |
| X-Polarity | + | | 0 | | - | | 0 | | 0 | | 0 | |
| Y-Polarity | 0 | | - | | 0 | | + | | 0 | | 0 | |
| Z-Polarity | 0 | | 0 | | 0 | | 0 | | + | | - | |

↓ (1g)

Earth's Surface

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Digital Interface

The Kionix KX134-1211 digital accelerometer can communicate via the I²C and SPI digital serial interface protocols. This allows for easy system integration by eliminating analog-to-digital converter requirements and by providing direct communication with system micro-controllers.

The serial interface terms and descriptions as indicated in Table 5 below will be observed throughout this document.

| Term | Description |
|-------------|---|
| Transmitter | The device that transmits data to the bus. |
| Receiver | The device that receives data from the bus. |
| Master | The device that initiates a transfer, generates clock signals, and terminates a transfer. |
| Slave | The device addressed by the Master. |


Table 5: Serial Interface Terminologies

I²C Serial Interface

As previously mentioned, the KX134-1211 can communicate on an I²C bus. I²C is primarily used for synchronous serial communication between a Master device and one or more Slave devices. The Master, typically a micro controller, provides the serial clock signal and addresses Slave devices on the bus. The KX134-1211 always operates as a Slave device during standard Master-Slave I²C operation.

I²C is a two-wire serial interface that contains a Serial Clock (SCL) line and a Serial Data (SDA) line. SCL is a serial clock that is provided by the Master, but can be held LOW by any Slave device, putting the Master into a wait condition. SDA is a bi-directional line used to transmit and receive data to and from the interface. Data is transmitted MSB (Most Significant Bit) first in 8-bit per byte format, and the number of bytes transmitted per transfer is unlimited. The I²C bus is considered free when both lines are HIGH.

The I²C interface is compliant with high-speed mode, fast mode and standard mode I²C protocols.

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

I²C Operation

Transactions on the I²C bus begin after the Master transmits a start condition (S), which is defined as a HIGH-to-LOW transition on the data line while the SCL line is held HIGH. The bus is considered busy after this condition. The next byte of data transmitted after the start condition contains the Slave Address (SAD) in the seven MSBs (Most Significant Bits), and the LSB (Least Significant Bit) tells whether the Master will be receiving data '1' from the Slave or transmitting data '0' to the Slave. When a Slave Address is sent, each device on the bus compares the seven MSBs with its internally stored address. If they match, the device considers itself addressed by the Master. The KX134-1211 Slave Address is comprised of a user programmable part, a factory programmable part, and a fixed part, which allows for connection of multiple accelerometers to the same I²C bus. The Slave Address associated with the KX134-1211 is 00111YX, where the user programmable bit X, is determined by the assignment of ADDR (pin 1) to GND or IO_VDD. Also, the factory programmable bit Y is set at the factory. **For KX134-1211, the factory programmable bit Y is fixed to 1** (contact your Kionix sales representative for list of available devices). Table 6 lists possible I²C addresses for KX134-1211. As a result, up to four accelerometers can be implemented on a shared I²C bus as shown in Figure 3 (e.g. two KX134-1211 accelerometers and two other accelerometers with factory programmable bit Y set to 0).

| Description | ADDR pin | 7-bit Address | Address | <7> | <6> | <5> | <4> | <3> | Y | X | <0> |
|-------------|----------|---------------|---------|-----|-----|-----|-----|-----|-----|-----|-----|
| | | | | | | | | | <2> | <1> | |
| I2C Wr | GND | 0x1E | 0x3C | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 |
| I2C Rd | GND | 0x1E | 0x3D | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 |
| I2C Wr | IO_VDD | 0x1F | 0x3E | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| I2C Rd | IO_VDD | 0x1F | 0x3F | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |


Table 6: I²C Slave Addresses for KX134-1211

It is mandatory that receiving devices acknowledge (ACK) each transaction. Therefore, the transmitter must release the SDA line during this ACK pulse. The receiver then pulls the data line LOW so that it remains stable LOW during the HIGH period of the ACK clock pulse. A receiver that has been addressed, whether it is Master or Slave, is obliged to generate an ACK after each byte of data has been received. To conclude a transaction, the Master must transmit a stop condition (P) by transitioning the SDA line from LOW to HIGH while SCL is HIGH. The I²C bus is now free. Note that if the KX134-1211 is accessed through I²C protocol before the startup is finished a NACK signal is sent.



± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications


PART NUMBER:
KX134-1211
Rev. 1.0
31-Jul-2019

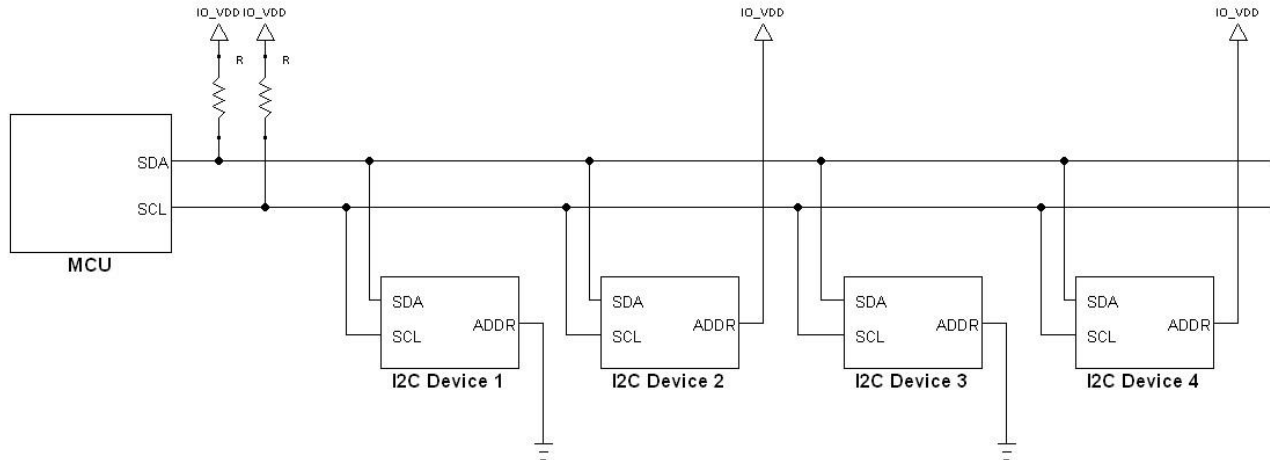

| I ² C Device | Part Number | ADDR Pin | Slave Address | Bit Y (Bit 1 in 7-bit address) |
|-------------------------|-------------|----------|---------------|--------------------------------|
| 1 | KX134-1211 | GND | 0x1E | Factory Set to 1 |
| 2 | KX134-1211 | IO_VDD | 0x1F | Factory Set to 1 |
| 3 | *KXMMM | GND | 0x1C | Factory Set to 0 |
| 4 | *KXMMM | IO_VDD | 0x1D | Factory Set to 0 |

* KXMMM – contact Kionix sales representative for list of compatible devices

Figure 3: Multiple KX134-1211 Accelerometers on a Shared I²C Bus

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Writing to an 8-bit Register


Upon power up, the Master must write to the KX134's control registers to set its operational mode. Therefore, when writing to a control register on the I²C bus, as shown Sequence 1 on the following page, the following protocol must be observed: After a start condition, SAD+W transmission, and the KX134-1211 ACK has been returned, an 8-bit Register Address (RA) command is transmitted by the Master. This command is telling the KX134-1211 to which 8-bit register the Master will be writing the data. Since this is I²C mode, the LSB of the RA command should always be zero (0). The KX134-1211 acknowledges the RA and the Master transmits the data to be stored in the 8-bit register. The KX134-1211 acknowledges that it has received the data and the Master transmits a stop condition (P) to end the data transfer. The data sent to the KX134-1211 is now stored in the appropriate register. The KX134-1211 automatically increments the received RA commands and, therefore, multiple bytes of data can be written to sequential registers after each Slave ACK as shown in Sequence 2 on the following page.

Note** If a STOP condition is sent on the least significant bit of write data or the following master acknowledge cycle, the last write operation is not guaranteed and it may alter the content of the affected registers

Reading from an 8-bit Register

When reading data from a KX134-1211 8-bit register on the I²C bus, as shown in Sequence 3 on the next page, the following protocol must be observed: The Master first transmits a start condition (S) and the appropriate Slave Address (SAD) with the LSB set at '0' to write. The KX134-1211 acknowledges and the Master transmits the 8-bit RA of the register it wants to read. The KX134-1211 again acknowledges, and the Master transmits a repeated start condition (Sr). After the repeated start condition, the Master addresses the KX134-1211 with a '1' in the LSB (SAD+R) to read from the previously selected register. The Slave then acknowledges and transmits the data from the requested register. The Master does not acknowledge (NACK) it received the transmitted data, but transmits a stop condition to end the data transfer. Note that the KX134-1211 automatically increments through its sequential registers, allowing data to be read from multiple registers following a single SAD+R command as shown below in Sequence 4 on the following page. Reading data from a buffer read register is a special case because if register address (RA) is set to buffer read register (BUF_READ) in Sequence 4, the register auto-increment feature is automatically disabled. Instead, the Read Pointer will increment to the next data in the buffer, thus allowing reading multiple bytes of data from the buffer using a single SAD+R command.

Note** Accelerometer's output data should be read in a single transaction using the auto-increment feature to prevent output data from being updated prior to intended completion of the read transaction.

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Data Transfer Sequences

The following information illustrates the variety of data transfers that can occur on the I²C bus and how the Master and Slave interact during these transfers. Table 7 defines the I²C terms used during the data transfers.

| Term | Definition |
|------|---------------------------|
| S | Start Condition |
| Sr | Repeated Start Condition |
| SAD | Slave Address |
| W | Write Bit |
| R | Read Bit |
| ACK | Acknowledge |
| NACK | Not Acknowledge |
| RA | Register Address |
| Data | Transmitted/Received Data |
| P | Stop Condition |

Table 7: I²C Terms

Sequence 1: The Master is writing one byte to the Slave

| | | | | | | | | |
|--------|---|---------|-----|----|-----|------|-----|---|
| Master | S | SAD + W | | RA | | DATA | | P |
| Slave | | | ACK | | ACK | | ACK | |

Sequence 2: The Master is writing multiple bytes to the Slave


| | | | | | | | | | | |
|--------|---|---------|-----|----|-----|------|-----|------|-----|---|
| Master | S | SAD + W | | RA | | DATA | | DATA | | P |
| Slave | | | ACK | | ACK | | ACK | | ACK | |

Sequence 3: The Master is receiving one byte of data from the Slave

| | | | | | | | | | | | |
|--------|---|---------|-----|----|-----|----|---------|-----|------|------|---|
| Master | S | SAD + W | | RA | | Sr | SAD + R | | | NACK | P |
| Slave | | | ACK | | ACK | | | ACK | DATA | | |

Sequence 4: The Master is receiving multiple bytes of data from the Slave

| | | | | | | | | | | | | | |
|--------|---|---------|-----|----|-----|----|---------|-----|------|-----|------|------|---|
| Master | S | SAD + W | | RA | | Sr | SAD + R | | | ACK | | NACK | P |
| Slave | | | ACK | | ACK | | | ACK | DATA | | DATA | | |

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

HS-mode

To enter the 3.4MHz high speed mode of communication, the device must receive the following sequence of conditions from the master: a Start condition followed by a Master code (00001XXX) and a Master Non-acknowledge. Once recognized, the device switches to HS-mode communication. Read/write data transfers then proceed as described in the sequences above. Devices return to the FS-mode after a STOP occurrence on the bus.

Sequence 5: HS-mode data transfer of the Master writing multiple bytes to the Slave

| Speed | FS-mode | | | HS-mode | | | | | | | | FS-mode |
|--------|---------|--------|------|---------|---------|-----|----|-----|------|-----|---|---------|
| Master | S | M-code | NACK | Sr | SAD + W | | RA | | DATA | | P | |
| Slave | | | | | | ACK | | ACK | | ACK | | |

n bytes + ack.

Sequence 6: HS-mode data transfer of the Master receiving multiple bytes of data from the Slave

| Speed | FS-mode | | | HS-mode | | | | |
|--------|---------|--------|------|---------|---------|-----|----|-----|
| Master | S | M-code | NACK | Sr | SAD + W | | RA | |
| Slave | | | | | | ACK | | ACK |

| Speed | HS-mode | | | | | | | FS-mode |
|--------|---------|---------|-----|------|-----|------|------|---------|
| Master | Sr | SAD + R | | | | | NACK | P |
| Slave | | | ACK | DATA | ACK | DATA | | |


(n-1) bytes + ack.



± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications


PART NUMBER:
KX134-1211
Rev. 1.0
31-Jul-2019

I²C Timing Diagram

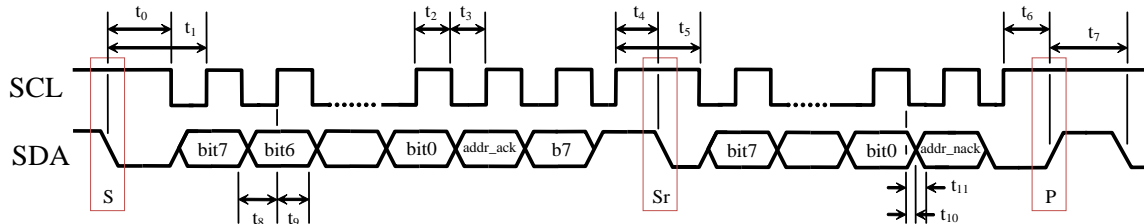

| Number | Description | MIN | MAX | Units |
|-----------------|--|-----|-----|-------|
| t ₀ | SDA LOW to SCL LOW transition (Start event) | 50 | - | ns |
| t ₁ | SDA LOW to first SCL rising edge | 100 | - | ns |
| t ₂ | SCL pulse width: HIGH | 100 | - | ns |
| t ₃ | SCL pulse width: LOW | 100 | - | ns |
| t ₄ | SCL HIGH before SDA falling edge (Start Repeated) | 50 | - | ns |
| t ₅ | SCL pulse width: HIGH during a S/Sr/P event | 100 | - | ns |
| t ₆ | SCL HIGH before SDA rising edge (Stop) | 50 | - | ns |
| t ₇ | SDA pulse width: HIGH | 25 | - | ns |
| t ₈ | SDA valid to SCL rising edge | 50 | - | ns |
| t ₉ | SCL rising edge to SDA invalid | 50 | - | ns |
| t ₁₀ | SCL falling edge to SDA valid (when slave is transmitting) | - | 100 | ns |
| t ₁₁ | SCL falling edge to SDA invalid (when slave is | 0 | - | ns |
| Note | Recommended I ² C CLK | 2.5 | - | μs |

Table 8: I²C Timing (Fast Mode)

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

SPI Communications

4-Wire SPI Interface

The KX134-1211 also utilizes an integrated 4-Wire Serial Peripheral Interface (SPI) for digital communication. The SPI interface is primarily used for synchronous serial communication between one Master device and one or more Slave devices. The Master, typically a micro controller, provides the SPI clock signal (SCLK) and determines the state of Chip Select (nCS). The KX134-1211 always operates as a Slave device during standard Master-Slave SPI operation.

4-wire SPI is a synchronous serial interface that uses two control and two data lines. With respect to the Master, the Serial Clock output (SCLK), the Data Output (SDI or MOSI) and the Data Input (SDO or MISO) are shared among the Slave devices. The Master generates an independent Chip Select (nCS) for each Slave device that goes LOW at the start of transmission and goes back HIGH at the end. The Slave Data Output (SDO) line, remains in a high-impedance (hi-z) state when the device is not selected, so it does not interfere with any active devices. This allows multiple Slave devices to share a master SPI port as shown in Figure 4 below.

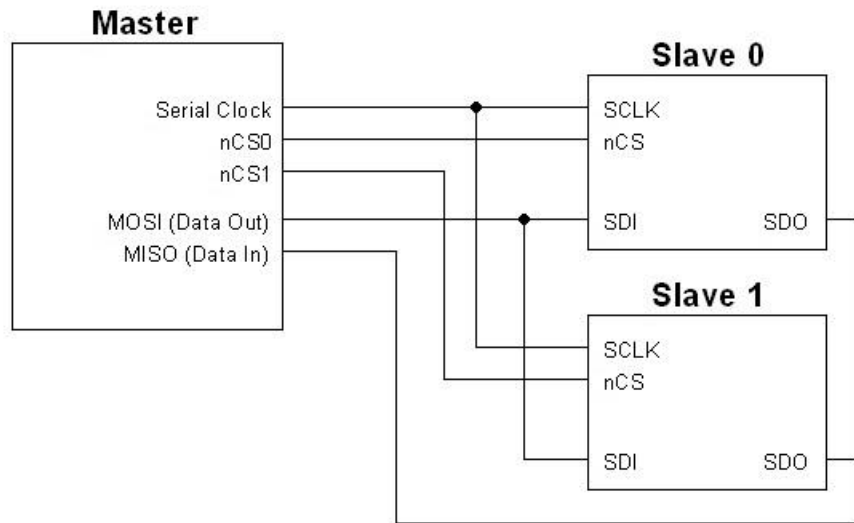



Figure 4. 4-wire SPI Connections



**± 8g / 16g / 32g / 64g Tri-axis
Digital Accelerometer
Specifications**

PART NUMBER:
KX134-1211
Rev. 1.0
31-Jul-2019

4-Wire SPI Timing Diagram

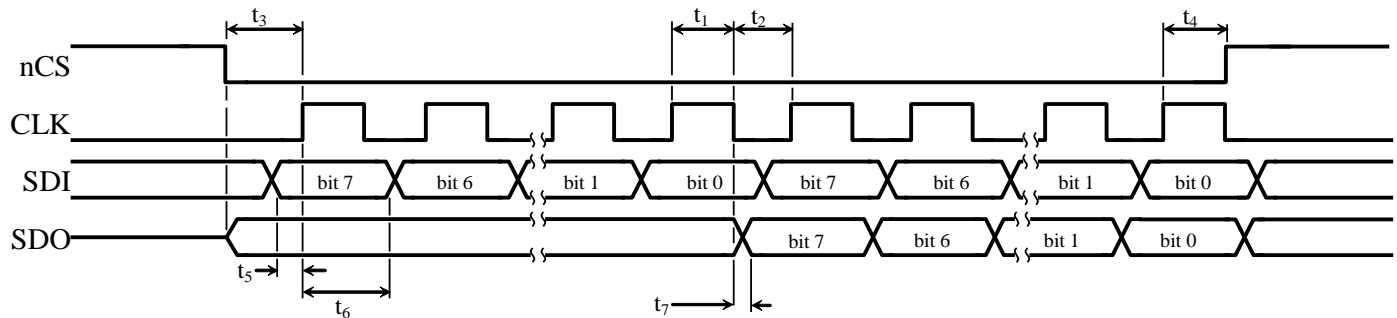

| Number | Description | MIN | MAX | Units |
|--------|---|-----|-----|-------|
| t_1 | CLK pulse width: HIGH | 45 | | ns |
| t_2 | CLK pulse width: LOW | 45 | | ns |
| t_3 | nCS LOW to first CLK rising edge | 20 | | ns |
| t_4 | nCS LOW after the final CLK rising edge to nCS HIGH | 20 | | ns |
| t_5 | SDI valid to CLK rising edge | 10 | | ns |
| t_6 | CLK rising edge to SDI invalid | 10 | | ns |
| t_7 | CLK falling edge to SDO valid | | 35 | ns |

Table 9: 4-Wire SPI Timing

Notes

- t_7 is only present during reads.
- Timings are for VDD of 1.8V to 3.6V with 1k Ω pull-up resistor and maximum 20pF load capacitor on SDO.



± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KX134-1211

Rev. 1.0

31-Jul-2019

4-Wire Read and Write Registers

The registers embedded in the KX134-1211 accelerometer have 8-bit addresses. Upon power up, the Master must write to the accelerometer's control registers to set its operational mode. On the falling edge of nCS, a 2-byte command is written to the appropriate control register. The first byte initiates the write to the appropriate register, and is followed by the user-defined, data byte. The MSB (Most Significant Bit) of the register address byte will indicate "0" when writing to the register and "1" when reading from the register. This operation occurs over 16 clock cycles. All commands are sent MSB first. **The host must return nCS HIGH for at least one clock cycle before the next data request.** However, when data is being read from a buffer read register (BUF_READ), the nCS signal can remain LOW until the buffer is read. Figure 5 below shows the timing diagram for carrying out an 8-bit register write operation.

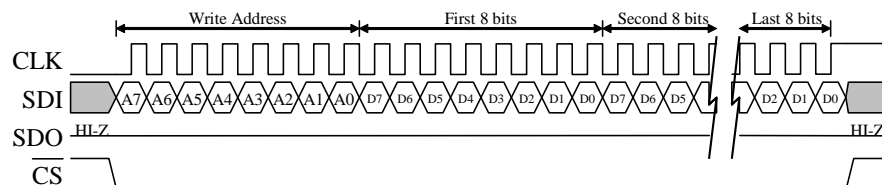


Figure 5: Timing Diagram for 8-Bit Register Write Operation

In order to read an 8-bit register, an 8-bit register address must be written to the accelerometer to initiate the read. The MSB of this register address byte will indicate "0" when writing to the register and "1" when reading from the register. Upon receiving the address, the accelerometer returns the 8-bit data stored in the addressed register. This operation also occurs over 16 clock cycles. All returned data is sent MSB first, and the host must return nCS HIGH for at least one clock cycle before the next data request. Figure 6 shows the timing diagram for an 8-bit register read operation.

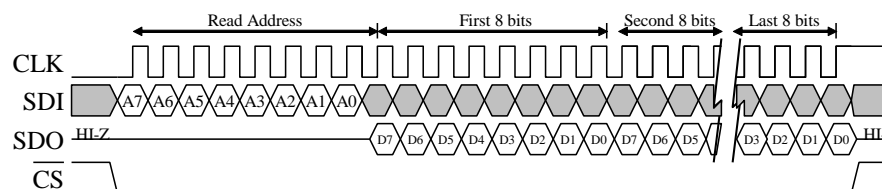



Figure 6: Timing Diagram for 8-Bit Register Read Operation

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

3-Wire SPI Interface

The KX134-1211 also utilizes an integrated 3-Wire Serial Peripheral Interface (SPI) for digital communication. 3-wire SPI is a synchronous serial interface that uses two control lines and one data line. With respect to the Master, the Serial Clock output (SCLK), the Data Output/Input (SDI) are shared among the Slave devices. The Master generates an independent Chip Select (nCS) for each Slave device that goes LOW at the start of transmission and goes back HIGH at the end. This allows multiple Slave devices to share a master SPI port as shown in Figure 7 below.

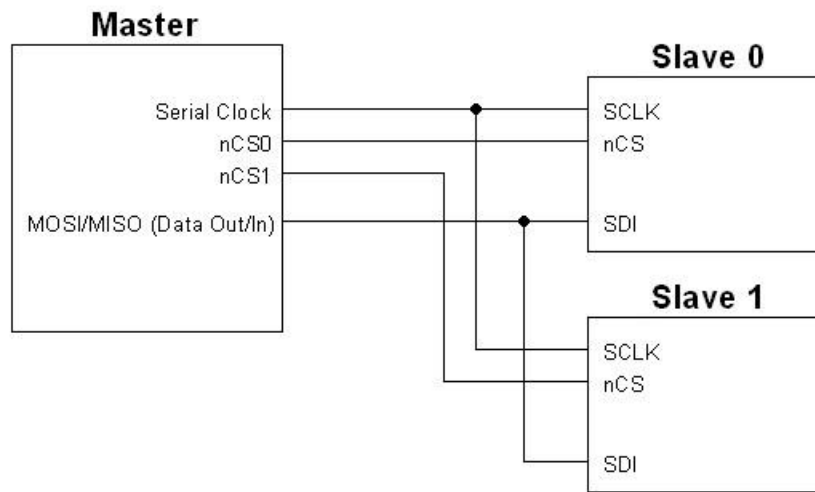


Figure 7: KX134-1211 3-wire SPI Connections



± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications


PART NUMBER:

KX134-1211

Rev. 1.0

31-Jul-2019

3-Wire SPI Timing Diagram

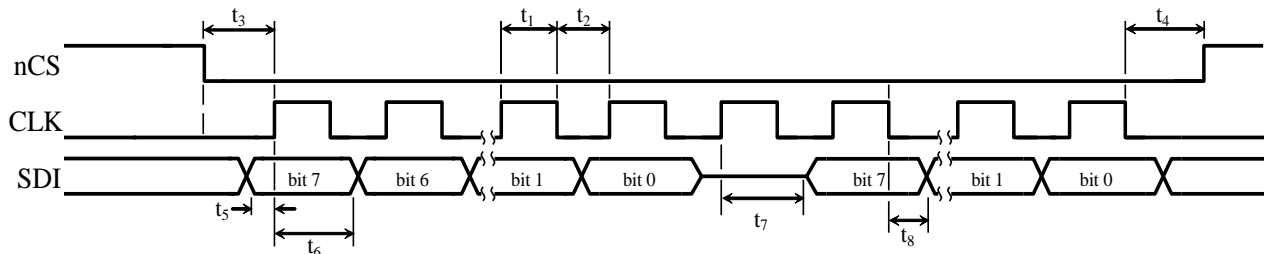


| Number | Description | MIN | MAX | Units |
|----------------|---|-----|-----|-------|
| t ₁ | CLK pulse width: HIGH | 45 | - | ns |
| t ₂ | CLK pulse width: LOW | 45 | - | ns |
| t ₃ | nCS LOW to first CLK rising edge | 20 | - | ns |
| t ₄ | nCS LOW after the final CLK falling edge to nCS HIGH | 20 | - | ns |
| t ₅ | SDI valid to CLK rising edge | 10 | - | ns |
| t ₆ | CLK rising edge to SDI input invalid | 10 | - | ns |
| t ₇ | CLK extra clock cycle rising edge to SDI output becomes | - | - | ns |
| t ₈ | CLK falling edge to SDI output becomes valid | - | 35 | ns |

Table 10: 3-Wire SPI Timing

Notes

1. t₇ and t₈ are only present during reads
2. Timings are for VDD of 1.8V to 3.6V with 1kΩ pull-up resistor and maximum 20pF load capacitor on SDI.
3. The SDO/ADDR pin is configured in a high-impedance input-state, and must be externally tied to GND or IO_VDD

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

3-Wire Read and Write Registers

The registers embedded in the KX134-1211 accelerometer have 8-bit addresses. Upon power up, the Master must write to the accelerometer's control registers to set its operational mode. On the falling edge of nCS, a 2-byte command is written to the appropriate control register. The first byte initiates the write to the appropriate register, and is followed by the user-defined, data byte. The MSB (Most Significant Bit) of the register address byte will indicate "0" when writing to the register and "1" when reading from the register. A read operation occurs over 17 clock cycles and a write operation occurs over 16 clock cycles. All commands are sent MSB first. **The host must return nCS HIGH for at least one clock cycle before the next data request.** However, when data is being read from a buffer read register (BUF_READ), the nCS signal can remain LOW until the buffer is read. Figure 8 below shows the timing diagram for carrying out an 8-bit register write operation.

NOTE** If a STOP condition is sent on the least significant bit of write data or the following master acknowledge cycle, the last write operation is not guaranteed and it would cause unexpected register write.

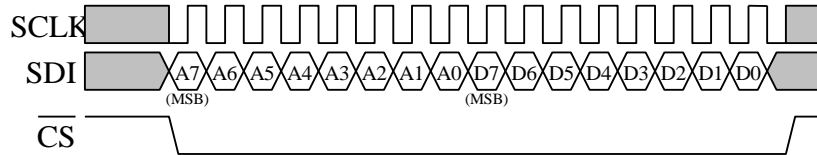


Figure 8: Timing Diagram for 8-Bit Register Write Operation

In order to read an 8-bit register, an 8-bit register address must be written to the accelerometer to initiate the read. The MSB of this register address byte will indicate "0" when writing to the register and "1" when reading from the register. Upon receiving the address, the accelerometer returns the 8-bit data stored in the addressed register. **For 3-wire read operations, one extra clock cycle between the address byte and the data output byte is required.** Therefore, this operation occurs over 17 clock cycles. All returned data is sent MSB first, and the host must return nCS HIGH for at least one clock cycle before the next data request. Figure 9 shows the timing diagram for an 8-bit register read operation.

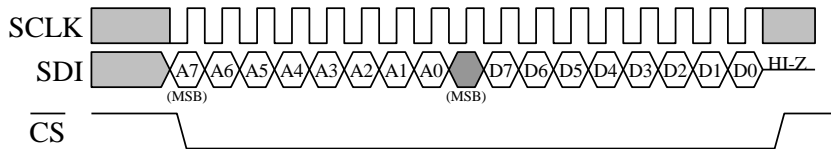




Figure 9: Timing Diagram for 8-Bit Register Read Operation

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Revision History

| Revision | Description | Date |
|----------|---------------------|-------------|
| 1.0 | Production Release. | 31-Jul-2019 |

"Kionix" is a registered trademark of Kionix, Inc. Products described herein are protected by patents issued or pending. No license is granted by implication or otherwise under any patent or other rights of Kionix. The information contained herein is believed to be accurate and reliable but is not guaranteed. Kionix does not assume responsibility for its use or distribution. Kionix also reserves the right to change product specifications or discontinue this product at any time without prior notice. This publication supersedes and replaces all information previously supplied.

| | | |
|---|---|---|
|  | ± 8g / 16g / 32g / 64g Tri-axis Digital Accelerometer Specifications | PART NUMBER: KX134-1211 Rev. 1.0 31-Jul-2019 |
|---|---|---|

Appendix

The following Notice is included to guide the use of Kionix products in its application and manufacturing processes. Kionix, Inc., is a ROHM Group company. For purposes of this Notice, the name "ROHM" would also imply Kionix, Inc.