



TAOGLAS®



Datasheet

GPDF357B

Part No:
GPDF357B

Description:

Embedded GPS L1/L2 Dual Pin Stacked Patch Antenna
Covering 1227.6/1575.42 MHz

Features:

Dual-Pin Stacked Patch, Dual Feed

Covering Bands:

- GPS L1
- GPS L2
- Galileo E1

Low Axial Ratio

Dimensions: 35*35*7.15 mm

Ground Plane size: 35*35 mm

RoHS & Reach Compliant

1. Introduction	3
2. Specifications	5
3. Passive Antenna Characteristics	7
4. Radiation Patterns	12
5. Mechanical Drawing	15
6. Packaging	16
Changelog	17

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The Taoglas GPDF357B is a precision-engineered embedded stacked passive GPS patch antenna supporting both GPS L1/Galileo E1 and L2 bands. It consists of two patches stacked with two pin feeds (one for each patch), the bottom patch is 35*35*4mm and the top patch is 25*25*3mm – making the overall dimensions just 35*35*7mm. The antenna has been tuned and tested on a 70*70mm specifically for GPS L1/Galileo E1: 1575.42MHz and GPS L2:1227.6MHz.

Both patch elements have low axial ratio. The antenna exhibits excellent gain and good radiation pattern stability leading to a reliable GNSS fix in areas of weaker signal strength. All these elements combined ensure the best possible positional accuracy for your device.

Features:

- Multi-GNSS, high-performance passive antenna
- Excellent signal to noise ratio (C/N0)
- Good 2DRMS and fast TTFF
- Axial ratio < 2dB typ. across all bands

Benefits:

- Excellent positional accuracy
- Great for use in difficult environments
- Multiband improves the receiver's position estimation in terms of accuracy and reliability
- Ideal antenna solution for multiband RTK systems.
-

Typical applications include:

- High accuracy positioning and navigation systems
- UAVs, Robotics & Autonomous Vehicles
- Mapping & GIS
- Transportation & Telematics
- Precision Agriculture
- Public Safety, Search & Rescue
- RTK Systems

The GPDF357B is manufactured and tested in a TS16949 first tier automotive approved facility.


This patch can also be purchased in a version tuned specifically for 70*70mm ground plane, GPDF357A. Patch antennas can also be tuned to customer-specific device environments, subject to NRE and MOQ. Contact your regional Taoglas customer support team to request these services or additional support to integrate and test this antenna's performance in your device.



2. Specifications

GNSS Electrical					
GPS	L1	L2	L5		
	■	■	□		
GLONASS	G1	G2	G3		
	□	□	□		
Galileo	E1	E5a	E5b	E6	
	■	□	□	□	
BeiDou	B1	B2a	B2b	B3	
	□	□	□	□	
QZSS (Regional)	L1	L2C	L5	L6	
	■	■	□	□	
IRNSS (Regional)	L5				
	□				
SBAS	L1/E1/B1	L5/B2a/E5a	G1	G2	G3
	■	□	□	□	□

*SBAS systems: WASS(L1/L5), EGNOS(E1/E5a), SDCM(G1/G2/G3), SNAS(B1,B2a), GAGAN(L1/L5), QZSS(L1/L5), KAZZ(L1/L5).

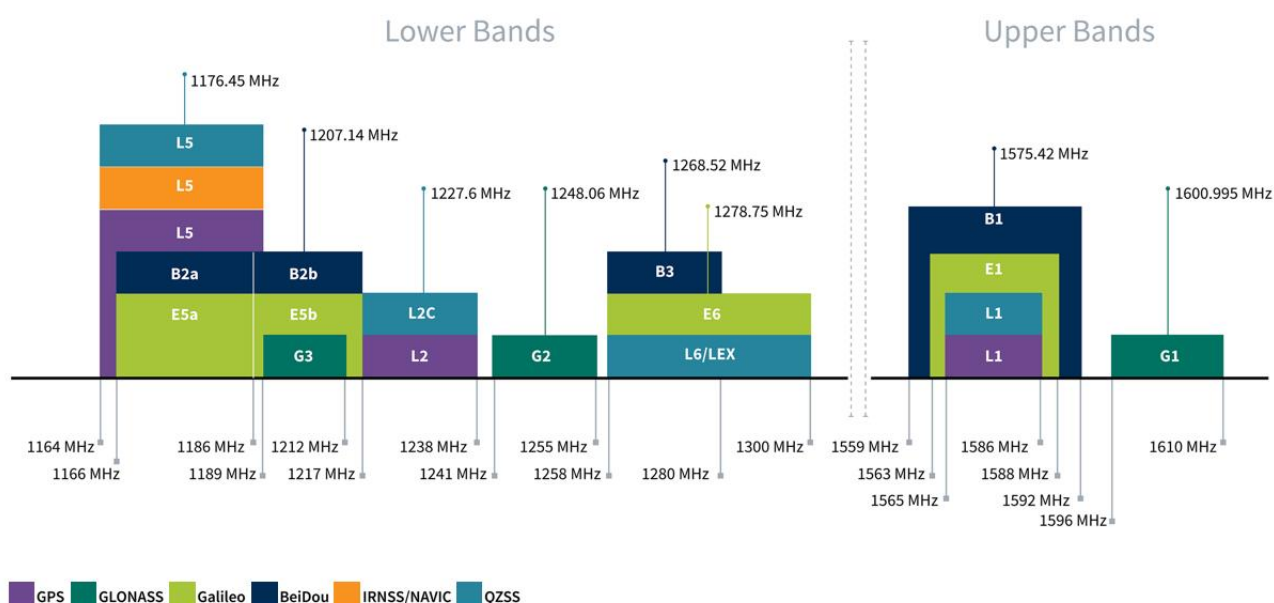


GNSS Electrical		
Frequency (MHz)	1227.6	1575.42
Return Loss (dB)	< -13	< -14
Efficiency (%)	47.9	27.9
Peak Gain at Zenith (dBi)	2.8	-1.3
Average Gain (dB)	-3	-5.5
Axial Ratio (dB)	< 2	< 2
Polarization	R.H.C.P.	
Impedance	50Ω	

Note. Tuned on 35x35 mm ground plane.


Mechanical	
Ceramic Dimension	35 x 35 x 7.15mm
Standard Ground Plane Size	35x35mm
Pin Length	2mm
Weight	25.2g
Environmental	
Operation Temperature	-30°C to 80°C
Storage Temperature	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH

3. Passive Antenna Characteristics


3.1 Return Loss

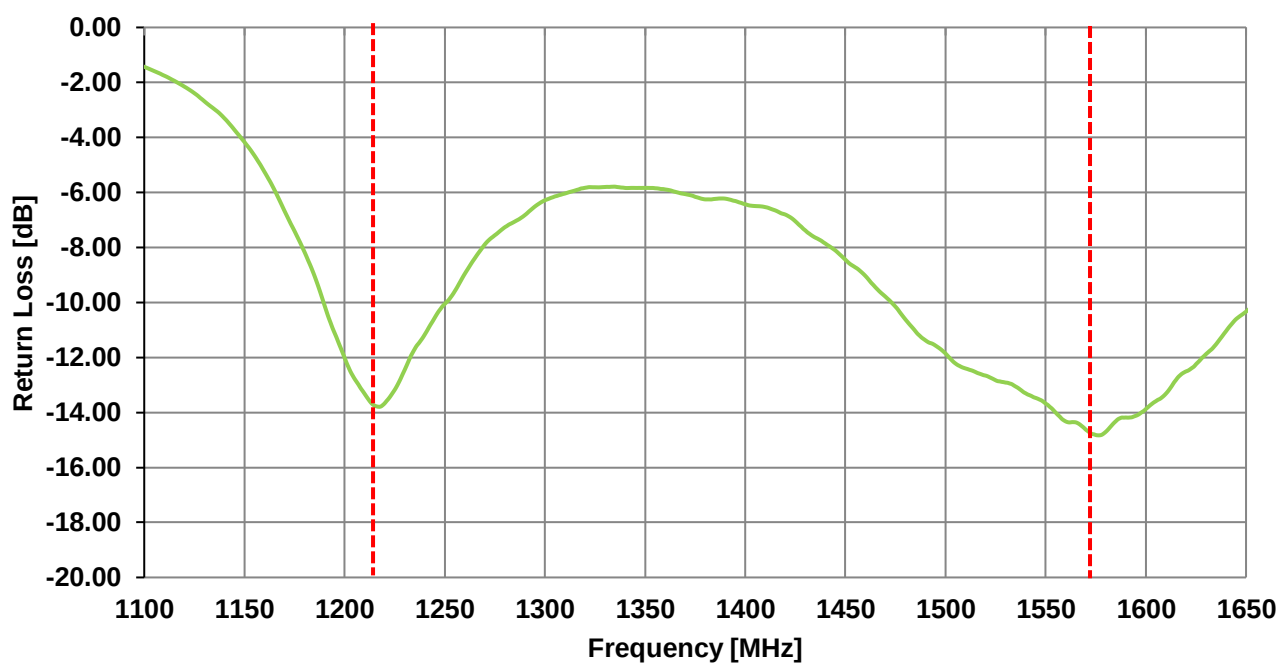


3.2 Efficiency

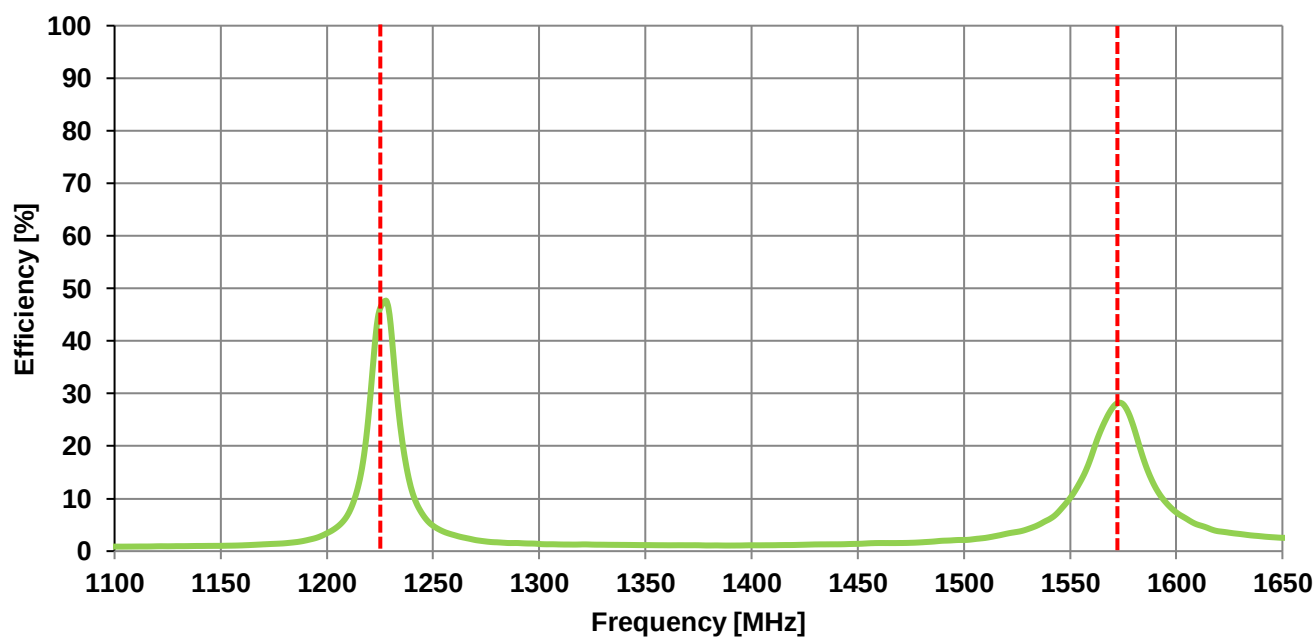


3.3 Average Gain

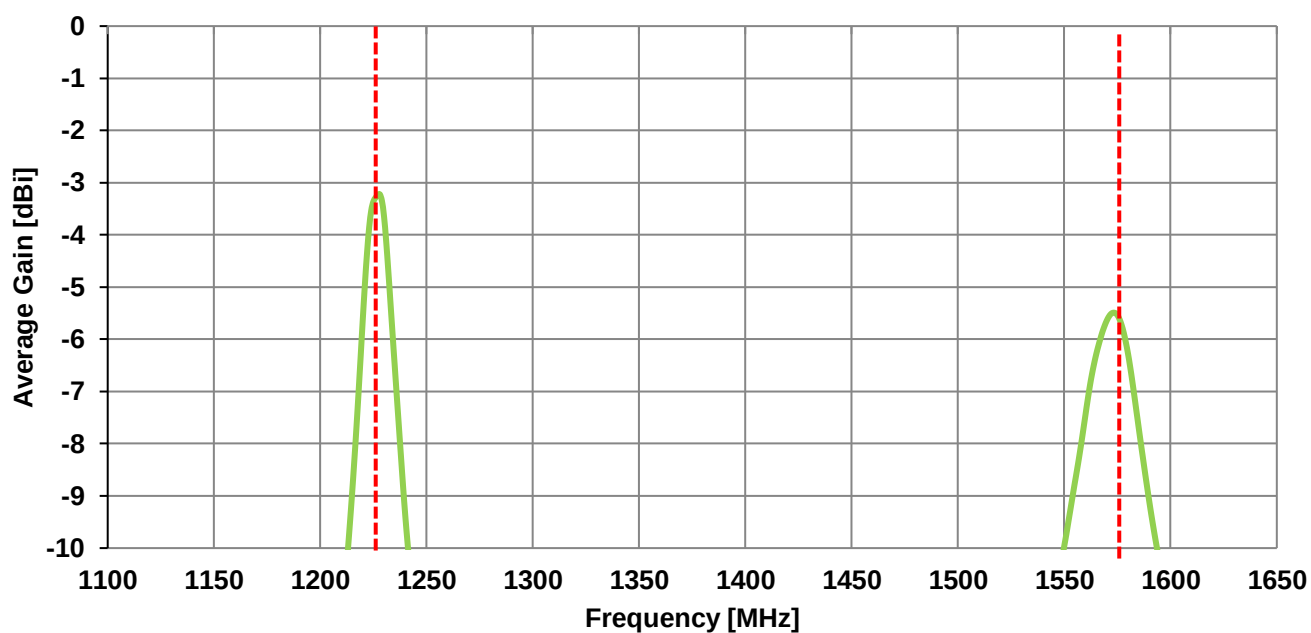


3.4 Peak Gain

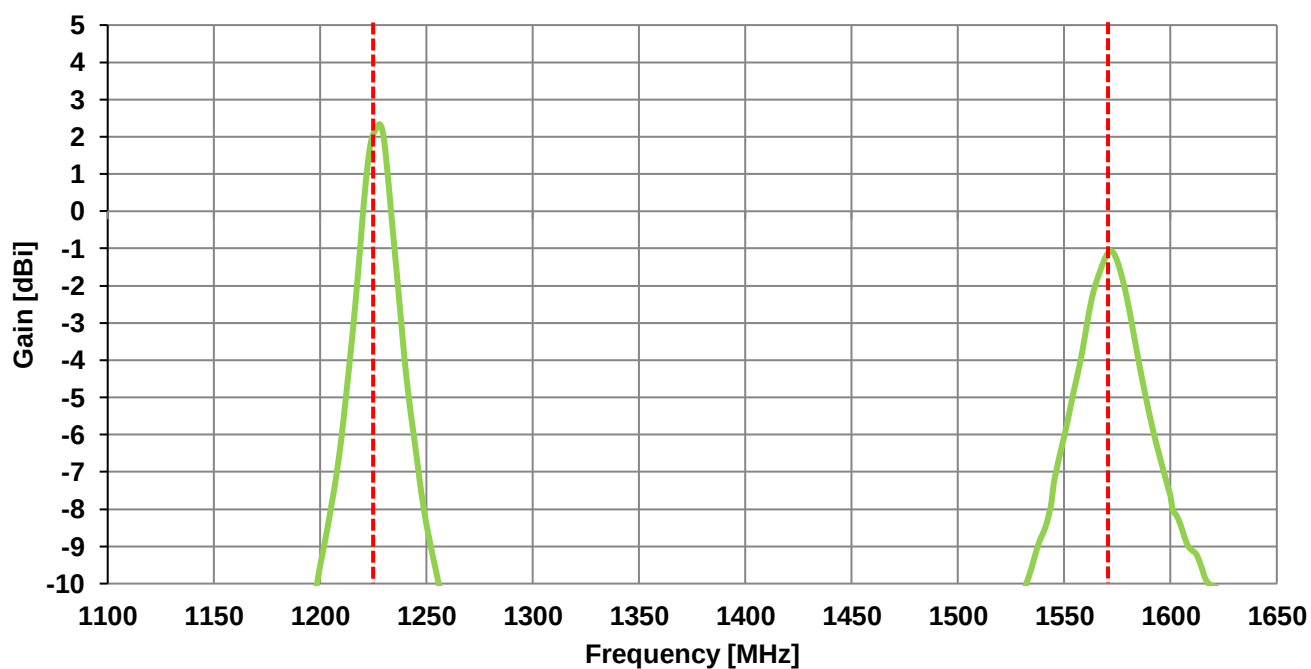


3.5 GPS L2 Axial Ratio vs Frequency

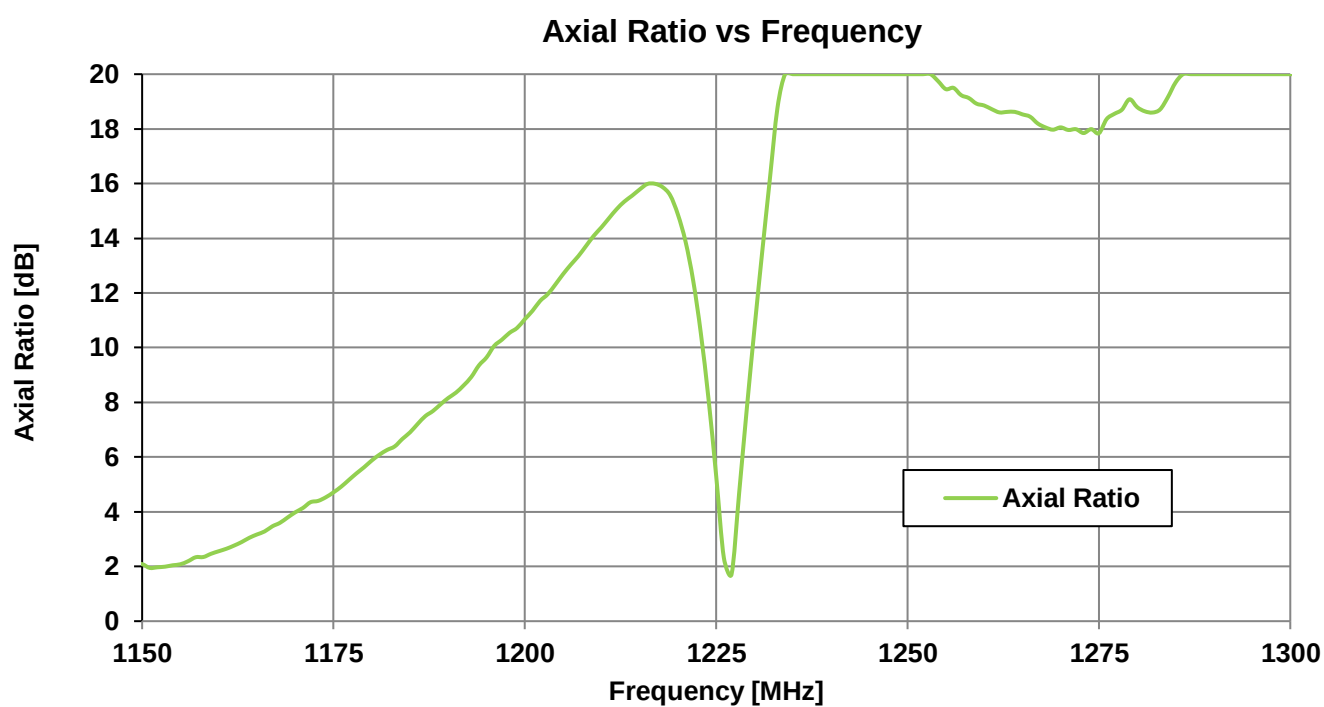


3.6 GPS L1 Axial Ratio vs Frequency

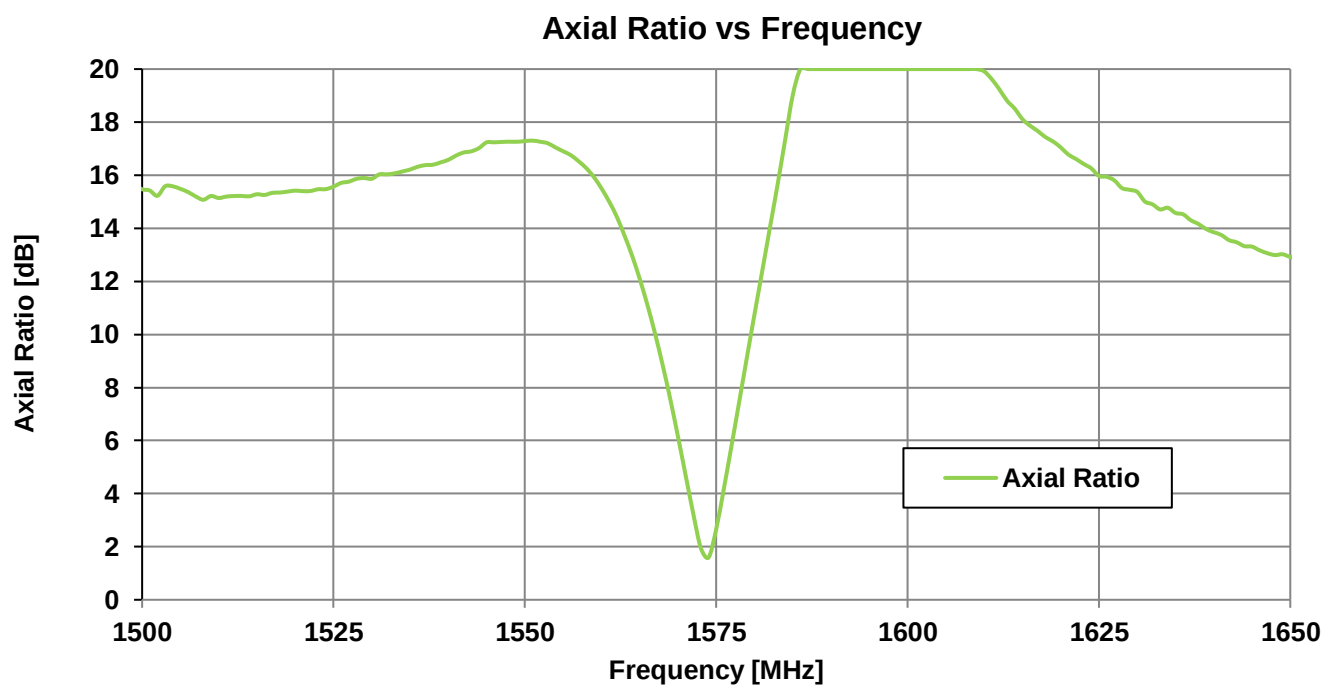


3.7 GPS L2 Axial Ratio vs Degrees

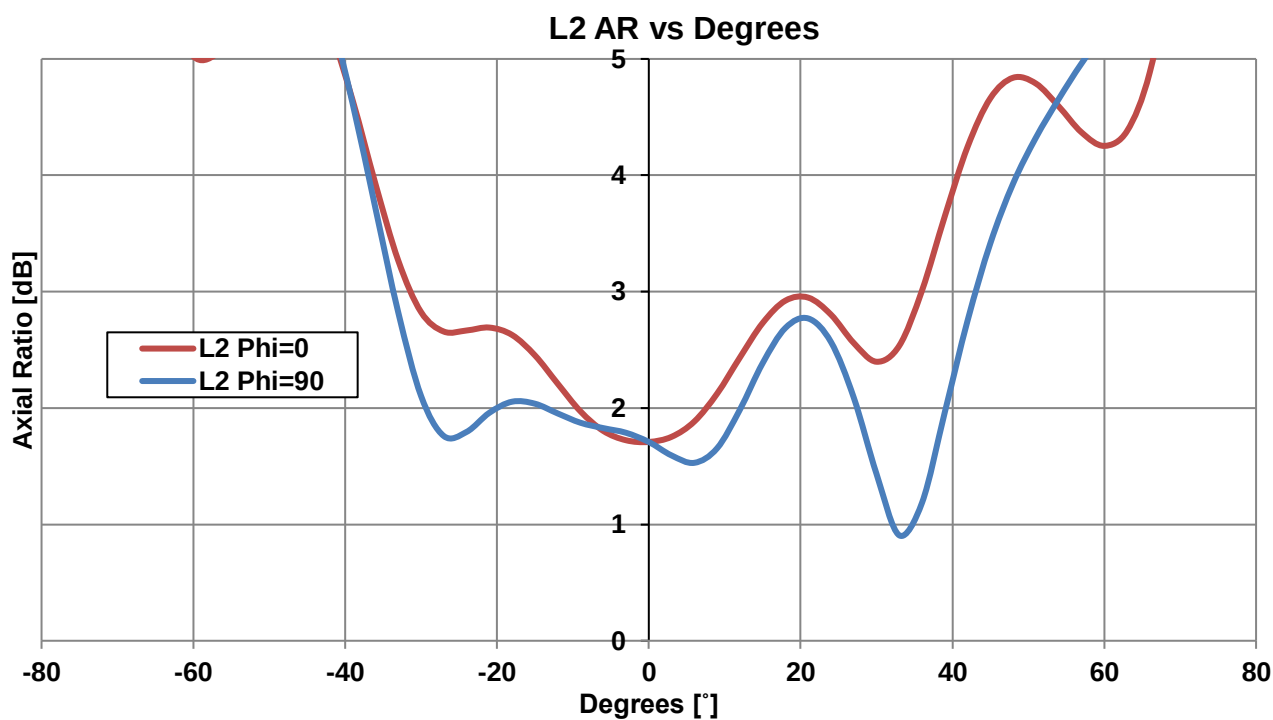


3.8 GPS L1 Axial Ratio vs Degrees

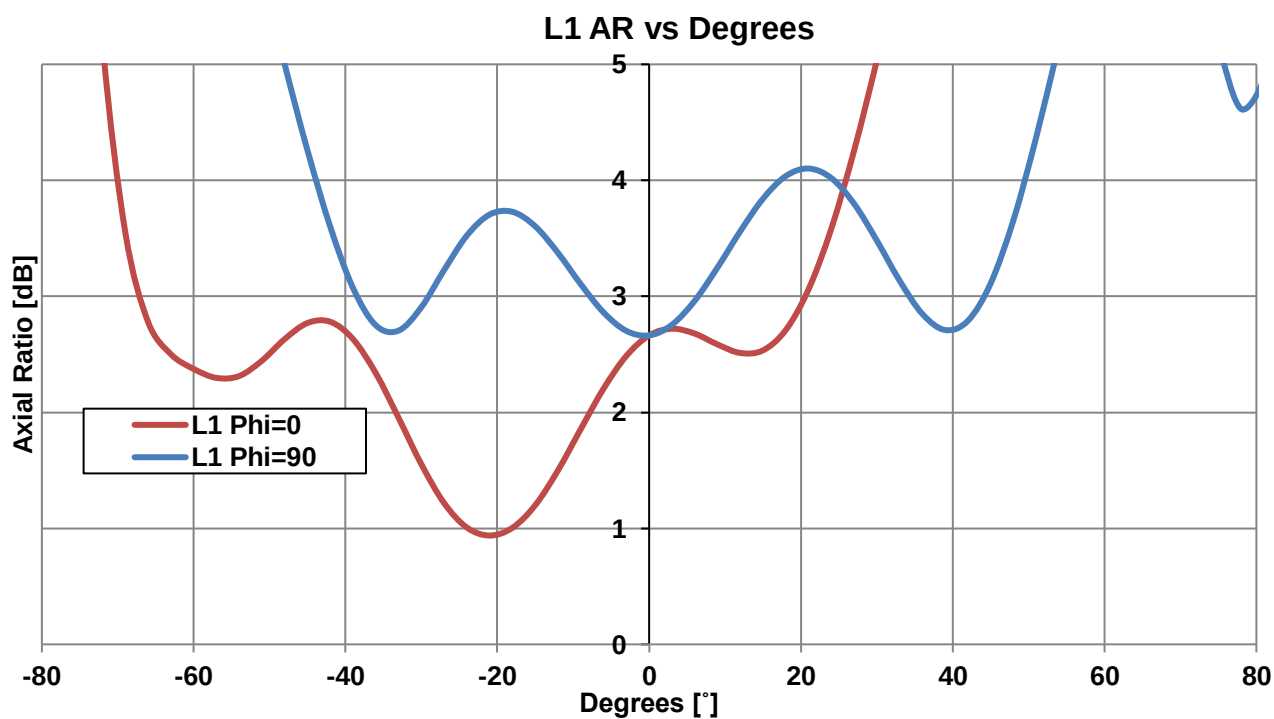


3.9 Isolation

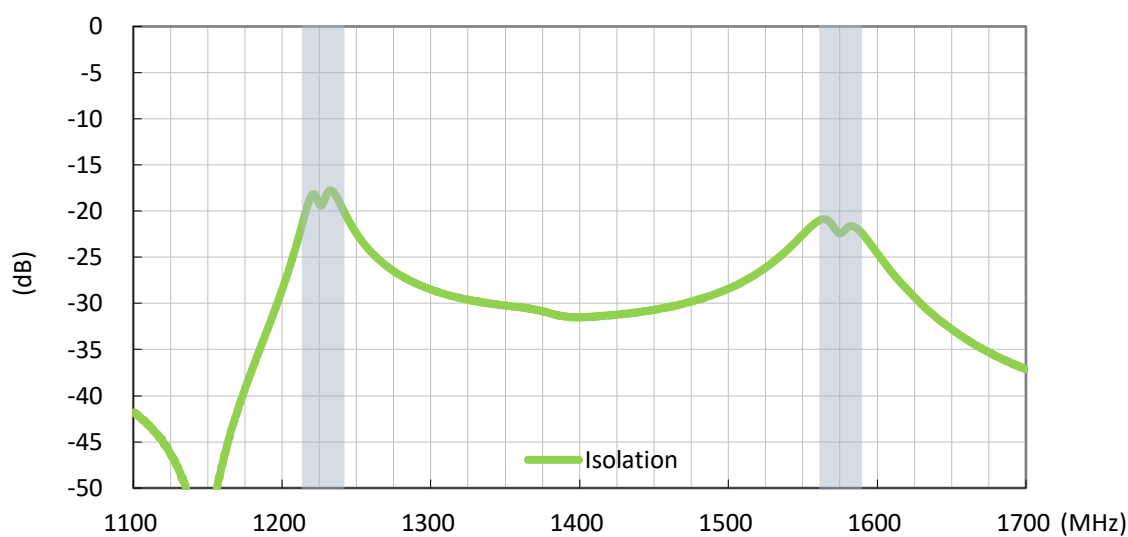

3.10 Group Delay vs Frequency

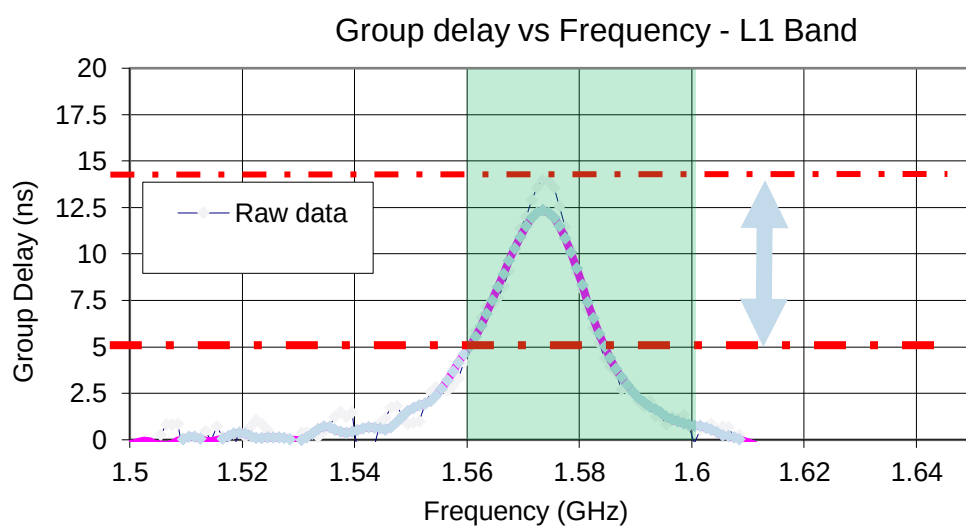


3.11 Group Delay vs Frequency

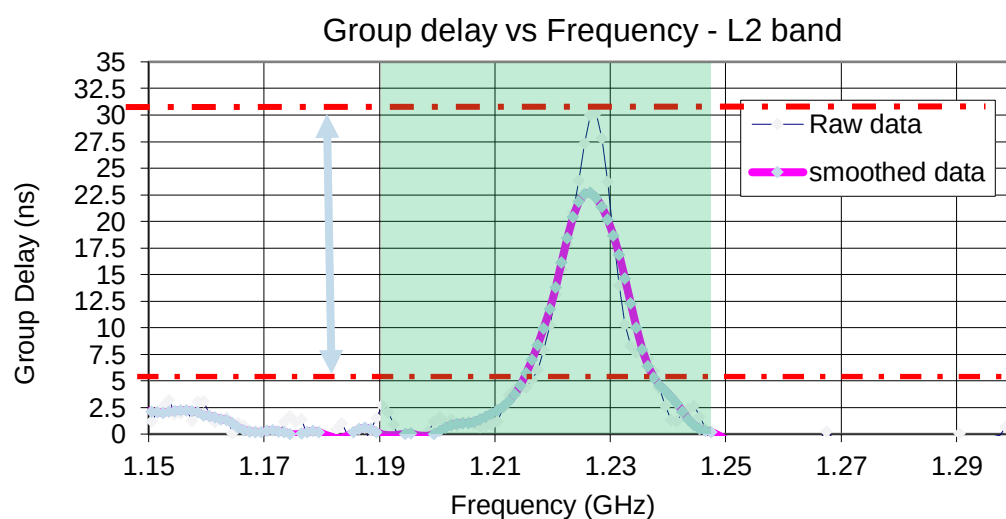


4. Radiation Patterns

4.1 Test Setup

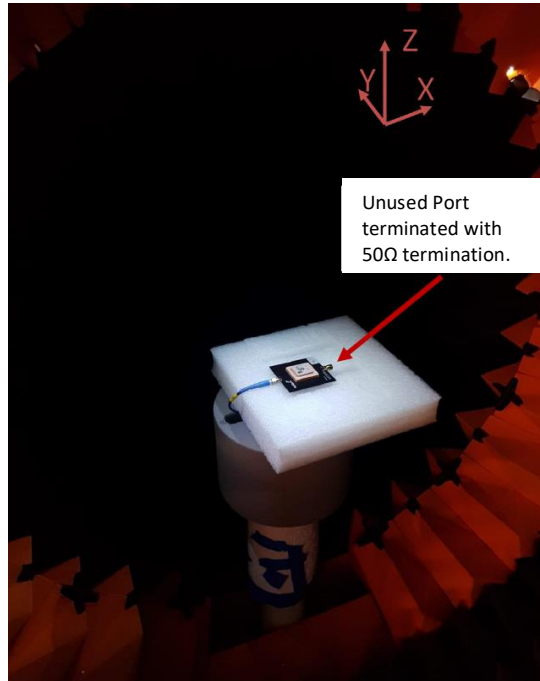




4.2 1227.6MHz 3D and 2D Radiation Patterns

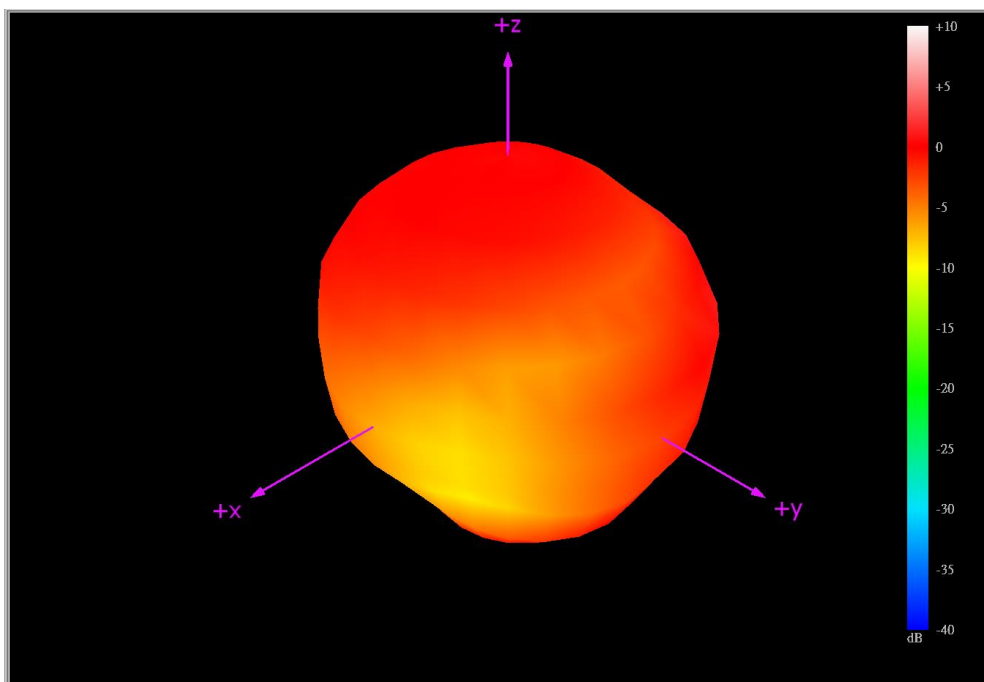


XY Plane

XZ Plane

YZ Plane

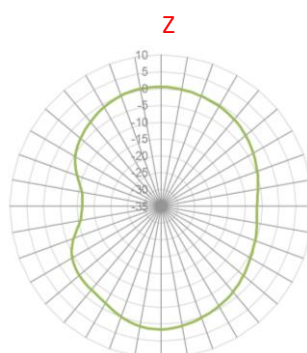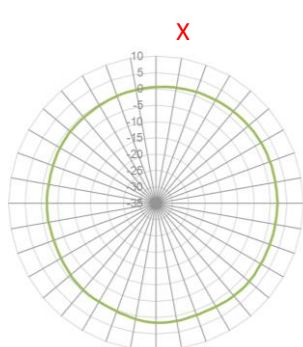




4.3 1575.42MHz 3D and 2D Radiation Patterns

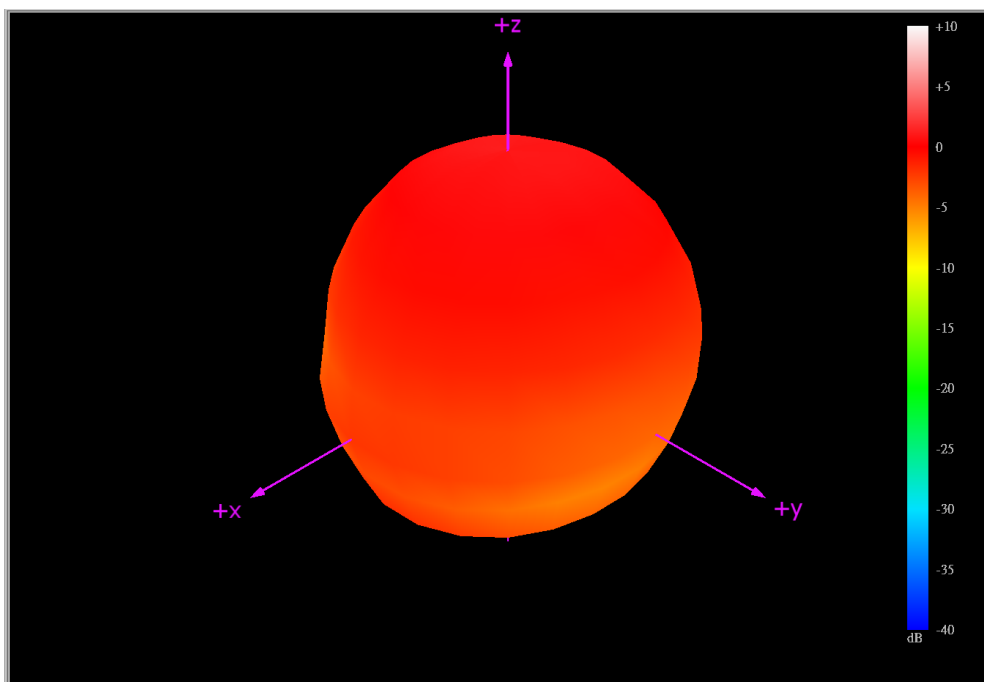

XY Plane

XZ Plane

YZ Plane

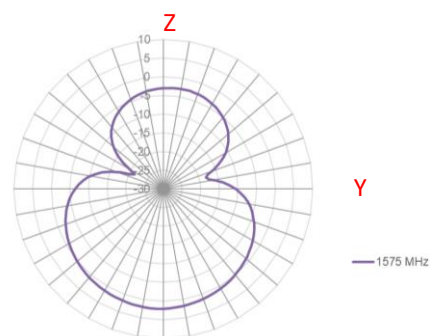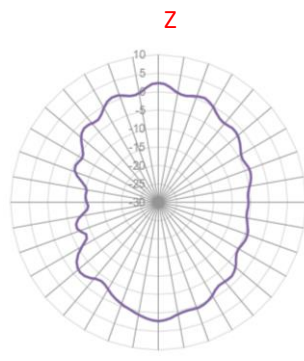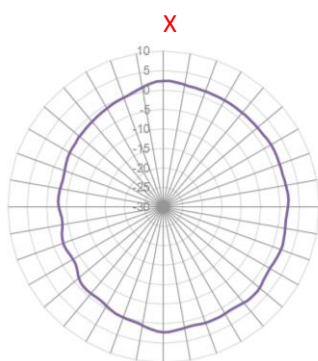




5. Mechanical Drawing (Units: mm)

ISO NO.: EDW-20-8-0150

STATE: Release

NOTES: 1. Double sided adhesive area, 
2. Silver area, 
3. Release paper area, 

REV.	DESCRIPTION	ENG.	APPROVED	DATE
D01	Initial Design	Rachel Di	Clark	2020/02/27

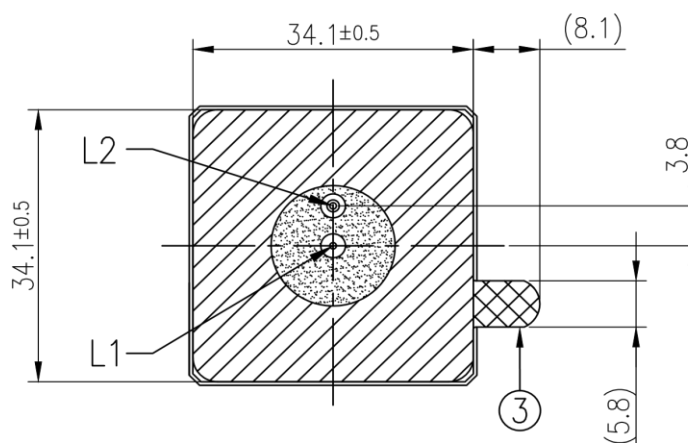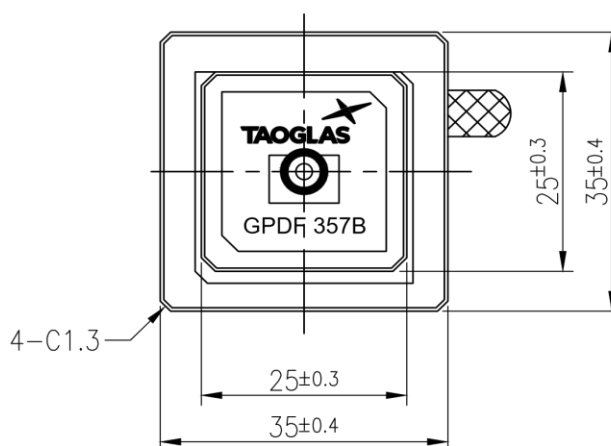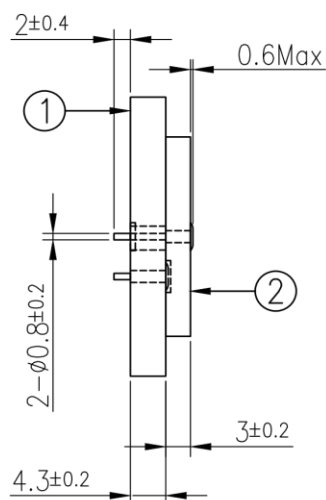

	Name	Material	Finish	QTY
1	Patch-1(35x35x4mm)	Ceramic	Clear	1
2	Patch-2(25x25x3mm)	Ceramic	Clear	1
3	Double sided Adhesive	NITTO 5015	White Liner	1


APPROVED BY: Clark	 TAOGLAS TW Design Centre This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.
CHECK BY: Aaron	
DRAWN BY: Rachel Di	
DATE: 2020/02/27	TITLE : GPS/GALILEO Dual Feed Stacked Patch Antenna L1:1575MHz L2:1227MHz 35*35*7mm tuned for 35*35 Ground
UNLESS OTHERWISE SPECIFIED TOLERANCES ON: XX±0.5 X±0.3 X±0.2 XX±0.1 XXX±0.05	PART NO. : GPDF357B
THIRD ANGLE PROJECTION 	UNIT: mm SCALE: 1.25:1 PAGES: 1/1 REV: D01

6. Packaging


12pcs GPDF357B per Tray
Weight: 360g



72pcs GPDF357B per PE Bag and Inside Box
Dimensions: 261*152*118 mm
Weight: 3Kg

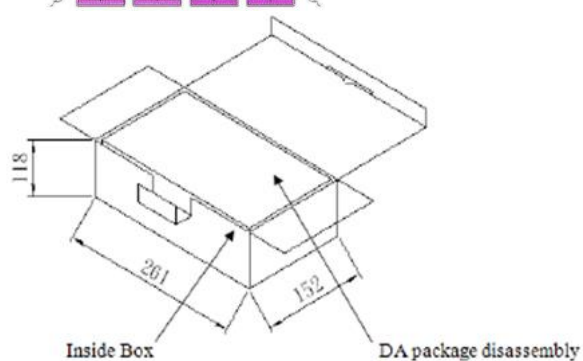

288pcs GPDF357B per carton
Dimensions - 330*280*270mm
Weight -12.4Kg

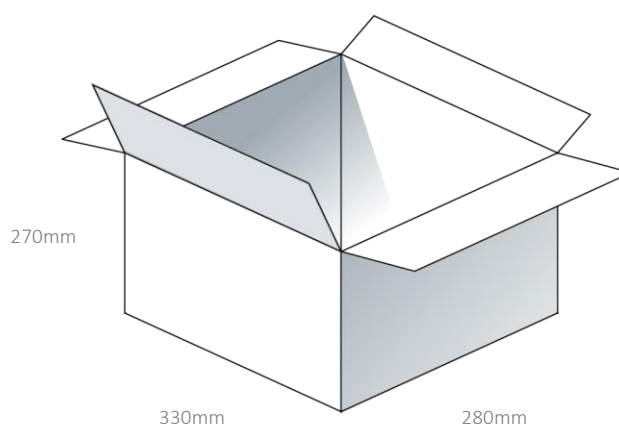

Changelog for the datasheet

SPE-20-8-062-A – GPDF357B

Revision: A (Current Version)	
Date:	2020-05-29
Changes:	Initial Release
Changes Made by:	Jack Conroy

Previous Revisions



www.taoglas.com