



New on v3:  
 Change to ATmega32U4  
 Switch to microUSB  
 Change to 8MHz Xtal  
 Add battery voltage detect  
 Add Charge Status to ATmega  
 Update reset switch  
 Removed FTDI Connection  
 Re-arranged and re-named SPI pins  
 Re-ordered Analog pins  
 Changed PWM pin designator to ~  
 Changed VCC to 3.3V

New on v31:

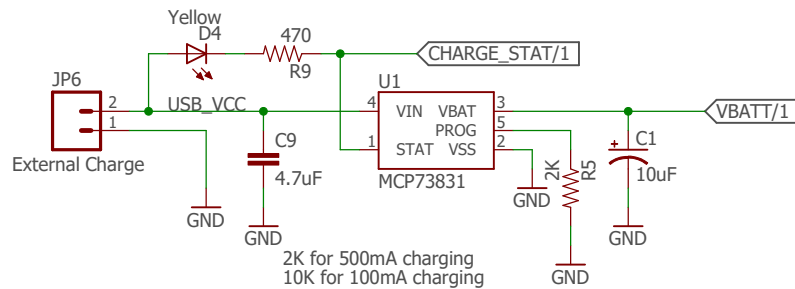

Released under the Creative Commons Attribution Share-Alike 3.0 License <a href="http://creativecommons.org/licenses/by-sa/3.0">http://creativecommons.org/licenses/by-sa/3.0</a>	FIO_LOGO 
TITLE: Arduino-Fio	SFE 
Design by: Shigeru Kobayashi N. Seidle Revision By: T. Klopfenstein	REV: v31
Date: 2/11/2019 1:06 PM	Sheet: 1/2

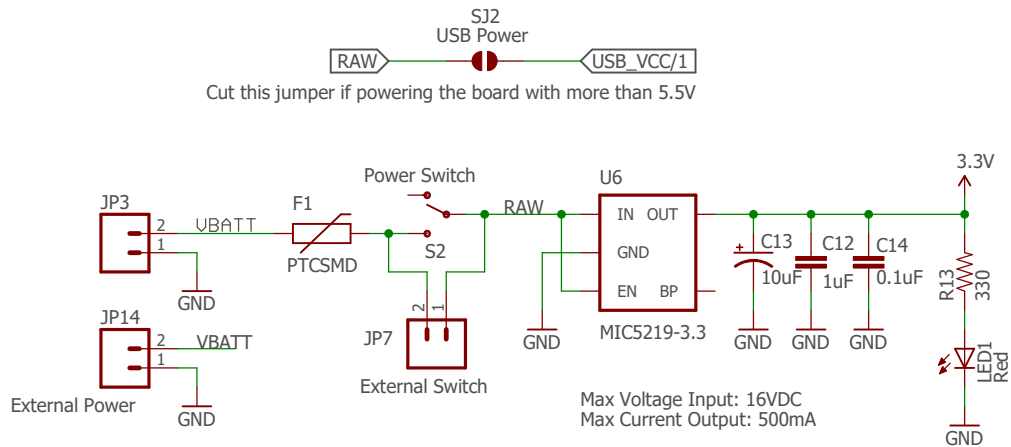

Released under the Creative Commons  
Attribution Share-Alike 3.0 License  
<http://creativecommons.org/licenses/by-sa/3.0>

TITLE: Arduino-Fio

Design by:

REV:

Date: 2/11/2019 1:06 PM

Sheet: 2/2